

SINCE  
1987

HOME ENERGY RETROFIT—GOING FOR NET-ZERO

# home power

**SOLAR ▶ WIND ▶ HYDRO ▶ DESIGN ▶ BUILD**

## Bringing Solar Panels Down To Earth

**Ground Mounting Can Outshine Rooftop Installation**

## Electric Cars at Last!

**What's Coming in 2011 & Beyond**

## Home Insulation Payback

**How Much Can It Save You?**

## Who Needs Battery Backup?

**You Might! Questions to Ask, Gear to Consider**

Oct & Nov 2010, Issue 139

\$6.95 US • \$6.95 CAN



homepower.com



# THE SOLAR DEPOT

ONLY SOLAR DEPOT INSTALLERS DELIVER THE COMPLETE,



## WHAT IS THE SOLAR DEPOT ADVANTAGE?

- ✓ Pre-Engineered Packaged Systems
- ✓ Superior Technical Support
- ✓ Rebate Filing Assistance
- ✓ Jobsite Delivery
- ✓ Lead Referral Program
- ✓ Product Shipment Nationwide
- ✓ Marketing & Advertising Support
- ✓ Financing Options

## DISCOVER SOLAR WITH SOLAR DEPOT

If you are interested in joining the fast-growing solar industry, now is the time! Solar Depot offers intensive training workshops on solar for contractors and sales staff. We offer various workshops focused on solar electric, solar water heating, and solar pool heating. We have trained nearly 5,000 contractors on solar in the past decade. Register today for a workshop with us!

## WHAT DO SOLAR DEPOT DEALERS SAY?

*I could feel the positive energy radiating from everyone at Solar Depot. I feel that everyone there really knows solar, cares about your customers and can't wait to help us become successful!*  
-Ed Smith, Catch the Sun Solar Co.

*There is no way that someone can do the job faster than you guys. Excellent service.*  
-Juan Ramon Alvarez, Albasolar LLC

*The workshop totally exceeded my expectations and was jam-packed with information.*  
-Keith Murray, Balanced Energy



# ADVANTAGE

## QUALITY, SOLAR SYSTEM ON TIME. EVERY TIME.



### **SOLAR DEPOT** **THE INSTALLER'S CHOICE**

With Solar Depot's jobsite delivery service, you can count on your complete solar system arriving when you are ready to install. Why mess with undependable, expensive freight carriers, when you can rely us to deliver to you on our own trucks? Our promise to our customers is on-time delivery, every time.

### **VISIT [WWW.SOLARDEPOT.COM](http://WWW.SOLARDEPOT.COM)**

Explore Solar Depot online! You can access our full product catalog and all of our system packages from our website. Register for a Solar Depot workshop in your area today by clicking on "Workshops." View the Contractor section to learn about our full range of services and how to become an authorized Solar Depot dealer.



**Come visit us at Booth #3945**

**SOLAR PV / SOLAR WATER HEATING / SOLAR POOL / RADIANT FLOOR HEATING**

### **SERVING NATIONWIDE:**

**Petaluma, CA**  
1-800-822-4041

**Sacramento, CA**  
1-800-321-0101

**Corona, CA**  
1-800-680-7922

**St. Augustine, FL**  
1-904-827-9733

**Washington, D.C.**  
1-202-872-5221

**Denver, CO**  
1-303-321-4186





## WE MAKE YOU HAPPY EVEN WHEN SKIES ARE GRAY

While solar power is most effective when the sun is shining, REC panels are superior performers even on cloudy days. REC Peak Energy panels have an improved cell and glass design, increasing energy production by 2 percent in all sunlight conditions.

Learn more about our high performance solar panels at [recgroup.com](http://recgroup.com)



Distributed by:







## Buy from the Best

When you buy from AEE Solar, you can be confident you are getting the best products the industry has to offer. With 30 years of solar experience, we know which products deliver the best value for your money.

And when you add in the broadest product selection in the business, unsurpassed dealer training and tech support, and our renowned *Renewable Energy Design Guide & Catalog* – available only to AEE Solar dealers – you can see why AEE Solar is the only wholesale distributor you'll ever need.


**Become an authorized dealer and get all AEE Solar has to offer.**



### PEAK ENERGY MODULE



Get REC's New High-Efficiency Peak Energy Module from AEE Solar!



MORE POWER PER  
SQUARE FOOT



US-PRODUCED  
SILICON



ROBUST AND  
DURABLE DESIGN



ENERGY PAYBACK  
TIME OF ONE YEAR



800-777-6609

[www.aeesolar.com](http://www.aeesolar.com)  
[sales@aeesolar.com](mailto:sales@aeesolar.com)

THE ONLY WHOLESALE DISTRIBUTOR YOU'LL EVER NEED



Protect your installations and your reputation

# QUICK MOUNT PV®

THE STANDARD IN WATERPROOF ROOF MOUNTS



See us at  
Solar Power  
International in  
Los Angeles,  
Oct 12-14,  
Booth #1426

**IT ONLY TAKES A SMALL LEAK to cause major damage to a customer's roof and home. In fact, most construction-related lawsuits involve water intrusion.**

No matter how well a system is installed, inadequate flashing can fail and place a solar installation business at serious risk. But you don't need to take that risk, thanks to **Quick Mount PV's** industry-leading flashing and mounts that ensure 100% code-compliant, waterproof roof penetrations.

Designed by installers for installers, **Quick Mount PV** installs faster than any other flashed solar mounting, saving you time and money on the job.

- Models for composition, wood shake, and tile roofs
- No roof cutting required
- Works with all standard racking
- All aluminum flashing; 50-year life
- Stainless steel hardware included
- Live tech support
- Year round product trainings

Safeguard your customer's home and your good reputation with **Quick Mount PV**, the industry standard for high-quality, watertight solar installations.



**Superior Waterproofing Technology**  
Our patented mounting technology seals out rain and installs with a single bolt.

COMPOSITION




SHAKE



CURVED TILE



FLAT TILE



CONDUIT



**Quick Mount PV®**  
**RESPECT THE ROOF**

925-687-6686  
[www.quickmountpv.com](http://www.quickmountpv.com)  
[info@quickmountpv.com](mailto:info@quickmountpv.com)



MADE IN USA

AVAILABLE THROUGH ALL MAJOR SOLAR DISTRIBUTORS





[www.SMA-America.com](http://www.SMA-America.com)

## The inverter is the heart of every solar power system.

An inverter transforms the DC power produced by solar panels into utility-compliant AC power, allowing it to be fed into the utility grid. During the transformation process, it is very important that energy loss be minimized. SMA inverters reduce loss and maximize your solar system's performance. SMA is the world's largest manufacturer of solar inverters and builds the most efficient, technologically advanced inverters available. When considering an inverter for your solar power system, SMA is the only logical choice.

**SMA Inverters: Ask for them by name.**

Visit us at Solar Power International  
October 12-14, 2010 | Booth #3827



**The Future of Solar Technology**







50

## On the Web

### Events Calendar

Search, browse, or post RE events:  
[www.homepower.com/events](http://www.homepower.com/events)

### Article Database

Search and browse a growing pool of more than 1,700 feature articles, columns, Q&As, and more in PDF. Unlimited download access is available to all HomePower.com members:  
[www.homepower.com/articles](http://www.homepower.com/articles)

### Back Issues

Access and download three years (18 issues) of back issues in PDF by becoming a HomePower.com member:  
[www.homepower.com/backissues](http://www.homepower.com/backissues)



### Find us on Facebook!

Easily browse and share our content with your Facebook friends. Enjoy special subscription offers, promotional discounts, reader comments, editors' notes, and much more:  
[facebook.com/homepower](http://facebook.com/homepower)



### Follow us on Twitter!

Watch for bite-size article teasers, renewable energy event information, sneak peeks at upcoming coverage, subscription specials, and topical retweets: [twitter.com/homepowermag](http://twitter.com/homepowermag)



### Share us everywhere!

Did you know that a large portion of HomePower.com's article database is public? If you see an inspiring article, share it via Facebook, Twitter, Digg, StumbleUpon, and many other services: [homepower.com/articles](http://homepower.com/articles)

## On the Cover

Joe Gamble with his family, son Forest and wife Suzanne Thompson, live in a geodesic dome, so their PV array couldn't be easily installed on the roof. Instead, they opted for a ground-mounted array (see page 50 for details).

Photo courtesy Joe Gamble



60



76

## Main Features

### 50 **ground** mounts

**Rebekah Hren**

Roofs aren't the only places for PV systems—ground-mounted systems offer their own unique advantages.

### 60 **battery** backup

**Flint Richter**

Would batteries benefit your grid-tied system?

### 66 **backup** sizing

**Flint Richter**

How to size a grid-tied PV system with battery backup.

### 76 **EV** revolution

**Bradley Berman**

Electric vehicles power forward and head for the mainstream.



66



## Up Front

### 8 from the crew

**Energizing innovations**  
*Home Power crew*

### 14 news & notes

**Bradley Berman**  
Hybrid cars going strong

### 18 on the road

Electric vehicle infrastructure

### 22 gear

**Justine Sanchez:** Siemens  
**Chuck Marken:** SunReports  
**Guy Marsden:** PowerCost

### 26 media

**Michael Welch**  
*Solar Basics* by Neil Kaminar

### 28 returns

**Kelly Davidson**  
Power to the People

### 32 solutions

**Cass Thurston**  
LED parking lot lighting

### 34 methods

**Erika Weliczko**  
PV array tilt adjustment

### 36 reader's DIY


**Martin Holladay**  
Testing antique PVs

### 38 mailbox

**Home Power readers**  
Feedback & forum

### 44 ask the experts

**RE industry professionals**  
Renewable energy Q & A

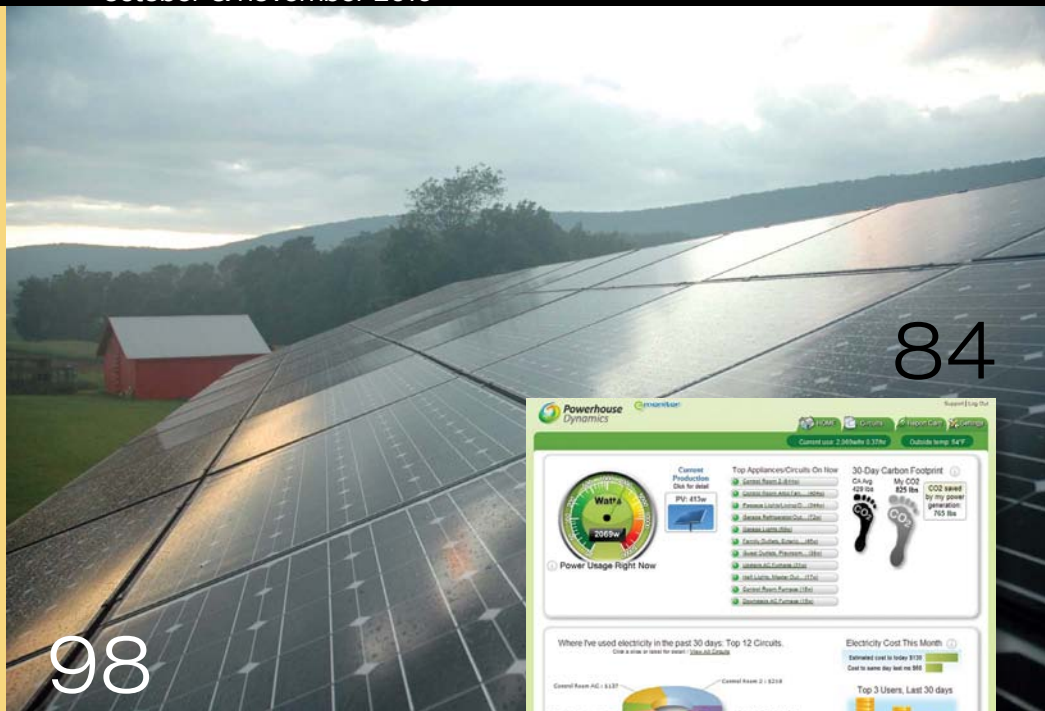

## More Features

### 84 PV monitoring

**Michael Brown**

High-tech monitoring solutions can help you get maximum performance from your PV system.

### 98 net-zero


**Kelly Davidson**

Q&A: Hear directly from the homeowner and his system designer on retrofitting a home for net-zero status.

### 108 insulation upgrade

**Fred Rogers**

Before winter hits, learn these insulation tips and how to measure the results of your energy upgrades.

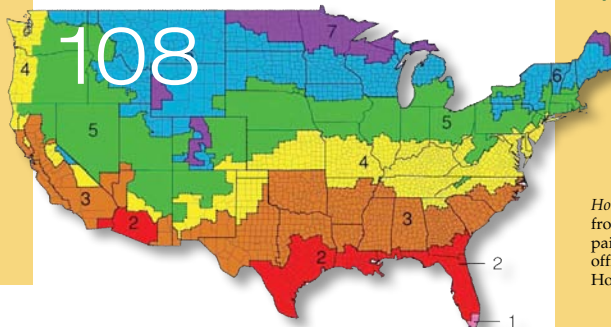

## In Back

### 118 code corner

**John Wiles**  
Getting ungrounded

### 122 home & heart

**Kathleen Jarschke-Schultz**  
Bear heat

### 127 advertisers index

### 128 back page basics

**Erika Weliczko**  
Charge controllers

*Home Power* (ISSN 1050-2416) is published bimonthly from offices in Phoenix, OR 97535. Periodicals postage paid at Ashland, OR, and at additional mailing offices. POSTMASTER: Send address corrections to *Home Power*, PO Box 520, Ashland, OR 97520.

# Energizing Innovations

*Home Power* is gearing up for the next industry show—Solar Power International in Los Angeles—and anticipating seeing the latest, greatest gear and catching the solar buzz on the conference floor.

Last year, PV module maximizers caught our attention. They help solar-electric systems in non-optimal installations get the most energy possible out of each PV module. Complete, packaged solar hot water systems also made an appearance, promising easier, less-costly installations with components that are designed to work together. New ground-mount racking options were showcased, some even obviating the post-hole digger and pouring concrete (see “Ground Mounts for PV Arrays” in this issue). And software solutions for monitoring both solar-electric and solar thermal systems were entering the limelight (see “Keeping Tabs on your PV System” in this issue).

So, what’s it going to be this year? Despite the gloomy forecast for the global economy, the sun is shining on renewables and the time is ripe for innovations. According to the Renewable Energy Policy Network for the 21st Century, the PV industry “has grown by 60% annually, wind by 27%, and solar hot water by 19%.”

Investments are driving the market and new developments will help expand it. And *Home Power* will be following the progress, providing coverage on what works, so you can make smart decisions about your future renewable energy systems and energy-efficiency upgrades.

—Claire Anderson, for the *Home Power* crew

## Get in Gear!

Find these articles and more at [HomePower.com](http://HomePower.com):

### Microinverters/Module Maximizers

- *The Circuit: Gear* (HP133)
- “PV Micromanaging” (HP129)
- “Distributed MPPT” (HP137)
- “Microinverters Make a Simple DIY Installation” (HP136)

### SHW Kits & Integrated Components

- *The Circuit: Gear* (HP135)
- “Solar Hot Water Storage: Residential Tanks with Integrated Heat Exchangers” (HP131)
- “Solar Hot Water Pump Stations” (HP134)



## Think About It...

*A PV module is the closest thing we have to perpetual motion  
 [and] is the most reliable electric generator in the known universe.*

—Joel Davidson, SOLutions in Solar Electricity



# Simplified Ordering. Installation. Battery Back-up.



Installers asked for a simplified battery back-up system that was easy to order and install. We answered with the FLEXpower line of fully pre-wired and factory tested inverter solutions, designed to save both time and money. The FLEXpower ONE incorporates a single Inverter/Charger for up to 3.6 kW of power, an 80 amp Charge Controller, a Battery Monitor and communication devices, while the FLEXpower TWO incorporates two Inverter/Chargers for up to 7.2 kW of power and additional options for both Charge Controllers and a FLEXnet DC monitoring device. Available in grid-tie and off-grid configurations, with both sealed and vented inverter models, the FLEXpower line is ideal for applications such as cabins, chalets, homes, remote communications sites and back-up power systems.

For available models and specs visit [www.outbackpower.com/flexpower](http://www.outbackpower.com/flexpower)

Corporate Office 360.435.6030 | Technical Support 360.618.4363



# Accredited Hands-on Workshops for PV & Solar Thermal Installations

ISPQ accredited classes which count toward NABCEP educational credit hours. Full classes schedule and information on-line now!

## Upcoming Classes

### Hudson, MA

#### Basic & Intermediate PV Design

- October 18-22

#### Advanced PV Design & Installation

- October 25-29

#### Solar Thermal Design & Installation

- October 4-8

### Columbus, OH

#### Basic & Intermediate PV Design

- November 15-19

### Costa Rica

#### Basic & Intermediate PV Design

- December 6-10



James Cormican  
Dave Compaan  
PV301, 302 & 303



# contact us

Home Power—Independently published since 1987

#### Publishers

Richard & Karen Perez

#### Executive Editor & CEO

Joe Schwartz

#### Managing Editor

Claire Anderson

#### Art Director

Ben Root

#### Senior Editors

Michael Welch, Ian Woofenden

#### Technical Editors

Justine Sanchez

Erika Weliczko

#### Associate Editor

Kelly Davidson

#### Graphic Artist

Dave Emrich

#### Building Technology Editor

Rachel Connor

#### Solar Thermal Editor

Chuck Marken

#### Transportation Editor

Bradley Berman

#### Columnists

Kathleen Jarschke-Schultze

John Wiles

#### Advertising Manager

Connie Said

#### Advertising Director

Kim Bowker

#### Chief Information Officer

Rick Germany

#### Operations Director

Scott Russell

#### Data Manager

Doug Puffer

#### Customer Service & Fulfillment

Jacie Gray, Shannon Ryan

Home Power magazine • PO Box 520 • Ashland, Oregon 97520 • USA



homepower.com



facebook.com/homepower



twitter.com/homepowermag

## Subscriptions

To subscribe, renew, change, or inquire about a subscription:

800-707-6585 or 541-512-0201

subscription@homepower.com

www.homepower.com/subscribe

## Back Issues

Many of our back issues are available in print and/or online in Adobe PDF. Our first 131 issues are also compiled on DVD-ROM. More information at:

www.homepower.com

Order online or by phone:

800-707-6585 or 541-512-0201

## Submissions

For inquiries and information related to editorial submissions, write to us at:

submissions@homepower.com

www.homepower.com/writing

## Marketing

Promotional opportunities and offers:

marketing@homepower.com

## Ask the Experts

To have your technical questions considered for publication, send them to:

asktheexperts@homepower.com

## Web Site

www.homepower.com

Send your comments and suggestions regarding the site to:

web@homepower.com

## Advertising

For inquiries and information related to advertising in Home Power or on www.homepower.com, contact:

connie.said@homepower.com

541-512-0201

kim.bowker@homepower.com

541-858-1791

www.homepower.com/advertising

## Letters to the Editor

E-mail your comments and suggestions to us at:

mailbox@homepower.com

or write to the address above.



altEstore.com/classes • 888.218.0644

©2010 Home Power Inc. All rights reserved. Contents may not be reprinted or otherwise reproduced without written permission. While Home Power magazine strives to publish only safe and accurate content, we assume no responsibility or liability for the use of this information.

Interior paper is made from 85%–100% recycled material, including 20%–30% postconsumer waste.

home power 139 • october & november 2010



we **sell** it, we **teach** it, we **live** it  
and love it!



**Xantrex GT Grid-tie  
Solar Inverters**  
starting at: **\$1,756**



**Morningstar SunSaver  
MPPT Charge Controllers**  
**\$233**



**Evergreen  
215W Solar Modules**  
**\$675**



**Kyocera  
135W Solar Modules**  
starting at: **\$387**



**Magnum Energy MS-PAE  
Series Inverter/Chargers**  
**\$2,160**



**Deka/MK Battery Sealed  
Deep Cycle Batteries**  
starting at: **\$96**



**Blue Sky MPPT Solar  
Charge Controllers**  
starting at: **\$178**



**Air X Wind Turbine**  
starting at: **\$699**



**Dankoff Solar Slowpumps**  
starting at: **\$468**



**Michael and family are  
making it do-able, are you?**

altE customer Michael and his family  
enjoy a 4.5 kW Photovoltaic system and  
a solar hot water system made up of five  
collectors on their Connecticut home.

Read Michael's story online at:  
[altestore.com/stories](http://altestore.com/stories)



*making renewable do-able™  
for over 10 years!*

**AltE® Store** is the Do-It-Yourselfer's supplier of renewable energy goods. We provide you the products, tools, education, expertise and the technical service you need to safely and successfully put together your own system. Join our fun and enthusiastic community of DIY'ers today!

Call us at **800.320.9458** or **978.562.5858**  
or visit us online at **[www.altEstore.com/HP139](http://www.altEstore.com/HP139)**

Get an  
**Extra Discount!**  
Mention this code:  
**HP139**  
when you order  
today!



# They See a Roof. You See an Obstacle Course.



## Measure

Solmetric  
SunEye®



Quick, accurate shade measurements with the touch of a button.

The new SunEye 210 incorporates one-handed operation, live preview mode, target mode for dealing with compass interference from metal roofs, integrated pitch measurements, and optional integrated GPS.

## Design

Solmetric  
PV Designer™



Transfer the data to your PC and use Solmetric PV Designer to design the most effective solar array. Draw the roof, identify locations of SunEye readings, lay out modules, and perform string sizing.

## Solar Made Simple

With Solmetric® solutions you get maximum sun with minimum headache. Expert tools let you measure the site, design the system, and get the job done right.

**Generate winning quotes and designs that take you from rooftop to desktop and back again.**

## Expert Tools. Better Solar.

Solmetric SunEye 210 and PV Designer are available now at [www.solmetric.com](http://www.solmetric.com)


With PV Designer you can compare the estimated energy production in multiple what-if design scenarios.





**Save time and money  
with the most revolutionary  
PV mounting system  
in the world!**

**CLICKSYS™**

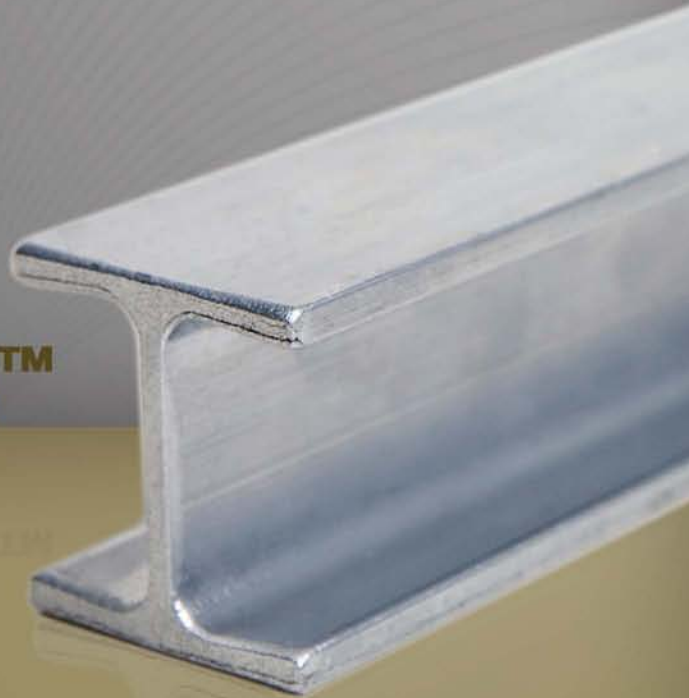

**Incomparable Value.**


The new innovative design of CLICKSYS offers the most cost effective flush mount solution in the residential marketplace. Pricing starts as low as 10 cents per watt.

**Faster, More Flexible Attachments.**

"Click and secure" connections eliminate bolts and nuts, saving an estimated 40 percent in labor over competitive mounting systems.

**In Stock and Ready to Ship.**

CLICKSYS is conveniently available nationwide from Unirac's network. Visit [www.clicksys-beam.com](http://www.clicksys-beam.com) to find a distributor near you.

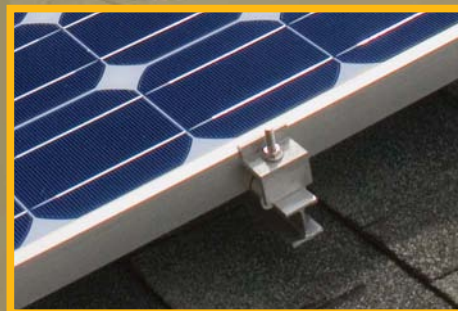

[www.clicksys-beam.com](http://www.clicksys-beam.com)

# Brightest Days Ahead for Hybrid Gas-Electric Cars

To paraphrase Mark Twain, recent reports of the death of hybrid cars have been greatly exaggerated.

In the past few months, the reliability and safety of cars that use both a gas engine and an electric motor have been called into question. If you believe the headlines, you'd think that hybrids are running out of gas (and electrons). But a study of product plans from major car makers reveals that hybrids are just getting started.

The worst of the anti-hybrid press took place in March, when a San Diego, California, man claimed that his Toyota Prius sped up and couldn't be stopped. After a harrowing 23 minutes—recounted in detail by major national media outlets—a highway patrolman coached the man to safety by having him simultaneously apply the parking brake and foot brake. Investigations by Toyota, the National Highway Traffic Safety Administration, and even NASA, failed to produce any explanations. No matter. The incident struck fear into the public's hearts and, along with Toyota's other safety publicity, undermined the once-spotless reputation of these hybrids as the most reliable and fuel-efficient cars on the road.

Hybrids have also come under attack from the other side of the gas-electric divide. At least one auto reviewer sees hybrids as dead in the water now that a new age of electric cars is upon us. In late April, Warren Brown of *The Washington Post* wrote, "Hybrids are merely a way-station until we get proper electric cars and infrastructure.... The Prius's dominance seems to be almost over." Indeed, fans of pure electric cars have a lot to be happy about these days with the Nissan Leaf, Ford Focus Electric, Coda Electric Sedan, Mitsubishi i-MiEV, and other EVs scheduled to arrive this year (see "The EV Revolution," this issue). But electric devotees eager to dance on the grave of any vehicle with an internal combustion engine might have to wait a bit longer.

Most forecasters believe that relatively affordable gas-powered engines—especially ones employing strategies like direct injection and turbocharging—will become increasingly efficient and will be a long-term winner when

it comes to the economics of saving fuel. Of course, these downsized gas engines can be combined with an electric motor and a battery pack to turn them into hybrids—and boost efficiency even more.

In fact, tougher fuel economy regulations requiring automakers to reach an average of 35.5 mpg by 2016 will practically legislate more hybrids. In the next five years, the number of hybrids—both the ones that can plug in and the ones that can't—will grow from 25 to perhaps 60 or 70 models.

## What should we expect?

- Toyota plans to double hybrid production in 2011, and will introduce an entire family of Prius cars in the next few years. Their plans reportedly include a subcompact Prius, a Prius plug-in hybrid, and a hybrid minivan.
- Ford's electrification strategy includes the all-electric Ford Focus and Transit Connect, but also the Ford MKZ hybrid (due later this year), a plug-in hybrid Ford Escape, and a pair of next-generation hybrids by 2013. The company is also crossing the pond with a set of hybrids and plug-in hybrids for Europe.
- Hyundai will introduce its first hybrid, the Sonata hybrid, and says that it's working on a new hybrid to compete against the Prius.



Courtesy Ford Motor Company



- Honda is re-investing and re-engineering its future hybrids in a quest to take the lead on fuel economy. It will introduce the small and sporty CR-Z hybrid coupe this summer, and use the technology on a hybrid minivan and in its Acura luxury division.
- General Motors is on track to introduce its Chevy Volt, a plug-in hybrid, late this year and will follow with a plug-in hybrid crossover SUV. GM executives continue to assert that mild hybrid technology is a critical strategy for making future hybrids affordable.
- It's rumored that Mercedes is planning to convert its entire S-class to hybrid technology in the next few years.
- Nissan stands alone in its belief that pure electric cars are a single-point solution. Yet, its luxury division unveiled the Infiniti M35, its first hybrid, at the 2010 Geneva Motor Show. UK's *Autocar* reported that all Infinitis will be hybrids within 10 years.

Connect these dots to get a hybrid-rich picture of the road in 2013 or 2014: a 50-mpg Prius next to a 50-mpg Honda, next to a 50-mpg Hyundai, next to a 90-mpg Prius plug-in hybrid, next to the plug-in hybrid Chevy Volt...

—Bradley Berman



Courtesy Infiniti

## MEET SOLAR'S SLEEK NEW LOOK



**S**napNrack PV Mounting systems make solar owners and installers happier. Here's how:

- **Owners** see a clean finish — no protruding rails, exposed wires or rough edges.
- **Installers** use one wrench, a no-ties wire management system, and no-drilling snap-in channel nuts to make installations fast, secure and cost-effective.

Contact us today to find out how you can get the strongest, most attractive racking system available anywhere.

**SnapNrack™**  
PV Mounting System

[www.snapnrack.com](http://www.snapnrack.com)  
[info@snapnrack.com](mailto:info@snapnrack.com)

SnapNrack systems work for both roof and ground mounts and with all leading PV module brands.

## ENPHASE MICROINVERTER SYSTEM

Productive | Reliable | Smart | Safe

“We build systems that maximize energy harvest. That's why we use Enphase.”

**Mike Hall**

Chief Executive Officer  
Borrego Solar







# ***All The Power You Need Under One Umbrella***

QUALITY SYSTEM  
CERTIFIED TO  
**ISO 9001**  
**ISO/TS 16949**  
**ISO 14001**

***Whatever your application,  
you can depend on Deka Solar.***

Deka Solar Gel/AGM or Flooded batteries are the proven choice for all your renewable energy applications. Deka Solar Batteries, sold worldwide through major photovoltaic equipment manufacturers and distributors, exceed the high standards of the solar industry with superior quality and environmentally conscious battery solutions. Available from MK Battery Distribution centers across North America, Europe and the Asia Pacific region.

PROVEN PRODUCTS IN DEMANDING PHOTOVOLTAIC APPLICATIONS • U.L. RECOGNIZED COMPONENTS • COMPETITIVE WARRANTY • MADE IN THE U.S.A.

**Deka**  
**SOLAR**  
PHOTOVOLTAIC BATTERIES

**MK**  
POWERED

**MK Battery • [www.mkbattery.com](http://www.mkbattery.com)**

A subsidiary of East Penn Manufacturing Co., Inc.

**W**ith GM's Volt, Nissan's Leaf, and other electric vehicles expected on the market in the coming months, the race is on to develop the charging infrastructure to support America's growing fleet of plug-in vehicles.

Federal stimulus grants are paving the way for the installation of more than 16,000 recharging stations nationwide—many of which are being made possible through the ChargePoint America program and The EV Project. We've mapped out the hot zones.

# Plug-In

Washington, Oregon, California, and British Columbia drive forward with plans for the "West Coast Green Highway"—a border-to-border network of EV charging stations along Interstate 5, from B.C. to Baja.

Washington lays the nation's first stretch of "Electric Highway"—EV recharging stations spaced every 40 to 60 miles along Interstate 5. The first charging stations—located north of Everett and south of Centralia—will be activated this fall, with the remaining up and running by summer 2011.

Portland City Council gives the green light for EV-friendly policies, including streamlined permitting for chargers and designated charger-equipped parking.

ClipperCreek Inc. of Auburn, California, will upgrade 630 existing charging stations throughout the state.

An EV charging station in Palo Alto becomes the first public-use station in California that is part of the ChargePoint America program.

\$3.4 million from the California Energy Commission, along with federal grants and other matching funds, fuel the installation of 1,600 charging stations in Los Angeles, Sacramento, and the San Francisco Bay Area.

Arizona-based eTec, a unit of ECOTotality Inc., will install 2,550 charging stations in Southern California, mostly in the San Diego area.

## The EV Project

Nissan North American and General Motors/Chevrolet are partnering with ECOTotality North America on "The EV Project"—a U.S. DOE program that rolled out in major cities starting October 2009. The \$230 million program, funded in part by a \$99 million grant from the DOE, aims to deploy nearly 15,000 public and private charging stations in 16 cities ([www.theEVproject.com](http://www.theEVproject.com)).

### Participating Cities

- |                   |                   |
|-------------------|-------------------|
| ● Phoenix, AZ     | ● Salem, OR       |
| ● Tucson, AZ      | ● Chattanooga, TN |
| ● Los Angeles, CA | ● Knoxville, TN   |
| ● San Diego, CA   | ● Nashville, TN   |
| ● Washington, DC  | ● Dallas, TX      |
| ● Corvallis, OR   | ● Fort Worth, TX  |
| ● Eugene, OR      | ● Houston, TX     |
| ● Portland, OR    | ● Seattle, WA     |

States offering incentives

States planning to offer incentives



# America

## Federal

In Congress, the Electric Drive Vehicle Deployment Act of 2010 gains momentum. If passed, the bipartisan initiative would foster the widespread adoption of electric vehicles and infrastructure by supporting comprehensive programs to deploy up to 700,000 EVs over the next six years, as well as by extending and enhancing tax credits for consumers who purchase EVs or plug-in hybrids.

New York City's mayor Michael Bloomberg plugs in a Smart Car to the city's first charging station—at 451 9th Avenue in Manhattan. One hundred similar charging stations will be installed throughout the city by September 2011.

From its Snowmass, Colorado, headquarters, Rocky Mountain Institute leads Project Get Ready, a nonprofit initiative helping North American cities prepare for plug-in electric vehicles.  
[www.projectgetready.org](http://www.projectgetready.org)

A statewide network of 350 public charging stations—including 200 within "The Triangle" of Chapel Hill, Raleigh, and Durham—will be coming to North Carolina by late 2012.

Baltimore Electric Vehicle Initiative will install 55 charging stations along Interstate 95 and throughout the state, including sites in Cecil, Harford, Baltimore, Anne Arundel, Prince George's, Montgomery, Charles, and Frederick counties.

The city of Baltimore and Baltimore Gas & Electric will install 9 to 16 charging stations in parking garages around town.

Charlotte-based Duke Energy will install about 100 charging stations in its N.C. service territory, mainly in the Charlotte area, by summer 2011.

AeroVironment Inc. is slated to build as many as 100 charging stations in seven South Carolina cities as part of a contract with Plug-In Carolina, a nonprofit program sponsored by the state's major utilities. Stations should be operational by December 1.

The sunshine state kicks off its ChargePoint America program with an EV charging station at Orlando City Hall Plaza. Orange County will add 300 to 500 stations by 2012.

## ChargePoint

Ford, Chevrolet, and SmartUSA recently teamed up with California-based Coulomb Technologies for ChargePoint America—a \$37 million program partially funded by a \$15 million U.S. Department of Energy grant. The program's goal is to install more than 4,600 public and private EV charging stations in nine metropolitan regions. About 1,000 public charging stations should be ready by the end of 2010, with the remaining activated by September 2011.  
[www.chargepointamerica.com](http://www.chargepointamerica.com)

### Participating Cities

- Bellevue-Redmond, WA
- Sacramento, CA
- San Jose/San Francisco Bay Area
- Los Angeles, CA
- Austin, TX
- Detroit, MI
- New York City, NY
- Washington, DC
- Orlando, FL

*Will YOUR SOLAR SYSTEM  
be working when she  
GOES TO  
COLLEGE?*



North American Board of  
**NABCEP**  
Certified Energy Practitioners®

***Make Sure it Will.***

*Insist on a NABCEP Certified Solar Installer.*

"Our PV system was a big investment in the future and I wanted it installed by a professional with national credentials to make sure it was installed properly. The NABCEP Certified installer did just that, and the system is operating flawlessly providing our family now with free renewable power."

Mike Burnetter, Home Owner and Professional Engineer



Come visit us at Booth #1330 and find a NABCEP Certified installer near you at

**[www.nabcep.org](http://www.nabcep.org)**



→ aleo modules? incomparable!



aleo is No. 1 with German consumer reports\*



\* based on German consumer reporting organizations Stiftung Warentest, May 2006 and Öko-Test, April 2010

**Don't compare apples to oranges:** our solar modules are known for especially high power production. Real-world tests have shown that aleo's premium modules perform better than other branded modules. In addition to our 25-year power guarantee, we provide an industry-leading 10-year product guarantee, ensuring safe and reliable operation. We provide complete systems and support our partners with services ranging from system design to marketing. Customers of 2 million aleo modules know: aleo is incomparable.

**aleo solar North America Inc.**

T +1 (866) 411-ALEO | [info@aleo-solar.com](mailto:info@aleo-solar.com) | [www.aleo-solar.com](http://www.aleo-solar.com)

**aleo**

# Siemens Industry 600 VDC Disconnect

In June, Siemens Industry ([www.sea.siemens.com](http://www.sea.siemens.com)) released its Type VBII 600 VDC solar safety switch (\$530 to \$2,284), UL listed to disconnect three separate PV input strings. It is available in 30-, 60-, and 100-amp fusible and non-fusible versions, for indoor (Type 1) and outdoor (Type 3R) use. The switch has a factory-installed ground bar, and comes with the *National Electrical Code* (Article 690.17) required warning label. This product is built for the grid-tied PV DC disconnect niche, which has been commonly filled by the Square D HU series safety switches, but is not made to work with positive-grounded PV arrays. (Square D safety switches are self-certified—but not UL-certified—to disconnect up to three input strings.)

—Justine Sanchez

Courtesy Siemens Industry



## CORRUGATED STAINLESS STEEL TUBE **EASYFLEX**® Solar Line System



### Installation




888-577-8999 / 714-258-2600  
[www.easyflexusa.com](http://www.easyflexusa.com)





# SunReports Apollo 1 PV & SHW Systems Monitoring

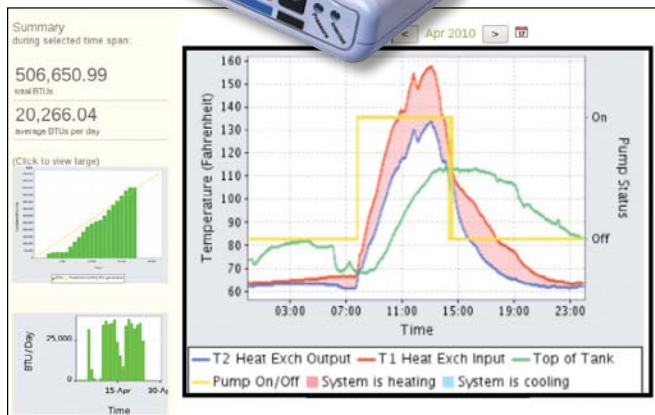

Courtesy SunReport (2)

Interested in monitoring the performance of your PV and thermal systems (SHW or pool heating) with the same device? Then check out SunReport's Apollo 1 ([www.sunreports.com](http://www.sunreports.com)). The monitor uses your Internet connection and results can be accessed by any Web browser. For thermal systems, temperature sensors monitor system performance and current transducers detect when the pump is energized. Easy setup features include inverter detection, current transducers, and Internet connections. Plus, the wiring is color-coded. No Internet configurations are needed after correct component installation and wiring.

Apollo 1's thermal monitoring requires an estimated flow rate; this will rarely be as accurate as a Btu meter working with an inline flow meter, but it's the next best solution. For more information on SunReport's PV system monitoring, see "High-Tech Solutions for Keeping Tabs on Your PV System" in this issue.

—Chuck Marken

SolarEdge offers the first end-to-end Distributed Power Harvesting system complete with module-embedded DC power optimizers, specialized DC-AC inverters, module-level monitoring capabilities for accurate troubleshooting, and automatic safety mechanisms. The result: a new definition of what cost-efficient, grid-ready energy is all about.

- Module-embedded PowerBox enabling optimized MPPT
- Module-level monitoring for precise, remote troubleshooting
- Automatic DC voltage shutdown during installation, maintenance and firefighting
- 97%+ weighted efficiency inverters specifically designed for power optimizers
- Significant cost-efficiency, including savings on wiring, DC disconnects & fuses, and built-in communication HW
- Optimal fixed string voltage, regardless of temperature or string length, enables constraint-free design
- Simple and easy installation for residential, commercial and large field deployments

Visit us at Solar Power International,  
October 12-14, Los Angeles, California,  
booth 4319



[www.solaredge.com](http://www.solaredge.com)



**solaredge**  
architects of energy™

# POWER REDEFINED

# PowerCost Monitor Goes WiFi

Plus Microsoft's Hohm Web Portal



CourtesyBlue Line Innovations

Blue Line Innovations ([www.bluelineinnovations.com](http://www.bluelineinnovations.com)) released its PowerCost Monitor (full kit, \$268), a new energy monitor that couples with Google's free PowerMeter Web portal ([www.google.com/powermeter](http://www.google.com/powermeter)), entering the market alongside the TED 5000 energy monitor ([www.theenergydetective.com](http://www.theenergydetective.com)). The PowerCost Monitor straps around your utility kWh meter, reading the meter wheel optically. (It also works with digital meters.) Opening the breaker box is not required. Data is sent by Bluetooth to a gateway and your Internet router, which sends it to the Microsoft Hohm free Web portal ([www.microsoft-hohm.com](http://www.microsoft-hohm.com)). The Hohm portal helps consumers with energy-saving tips, tracks your energy usage and compares it to historical patterns. Plus, you can learn how others have saved money and energy—including your neighbors. Users enter data about their home and energy usage, and Hohm then offers efficiency recommendations. The monitor currently has no provision for reporting grid-tied renewable energy generated or exported, unlike the TED/PowerMeter system.

—Guy Marsden

**S-5!®**  
The Right Way!

THERE IS A REASON WHY THE INDUSTRY INNOVATOR IS ALSO THE MARKET LEADER!

When it comes to mounting framed PV modules directly to standing seam metal roofs there really is only one way!

**Rail or DirectAttached™**  
S-5!® mounting solutions result in dramatically reduced costs.

The quickest way!  
The easiest way!  
The right way!

Mounting hardware as low as **\$.06 per watt\***.

**LMCURBS®** 

See us at  
Solar Power  
Booth #3642

\*To learn how visit  
[www.S-5-solar.com/hp](http://www.S-5-solar.com/hp)  
call 1-888-825-3432.

[www.lmcuibs.com](http://www.lmcuibs.com)  
800-284-1412



# Residential Made Easy



Time is money and Solectria Renewables can save you both on your next installation. Our factory-built integrated panel assemblies come complete with inverter(s), AC/DC disconnects, meter and web-based monitoring if required. They are easy to install and easy to order, giving you the competitive edge.

For complete options and specifications, visit our website [www.solren.com](http://www.solren.com) or any of our value added distributors.





Grid-Tied inverters, kW-MW

[inverters@solren.com](mailto:inverters@solren.com)

[www.solren.com](http://www.solren.com)

Boston - 978.683.9700

# Solar Basics by Neil Kaminar

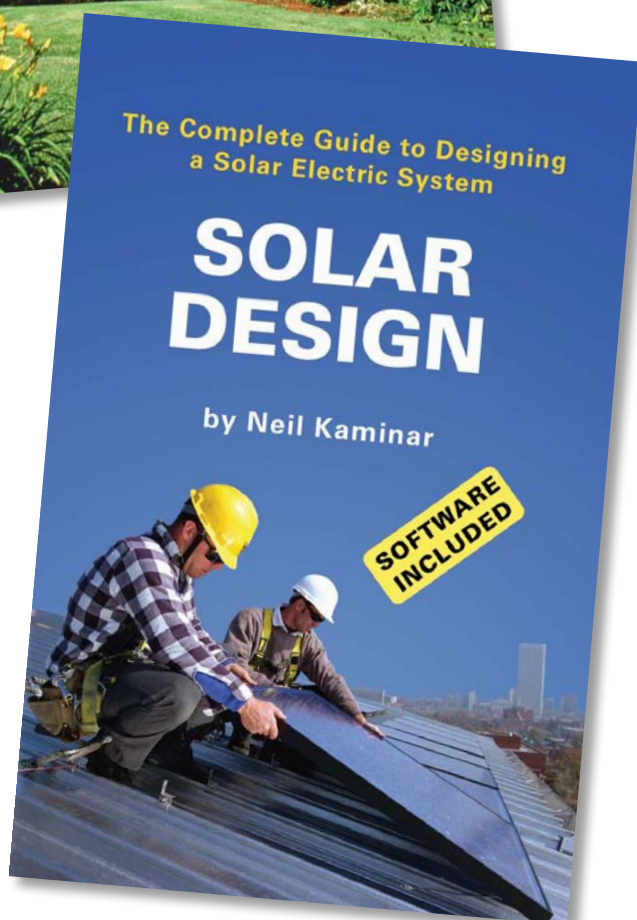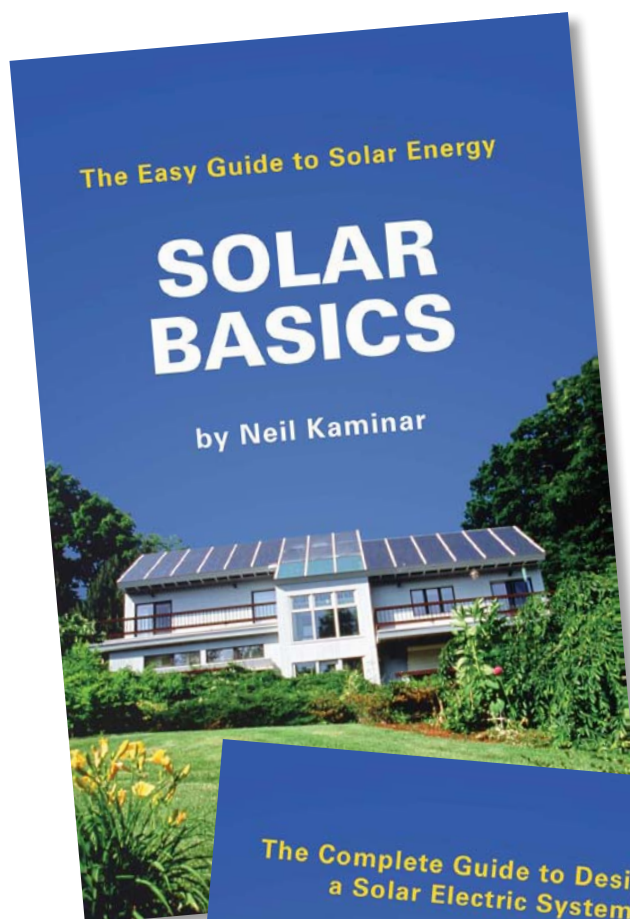

Over the years, lots of books about PV systems have come to *Home Power's* mailbox. Many have lacked either completeness or were so far over the heads of the intended reader's level as to be difficult to wade through.

But for folks who are just getting their renewable energy start, Neil Kaminar's new *Solar Basics* (McNeill Hill Publications, 2009) explains solar electricity in simple terms. While most books on the subject require a leap of faith that questions during the reading will eventually be answered, this book's organization does a pretty good job of sequencing the information. My only beef with it is that sometimes terminology is used that is not well standardized in the industry, such as using the word "panel" to describe an array of PV modules.

The book is nicely illustrated with photographs and tables, and covers:

- How solar modules and solar cells work
- PV applications
- Batteries, inverters, charge controllers, and more
- Solar water systems
- How to find funding
  - How to buy modules and other equipment
  - The basic steps in sizing a system
  - How to figure costs
  - System installation, testing, and maintenance
  - Safety

Kaminar has been in the solar industry since the early 1970s, and his credentials include early solar engineering, as well as PV module development and manufacturing. But those lofty credentials have not gotten in the way of his communication capabilities, and RE newbies should find the book very helpful.

Kaminar has also published *Solar Design* (ISBN 978-0-9840510-1-4), intended to take would-be professionals and dedicated DIY readers of *Solar Basics* to the next level, offering details on system sizing, component choices, and other subjects important to system design. *Solar Design* includes a CD-ROM disk of software and spreadsheets helpful in designing PV systems. Both books are available at [www.thesolardesignbook.com](http://www.thesolardesignbook.com).

—reviewed by Michael Welch



# Good for the planet

## Good for your wallet

"There's always a better alternative. Shine, baby, shine!"

- Larry Hagman



TEST WINNER



No. 1

PHOTON MODULE TEST  
2008 AND 2009

Independent Photon magazine confirms: SolarWorld® modules maximise energy yield. The SolarWorld® module ranks first among 16 tested modules.

Putting a solar electric system on your roof is like getting paid to reduce your carbon footprint. And with Sunkits® from SolarWorld, America's largest solar panel manufacturer, it's never been easier or more affordable. Call SolarWorld at **1-800-94-SOLAR** or visit our website today to schedule a free estimate.

[www.solarworld-usa.com](http://www.solarworld-usa.com)



**We turn sunlight into power.**

# Small Changes, Big Success

After graduating with her MBA from Northeastern University, Jenean Smith began climbing the corporate ladder, working her way up to a management position at a dot-com company in San Francisco.

Even though she had made it close “to the top,” Smith says, “I just couldn’t shake this hollow feeling, like I was missing something.” So she decided to figure out just what that was. A year later, after applying to the Peace Corps, she was living in the rural community of San Lorenzo, Nicaragua.

“The experience made me realize that I could do a lot of good as an individual. I didn’t need to work with an NGO or a government project. I just needed to set a goal and work at it,” she adds.

Her time in Nicaragua convinced her that one person can make a difference. “I joined the Peace Corps thinking I needed a structured program and lots of support to have any real impact on people’s lives, and while I have tremendous respect for the program, I was surprised by how little help I was given,” Smith says.

Smith’s latest endeavor is Power to the People (PTTP), a nonprofit organization that works with communities in rural Nicaragua to install solar-electric systems on community buildings, such as schools, health-care centers, libraries, and orphanages.

Having relied upon kerosene lamps for lighting while living in Nicaragua and Honduras, Smith learned firsthand of kerosene’s problems—its high cost, unhealthy fumes, and flammability hazards. Recognizing the need for a clean, renewable source of



**Above:** A Las Cuchillas community volunteer cuts the EZ mount rack for the battery-based PV system.

**Below:** Schoolgirls in front of the 680 W PV system on the school in Las Cuchillas, Nicaragua.



Courtesy: Power to the People (2)



electricity in rural communities, PTPP started with the mission of raising enough money to install a 1 kW PV system on the roof of a public school in El Pedregal, Nicaragua.

Although Smith didn't have the technical expertise to install PV systems on her own, she leveraged what she did have—marketing savvy. Upon her return to the States, she solicited donations from businesses and organized fundraising activities—silent auctions, concerts, and even “green” speed-dating events, where “eco-conscious” people donated \$25 for the opportunity to meet other like-minded folk.

She assembled a team of volunteers, calling on members of a renewable energy discussion group that she hosted when living in Los Angeles. Before long, she had convinced an energy consultant, a city planner, a solar engineer, and a host of other talented individuals to donate their time and resources to the cause. The group raised funds to cover the project's cost, including the expenses for a six-person volunteer crew to travel to the site and install the off-grid, battery-based system.

In March of 2009, the school's system was installed. “The PV system not only brought light to the small community,” says Smith, “but it also provided a place to hold community meetings and night classes for adults. It made it possible for people of all ages to attend televised distance learning classes, and it created income for the school by selling electricity to charge cell phones.”

Since then, PTPP has raised more than \$75,000 and solicited nearly \$25,000 in equipment donations. The group also stepped up its fundraising efforts with a “voluntourism” program, in which people pay for the opportunity to travel to Nicaragua and work on a PTPP project.


In April 2010, the group completed its second project in Las Cuchillas, Nicaragua—a 680 W PV system for a rural, two-room school and a 225 W PV-powered battery charging station at a small library.

Next up is an installation in the central Nicaraguan community of Las Lajas—a 1.4 kW PV system and a 450 W PV battery charging station at the elementary school, and a 340 W PV system at the health care center. Future projects include an ambitious plan to power an entire town in Nicaragua with a batteryless PV system.

—Kelly Davidson

## web extra

To learn more about PTPP and how you can help, visit [powertothepeople.org](http://powertothepeople.org).

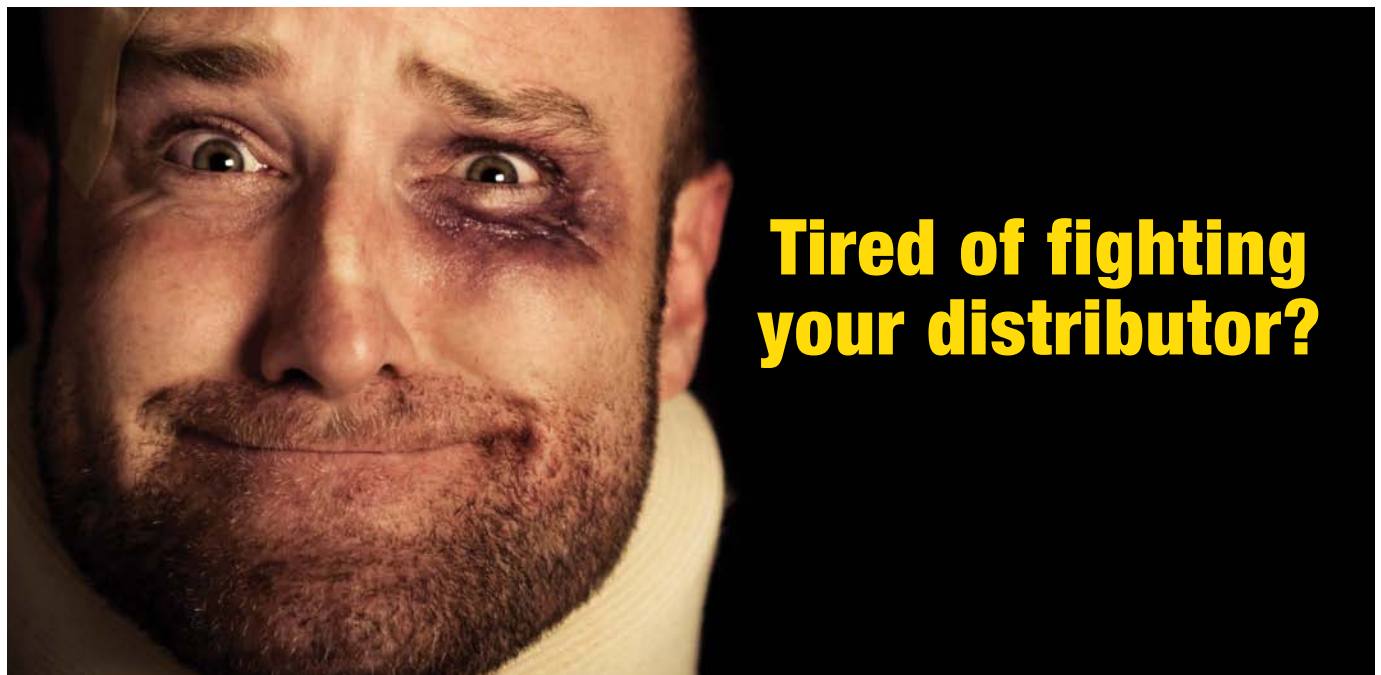

North America's Premier Distributor of ET Solar Modules.



800-578-0418 • [www.ussoldistributing.com](http://www.ussoldistributing.com)



Visit us at Booth 3328

# WHEN THE SUN SETS SUN XTENDER SHINES

Sun Xtender® batteries are manufactured by Concorde® Battery Corporation, the Largest Supplier of Sealed Lead Acid Batteries to Aircraft and Helicopter Manufacturers Worldwide. Sun Xtender batteries are constructed to the same premium quality standards as the aircraft battery line with the absorbent glass mat (AGM) design adopted by the military.

Sun Xtender's advantages include a unique high density plate technology and PolyGuard™ separators for superior reliability, power and extended life. PolyGuard™ separators are used around the positive plate and AGM to prevent shorting from shock and vibration. No other manufacturer provides this extra layer of protection.



« PVX-12150HT  
2Volt, L-16 1215 Ah



« PVX-2240T  
6Volt, GC2 224 Ah

• PVX-1530T »  
12Volt, 30H (Tall) 153 Ah

## DEEP CYCLE POWER FOR RENEWABLE ENERGY SYSTEMS

Sun Xtender's low impedance design facilitates excellent charge acceptance. There is no current limit with controlled voltage charging. Recharge is quick and complete in a minimum of time. Pure lead calcium plates are thicker than the industry standard for longer cycle life, increased reliability and power.

## CORROSION FREE TERMINALS, NO EXPOSED LEAD, NO SPILLAGE, MAINTENANCE FREE

Silicon bronze alloy terminals eliminate corrosion and lead exposure while providing maximum conductivity. Sun Xtender's valve regulated lead acid (VRLA) and recombinant gas design prevents electrolyte spillage, leaking and spewing. The gases formed when the battery is charged recombine to reform water — replenishment of water is never required. This Maintenance Free design allows the option to install batteries upright, on their side, or on end.


*Sun Xtender batteries ship HAZMAT  
EXEMPT via land, sea or air!*

...the heart of your solar system®  
**SUN XTENDER**  
MANUFACTURED BY CONCORDE BATTERY CORPORATION  
Crafted for Quality in the U.S.A.

2009 San Bernardino Road, West Covina, CA 91790 USA | PHONE 626-813-1234 | [www.sunxtenderbattery.com](http://www.sunxtenderbattery.com)

Manufactured under ISO 9001:2000 & AS9100B certification



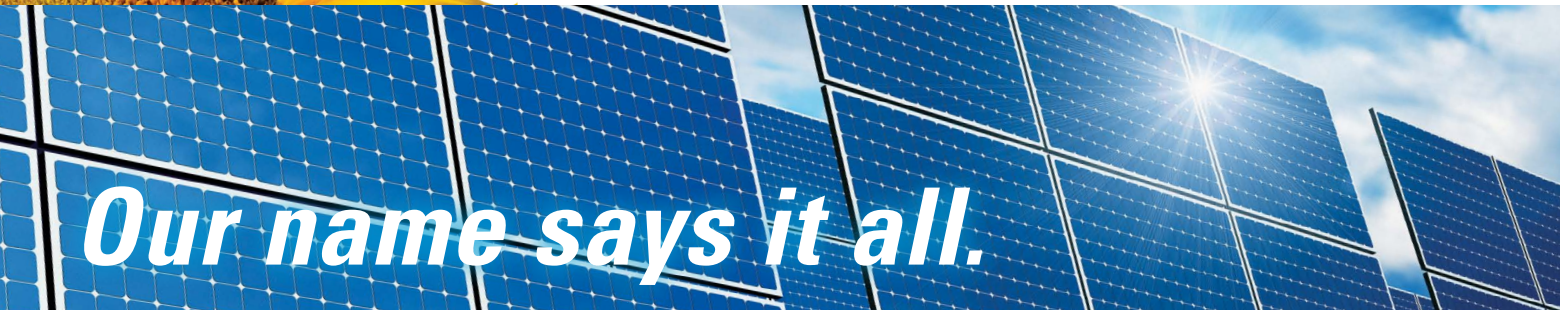

# Our name says it all.

## DESIGN


- NABCEP Certificate of Knowledge
- 1,800+ products online
- Line Drawing Services
- Engineering Services
- Installation Support
- Off-Grid & Grid-Tie

## SOLAR PANELS

**SCHOTT solar**

**SCHOTT SOLAR  
230 Watt Panel**

**\$2.47/Watt**  
\$568.10 ea  
(pallet pricing)



**YINGLI SOLAR**

**YINGLI SOLAR  
225 Watt Panel**


**\$2.30/Watt**  
\$517.50 ea  
(pallet pricing)



**CONERGY**

**CONERGY  
225 Watt Panel**

**\$2.55/Watt**  
\$573.75 ea  
(pallet pricing)



## EXPERIENCE

- Installation Experience from 1kW to 1MW
- EE-98 & GB-98 Licenses
- Authors of *Complete Idiots Guide to Solar Power for your Home*

## SERVICE

- 96% of calls answered within 3 rings
- 95% of orders ship within 48 hours

## INVERTERS

**[e] ENPHASE**

**ENPHASE  
Micro-Inverters**

**M210-84-240-S12**  
for MC3 connection  
**\$232 \$1.10/Watt**

**M190-72-240-S12**  
for MC4 connection  
**\$197 \$1.04/Watt**

**M190-72-240-S13**  
for Schott Panels  
**\$197 \$1.04/Watt**



**Fronius**

**FRONIUS  
Inverters**

**7.5 IG Plus**  
7500 Watt Inverter  
**\$5,099 \$0.68/Watt**

**IG Plus 6.0**  
6000 Watt Inverter  
**\$4,409 \$0.73/Watt**

**IG Plus 3.8**  
3800 Watt Inverter  
**\$3,053 \$0.80/Watt**



**SMA**

**SMA  
Inverters**

**SB 8000US**  
8000 Watt Inverter  
**\$4,393 \$0.55/Watt**

**SB 5000US**  
5000 Watt Inverter  
**\$3,239 \$0.65/Watt**

**SB 3000US**  
3000 Watt Inverter  
**\$1,999 \$0.67/Watt**



## KITS

Pre-Engineered Kits  
1 to 100kW

## MOUNTING

SolarMount Rail 106"	\$61
SolarMount Rail PRO-PAK x8, 106"	\$457
L-feet Clear, x20	\$81
Tilt Leg 30" Low Profile	\$43
Top Mount End, Mid Clamps x20	\$41



## GRID TIE KITS

**ASG-SCHOTT  
5.4kW  
Kit  
ARRA  
APPROVED**

**\$18,122**



Learn and buy online at  
**affordable-solar.com**, or call:

**1.888.736.5792**

**7am – 6pm MST**

2501 Yale Blvd SE | Albuquerque, NM 87106 | USA

Meet Aaron.  
**Brewmeister. Grid-tie guru.**  
(Knows not to mix the two.)

Physicist, beerologist, and walking NEC code reference, Aaron is our go-to guy on grid-tie. Need a formula for a good ale or a knowledgeable person to walk you through a tough technical challenge ...call Aaron.



# Saving Energy with LED Lighting

For a recent project at a shopping plaza in Manchester, New Hampshire, the property manager's goal was to address the whopping electricity bill generated by 22 high-pressure sodium (HPS) and six metal halide parking lot lamps. Each year, the lighting was racking up about \$8,000 in energy costs, plus an additional \$11,000 in bulb replacement and maintenance costs. The goal was to cut total energy consumption from parking lot lighting—51.1 megawatt-hours per year—by 50%.

LED lighting was selected to retrofit the parking lot, reducing electricity consumption in the first phase to 19,000 kWh per year (approximately a 62% reduction). The second phase should reduce electricity consumption by an additional 7% to 10%.

In the first phase, 13 poles and 28 400-watt metal halide and HPS fixtures were replaced with 25, “two-level” (217- and 78-watt modes) LED fixtures, equipped with motion sensors for reducing energy consumption when the lot is in low use, such as late at night. Phase two will replace existing canopy down-lighting with LED fixtures, reducing the bulb wattage by 75%.



Courtesy BetaLED

The new LED lighting provides excellent visibility and better control throughout the site, reducing security concerns. The original projected return on investment (ROI) for this project was four years, but rising energy costs, a deviation from projected run-times, and maintenance savings have reduced the projection to less than three years.

When business costs are a constant consideration, especially for property owners and retail tenants, LED lighting can be effective in decreasing long-term operational expenses. LEDs also have an extremely long life—depending on the fixture, they can last more than 100,000 hours without maintenance. Plus, LED technology provides lighting options that are manufactured in the United States from recycled materials; do not contain mercury or lead (reducing the danger and cost of disposal); do not emit infrared or ultraviolet radiation; and are compliant with Energy Star's Dark Sky initiative, which requires streetlight shielding to reduce lighting intrusion on night skies.

The U.S. Department of Energy accepted this project as a Solid-State Lighting GATEWAY Demonstration Project—the first in the Northeast. For more information, visit [www1.eere.energy.gov/buildings/ssl/gatewaydemos\\_results.html](http://www1.eere.energy.gov/buildings/ssl/gatewaydemos_results.html).

—Cass Thurston

## Efficiency vs. Renewables

While this energy-efficiency retrofit appears expensive (\$46,640), the payback time is short, resulting in cost savings for more than 15 years—the expected life of the lighting. And many states or utilities have incentives programs that reduce retrofitting costs even more.

Energy-efficiency measures almost always offer a better return on investment than turning first to renewables. A PV system designed to offset the same amount of electricity as this retrofit (about 32,100 kWh each year) would need to be about 26 kW with a cost of about \$143,000 (assuming \$5.50 per watt for a commercial PV system, and without taking the 30% federal tax credit).





Actions speak  
louder than words

Visit us at  
Solar Power  
International 2010

Booth 4027

## The Fronius Difference

At Fronius, we're proud of our products and service, always working to ensure the highest quality standards. We strive to return phone calls and emails in a timely fashion. We have created a paper-free, low-stress service process supported by knowledgeable technical support. And we stand behind our products with a standard 10-year warranty, expandable to 15 years. We are always working to provide an excellent customer experience. Simply put, we do what we say we will and call that "The Fronius Difference."

To that end, we want to hear from you, our customers. What are we doing right? What can we improve? Please take a few minutes of your time to help us put your words into action by completing a survey. Visit **[www.fronius-usa.com](http://www.fronius-usa.com)** and click on the link to our survey. Survey participants will be entered to win some great prizes in a monthly drawing, from March through September, and a grand prize drawing to be held at Solar Power International 2010 in October. Sign up for our monthly newsletter for more information on prizes and other news from Fronius.

Want more information on Fronius products? Visit **[www.fronius-usa.com](http://www.fronius-usa.com)**, or call **810-220-4414**.



POWERING YOUR FUTURE

# To Tilt, or Not to Tilt

In a perfect world, the sun's rays would always be perpendicular to your PV modules. In reality, the sun's location changes throughout the day and across the seasons and, unless you have a tracking system, modules are in a fixed position. Should you adjust the module tilt for the seasons? Maybe.

Using Charlotte, North Carolina, as an example, the greatest *average* radiation for a fixed-tilt array is with the tilt equal to latitude ( $35.22^\circ$ ) with 5 kWh per  $\text{m}^2$  per day. PV modules set at a tilt equal to latitude plus  $15^\circ$  ( $50^\circ$ ) get more sun from October to February. From April to August, PV modules tilted at  $15^\circ$  less than Charlotte's latitude also see more solar radiation than those set equal to latitude. Certainly, you can ignore all this and decide to live with the average of 5 kWh/ $\text{m}^2$ /day. But if you decide you want to squeeze out a few more kWh from your array, you will have to put some effort in. For an off-grid system, those few extra kilowatt-hours are often worth it, particularly in the colder months. (But off-gridders may choose to permanently set their tilt to the ideal winter angle, often not needing all possible production in the summer.)

**Pole-mounted arrays are easiest to adjust seasonally because the pivot point is at the center of gravity. Roof-mounted arrays are the most complicated—and dangerous—to adjust.**



According to NREL's PVWatts calculator, a 2 kW array tilted equal to the latitude in Charlotte would produce approximately 2,636 kWh annually. Going for maximum monthly production requires adjusting the array angle monthly, and may yield 5% more in production. However, just adjusting it twice annually (in March, to latitude minus  $15^\circ$ , and in October, to latitude plus  $20^\circ$ ) will eke out 4% more production. Over 25 years, the extra energy adds up.

Some mounting spots and hardware configurations are more suited to tilt adjustment than others. Modules mounted on pitched roofs, for example, present challenges in accessing the array. Wind loading on the building—caused by arrays tilted up from the roof surface—can be a concern. Additionally, aesthetic preferences may rule out an adjustable array on a pitched roof—many people favor an array that's mounted parallel to the roof plane, rather than modules sticking up at an angle.

Accessible, flat roofs may be decent candidates for tilting, but adjusting the tilt of the modules will change the shadows they cast, and unless the row spacing was designed to handle the steeper winter tilt, adjusting one row may shade the row behind it. However, for most roof situations, it is probably easier and less expensive to increase the size of the array by 5% than to address the mount type and additional space required for manual tilt adjustment.

Ground-mounted and pole-mounted systems offer a greater accessibility and adjustability of tilt, with a variety of applicable products. Just be aware that ground-mounted and pole-mounted projects require more material and site preparation—digging, placing forms and anchors (or poles), and pouring concrete—which increases the cost. A large, top-of-pole mount will likely have some built-in adjustability, although an array larger than 2 kW may require two people to safely adjust the tilt angle. Some multipole installations divide the modules into adjustable groups to make the arrays more manageable.

Take the same 2 kW array and move it north to snow country—then, the conversation about tilt changes from improving production to guaranteeing *any* production in winter months when snow can accumulate above 3 feet. If your array is set at  $30^\circ$  versus  $60^\circ$ , it will accumulate more snow, and it will take longer for the snow to slide off.

So, to tilt or not to tilt? It all depends on:

- Off-grid or utility-intertied;
- PV array size;
- Roof type;
- Snow country; and
- the amount of effort you wish to put in.

—Erika Welicko



Visit us at  
Booth 3211  
Solar Power International



## Solar has never been more popular

As the world's most prestigious sport, F1 embodies the pursuit of excellence through technological expertise and innovation. At Trina Solar, it's because of this shared passion for innovation that we've teamed up with the Renault F1 Team, one of Formula One's most advanced teams. As solar accelerates on the track to grid parity, we think it's time to bring solar to an even larger audience – the world. For more information, visit us at [www.trinasolar.com](http://www.trinasolar.com)

**Trina**solar  
The power behind the panel

Official Sponsor of

**RENAULT**  Team

# Blast from the Past

In 1980, after living without electricity for five years in the woods of Vermont, I bought my first PV module. Responding to an ad in a back-to-the-land magazine, I sent a check to Joel Davidson, an urban refugee who was facilitating a bulk purchase of PV modules. From his off-grid acreage in Pettigrew, Arkansas, Davidson was selling 33-watt Arco Solar modules (model 16-2000) for \$275 each.

That was more than three decades ago, and I was curious about how 30 years in the Vermont sun and snow would impact a module's performance. So to mark the anniversary of my first PV module, I decided to climb up on my roof and bring it down for testing.

The module was designed to charge a 12 V battery at a maximum voltage of about 16 V. When new, the 33 W module produced 2 A in full sunlight.

So, how did the old module measure up?

## Better than Factory Specs

I decided to test the module by connecting it directly (with no battery) to two different 12 V loads: a 35 W incandescent light, and a blower rated at 4.5 A (about 54 W).

I ran the test in my backyard, on a sunny day at 11:30 a.m. The outdoor temperature was about 50°F.

The old PV module easily powered up the light; my Fluke multimeter showed that under a full load of 2.015 amps, the module's voltage was an impressive 14.93 volts.

Next, I hooked up the 54 W blower directly to the module. Almost immediately, the blower started spinning at a fast clip. According to the Fluke, the blower was drawing 2.5 A from the module—more current than would be expected from the factory specs.

I described my test to Raju Yenamandra, the North American head of sales and marketing for SolarWorld, the current owner of the old Arco Solar factory in California. "That's unbelievable," said Yenamandra.

"Your module is still performing to factory specifications—or perhaps a little better. We usually tell people to anticipate a performance degradation of 0.27% per year." Yenamandra informed me that my module—serial number 256387—was manufactured in 1979, during the very early years of Arco's PV manufacturing history.

Joel Davidson, the PV dealer who sold me the Arco from Arkansas, now lives in California. When I called him, he said, "Your test results don't surprise me. Solar modules are the most reliable electricity generation source in the known universe. A PV cell is a rock that makes electricity. Unless something corrodes the electrical contacts, it will still keep working."

Davidson was happy to reminisce about the early days of PV. "I was selling to a range of people: back-to-the-land hippies, right-wing extremists and survivalists, engineers, hobbyists, and Christian missionaries on their way to Africa," said Davidson.

## Good for a Few More Decades

My old module shows no signs of browning, electrical corrosion, or water intrusion. Since I bought my first module three decades ago, PV manufacturers have made many improvements. While my old Arco panel has simple electrical lugs on the back side for wiring, newer modules have sturdier junction boxes. Manufacturers have also improved encapsulation and the lamination materials. It certainly looks as if it's ready to perform for another decade—or two, or three.

—Martin Holladay, adapted with permission from [www.greenbuildingadvisor.com](http://www.greenbuildingadvisor.com)



## web extra

Want to see how your modules measure up? See our detailed instructions on testing and verifying module voltage and current at [www.homepower.com/webextras](http://www.homepower.com/webextras)

Courtesy Noah Manning



**Over 500 Certified  
Partners and  
Growing!**



*The **BEST NAMES** in solar  
at the **BEST PRICES***

-  **Design Support** - End-to-End Design Support Services
-  **Financial Support** - Financial Solutions for Your Business & Customers
-  **Consulting Support** - NABCEP Certified Installation Consultants to Support Your Projects
-  **Rebate Support** - Rebate Assignment & Coverage Solutions
-  **Logistics Support** - Remote, Field, Project Site & Rooftop Delivery Solutions

*The **BEST SUPPORT SERVICES**  
available in solar*

Entry Level Solar Training      Electrician Solar Electrician Training  
PV Technical Sales Training      Advanced Solar Design  
NABCEP® Exam Prep Class      PV Design and Installation - ONLINE

**NABCEP Approved Provider and ISPQ Accredited**

*The industry's most recognized  
**SOLAR TRAINING***



**ONTILITY is the only source for  
ALL OF YOUR SOLAR NEEDS!**

To learn more, please contact us Toll-Free at: **1.877.858.7479** or visit us at: **www.ontility.com**

*Solar Supply - Solar Design - Solar Consulting - Solar Training - Solar Financing - Solar Technology*





Courtesy Khalid Harbi

### Home Power on iPad

Thanks to your help, now it's easy to subscribe to my favorite magazine and browse it on my iPad.

Khalid J. Harbi • via e-mail

### Ultimate Recycling

We have lived off-grid in southwestern Costa Rica for more than 30 years. We started out in a thatched shack with a dirt floor, which flooded every rainy season, cooking on driftwood, and using candles and kerosene for lighting. The first time we went swimming, we looked back at the shack from the beach and it was sitting at the end of a rainbow (this actually happened). Talk about an omen!

Three decades later, we live in a concrete-block house with tile floors and steel roofing. A 1,500-watt solar-electric system provides our energy needs and *Home Power* has been my bible. Of course, it didn't all happen overnight.

The candlelight slowly evolved into a fuel-fired lantern—you know, the ones with the fragile mantels. The next step was a car battery and a couple of car tail lights mounted through a hole in a coconut shell wrapped in tin foil. We would take the battery to the gas station every month or so for charging. I honestly can't remember where the first solar-electric module came from, but I could see immediately that this was the answer.

We brought some modules on one of our few visits to the states, and had friends and family bring them down when they visited. Ditto the other goodies required as the system grew, such as charge controllers

and the first, small modified-square-wave inverters. At one point, we got pretty serious, and along with a friend, imported a pallet of modules, which we distributed to other people.

Recycling is second nature to us, and the materials in these modules are just too valuable to throw away—and I always wanted one of those fancy stainless steel, glass-topped coffee tables. It must have been a dream—or maybe it was my pocketbook—but

putting four legs on a solar-electric module seemed the way to go. I had not only built all the structures on our property, but all the furniture as well.

The solar-electric module is an old Kyocera (LA 361 J51) that doesn't fit into my present system. The legs are wooden and shaped from some pieces of 1 by 3. The aluminum frame on the module was easy to drill, and the legs can be attached with screws or small bolts. After a few months of my dog crashing into the table, I reinforced the legs with some fiberglass and resin. The module will still produce a few amps, and I've often thought about adding some small fan or toy just for kicks. This 10-year subscriber says thanks for all the help.

Ron MacAllister • Golfito, Costa Rica

### Ohm & Home

I enjoy your magazine, but have just a small nit to pick in the *HP138* article, "Beyond your Utility Meter." The "Power vs. Energy" sidebar on page 58 says you can use Ohm's law to calculate power: Volts × Amps = Watts. Ohm's Law describes the relationship between voltage, current and resistance:  $V = IR$ .

I'm a retired electrical engineer who spent 32 years making electricity by burning coal, and I always dreamt about doing it with solar energy. My wife Joanne and I completed our solar-electric installation in October 2007. It consists of eight Evergreen 180s, wired four in series and two strings in parallel into an OutBack MX60, charging a 24 V Rolls battery bank (twelve, 2 V, 1,766 Ah). It's inverted and grid-tied via two OutBack GVFX3524 inverters wired for 120/240 VAC. We also had to reinforce our garage roof to accommodate the modules and Unirac racking.

We have had some prolonged outages at my house, and although I originally had a gasoline-powered generator, the solar-electric system has a much higher geek factor. And the gen-set was still fossil-fueled! So all my essential loads—oil-fired water heater, septic pump, well pump, fridge, computers, and, of course, the microwave—are set up to run on battery backup when my supplier and former employer lets me down. Unfortunately or fortunately, however you look at it, since the system's been in, we've had few outages, and none more than three or four hours. Nevertheless, I'd do it again. It's a hobby, and my small contribution to the environment. I figure my system will have paid for itself about 30 years after I'm gone.

Mike Curran • Chagrin Falls, Ohio



Courtesy Ron MacAllister



### Battery Voltage Decision

I would like to share a different point of view on battery voltages and system sizing than stated in "Ask the Experts: Change Battery Voltage" (HP137). The *only* voltage I would consider for a home system is 48 V. One of the main reasons is the voltage drop from connection resistance. Any resistance in a battery or DC-side connection will drop twice the voltage if a 24 V system is used instead of 48 V.

Say there is 0.01 ohm resistance in a battery connection. A current (either during charging or discharging) of 20 A in a 48 V system would represent a voltage drop of 0.2 V—0.416% of total battery bank voltage. With a 24 V system, the current will be twice that of a 48 V system when the same power level (wattage) is at work. Consequently, the same 0.01 ohm resistance will cause a voltage drop of 0.4 V or 1.66% of total battery bank voltage—about a 300% increase. This loss occurs in both directions—during charging and discharging.

Measure the total battery bank voltage and connection—put one probe on the terminal of the battery itself and the other probe on the battery jumper wire (not the connector terminal). There will likely be some voltage differential, but it should be small—maybe

10 mV for a 48 V system. If the reading from a 48 V system is in the hundreds of millivolts, then there is a problem. A good rule is to look at the best connection you have (lowest voltage drop)—that should be a reasonable goal for all the battery connections.

This exercise brings to light the weaknesses of battery jumper cables versus copper bar. With jumper cables, there is a connection between the battery terminal and the terminal lug, and another connection between the terminal lug and the wire, which doubles on the opposite end of the cable as well. With copper bar, the only contact is between the bar and the battery terminal. With fewer mechanical points of contact, bus bars offer less resistance.

Beyond losses, there is much debate about battery-based system sizing in general. Personally, I do not want a large battery bank that gives me several days of backup power. I would much rather take those thousands of dollars and invest in generation capacity. With a relatively small battery bank and a large generation capacity, the battery bank will rarely get discharged because of the larger PV system. Even on cloudy days, a large solar array can charge a small battery bank to near full capacity. If sized



Courtesy Rick Zuber

correctly, the battery can operate smaller loads throughout the night. With prices of solar-electric modules dropping, this has become a very reasonable approach.

Rick Zuber • SolarWind Energy,  
Sterling, Alaska

### Errata

The drainback system article starting on page 78 in HP138 had a few errors and omissions.

Drainback (DB) systems are almost always piped in 3/4-inch copper tubing or larger to prevent freezing by draining the system quickly.

## TrakStar™ Technology

The Most Advanced MPPT Solar Controllers



VISIT US AT  
Solar Power Int'l - Booth 1321

### MAXIMIZES ENERGY HARVEST:

- Better peak power point tracking than other MPPT controllers
- Fastest sweeping of the entire I-V curve
- Recognition of multiple power points during shading or mixed PV arrays
- Superior performance at sunrise and low solar insolation levels

### TriStar MPPT

45 or 60 amps  
150 volts open circuit



### SunSaver MPPT


15 amps  
75 volts open circuit



world's leading solar controllers & inverters



PHONE: +1.215.321.4457 [www.morningstarcorp.com](http://www.morningstarcorp.com)

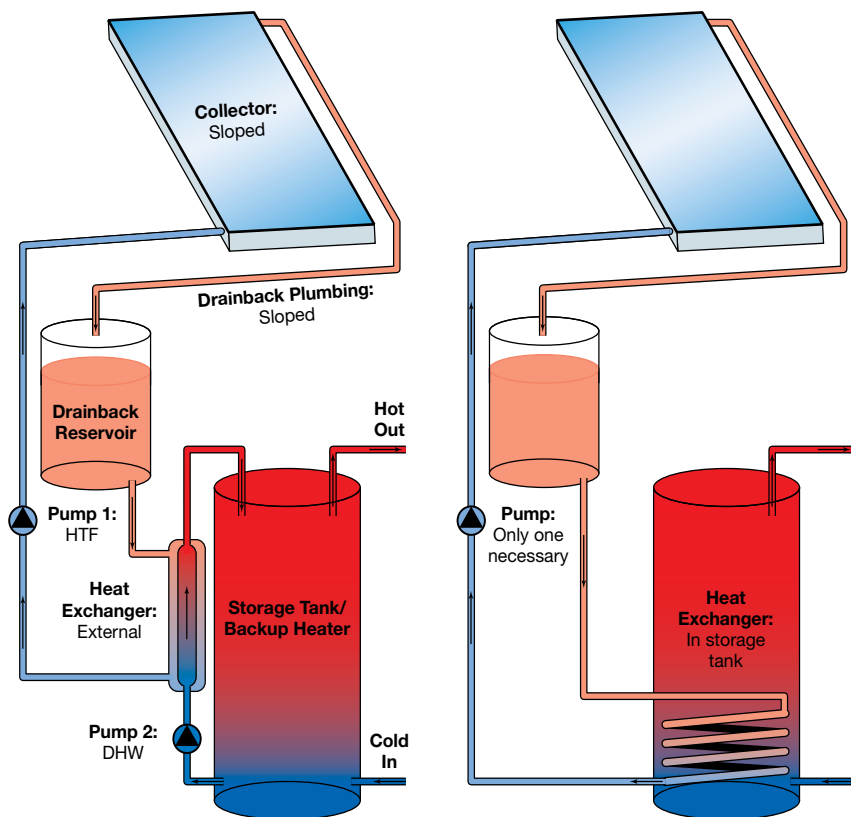

The size of a DB tank with an internal heat exchanger should always be at least twice the volume of the collectors and piping in the system—this will keep the internal heat exchanger immersed when the DB tank is half-filled with air.

Finally, it is extremely important that the hot return pipe from the top of the collector(s) terminate above the water line in the top of the DB tank to allow air to rise to the top of the collector, break the vacuum and allow the system to drain. Most of the collector loop fluid will drain back through the high head pump. The air will travel up the return pipe at the same time the collector loop fluid drains into the DB tank. The two drawings on the right hand side of page 83 did not reflect this critical piping configuration, and the drawings here are one way of correctly plumbing these systems.

Chuck Marken • Solar Thermal editor

## write to:

[mailbox@homepower.com](mailto:mailbox@homepower.com)

or Mailbox, c/o Home Power  
PO Box 520, Ashland, OR 97520

Published letters are edited for content and length. Due to mail volume, we regret that unpublished letters may not receive a reply.



Lighthouse solar Franchising Company

## Join Our Growing National Brand!

Franchise partnership has clear benefits

- proven business model
- turn-key operations manual
- comprehensive training program
- group purchase power
- growing national brand

We offer ongoing support:

- marketing services
- design & bidding services
- shared best practices
- supply chain management
- continuing education

Convert your current solar business to a **Lighthouse solar** franchise.

Apply online to be part of the solution!  
[www.lighthousesolarfranchising.com](http://www.lighthousesolarfranchising.com)

Be part of the solution



Lighthouse solar | 303 638 4562 | [www.lighthousesolarfranchising.com](http://www.lighthousesolarfranchising.com)



# The grass is greener



The revolutionary LSX frameless module system is here



# SunDancer.com

DC-powered refrigeration



## The TriMetric Basic Battery System Monitors

Two New Products!

Display vital battery system data to help users provide better battery care, conservation awareness and aid system maintenance: • **Volts** • **Amps** • **Amp-hours** • **Battery% full** • **Days since charged**



**NEW! TriMetric TM-2025-RV**



**Traditional TM-2020**  
(without optional enclosure) \$169

**TM-2025-RV features:**  
12-48V operation standard. Higher lightning resistance. Smaller package includes enclosure. Also Watts. Records system analysis information to help find system problems. **\$180**

## The PentaMetric Battery System Monitor with More Capability

The choice for advanced system analysis and maintenance.



- **Data Logging** - records 3 weeks of system details
- **System Troubleshooting** by comparing to previous data.

### NEW! Computer Interface

The P-100-CE with Ethernet connection. Now analyze renewable energy system performance via remote internet connection.

The PentaMetric System with (non internet) RS232 computer interface **\$320**

Optional LCD Display unit (shown above) additional **\$199**

**details at: [www.bogartengineering.com](http://www.bogartengineering.com)**

**BOGART ENGINEERING** (831) 338-0616 19020  
Two Bar Rd. Boulder Creek, CA 95006 USA



# What makes a PV module exceptional?




It has to outperform its competition. It has to generate high yields, generate them reliably and continue to generate them for years. Conergy's PowerPlus does just that. The **Conergy PowerPlus** series of PV modules ensures you get maximum return on your investment.

Across the globe, one in every ten modules is manufactured, sold or installed by Conergy. We hold ourselves and our products to the highest standards. That is why Conergy is the global leader in PV systems.

## Discover **Conergy PowerPlus**

[www.conergy.us](http://www.conergy.us) | [info@conergy.us](mailto:info@conergy.us) | 888.396.6611

Visit Conergy  
at **Solar Power  
International**  
West Hall  
**Booth 906**

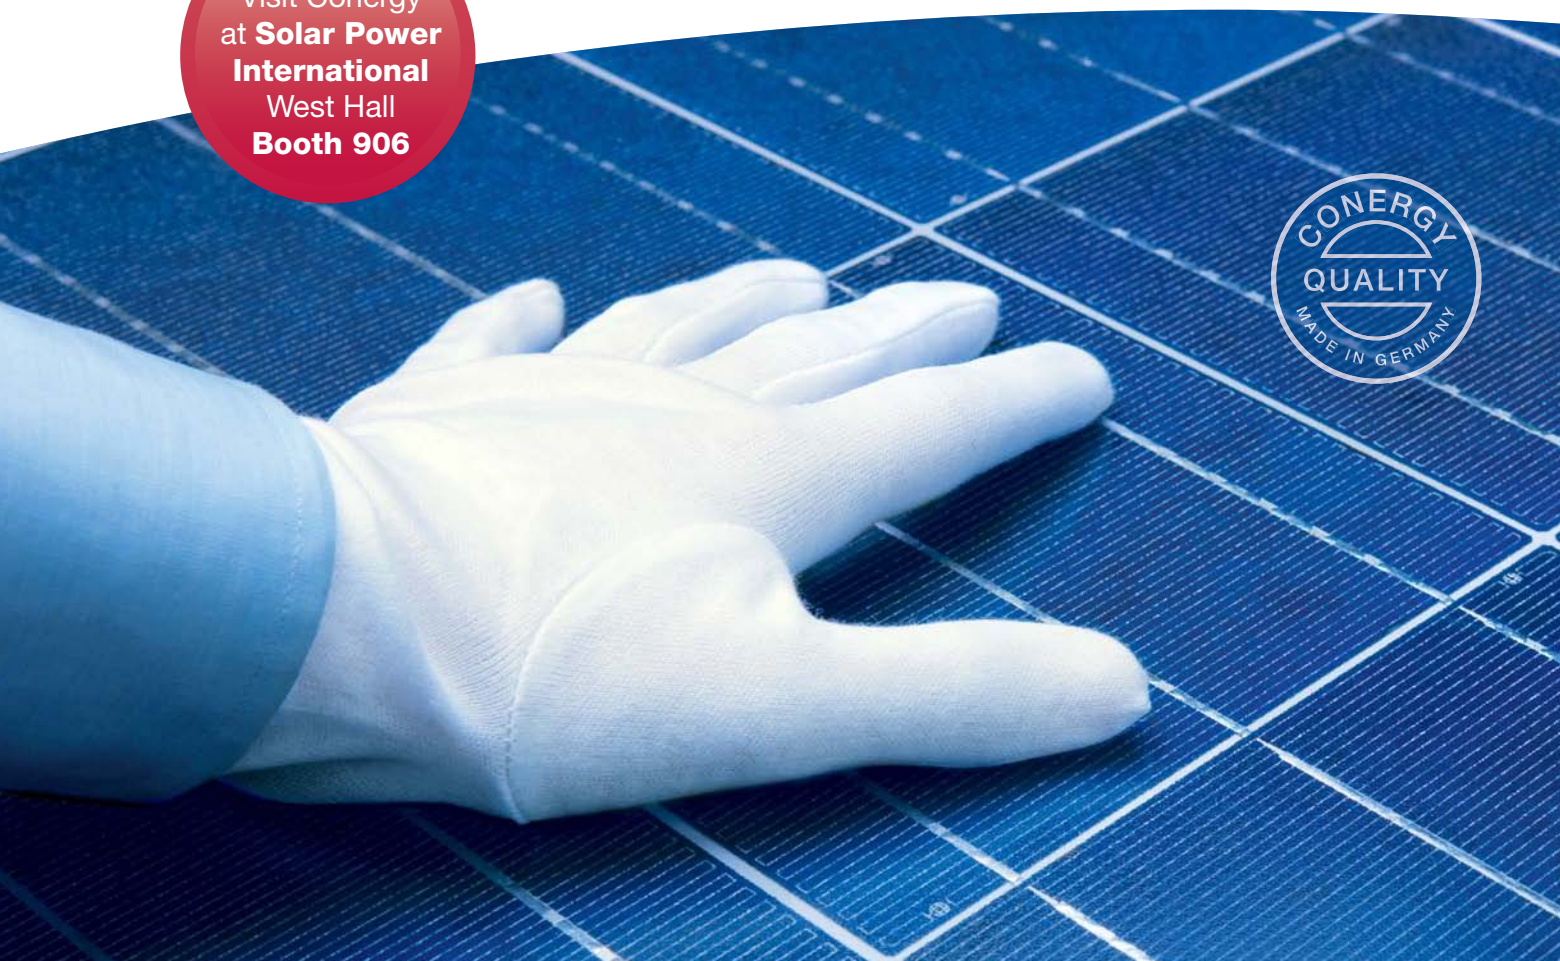

## Radiant Floor or Forced Air?

We are considering an eight-collector solar domestic water/space heating system for our 10-year-old, ranch-style home in central Wisconsin. The home, including a full basement, is about 3,000 square feet. A corn stove in our basement and a wood-burning heater in the upstairs living room provide most of the space heating. A propane forced-air furnace provides the rest. We use about 150 to 200 gallons of propane per year.



About 85% of the upstairs flooring is carpet; the rest is tile. We have about 1,000 square feet of unfinished basement with exposed ceiling. My plan was to install PEX tubing in the ceiling to provide some extra heating in that part of the house.

Two of the installers I talked to thought that my PEX plan would work OK. The third installer suggested a water-to-air exchanger installed into the ductwork and a whole-house circulating fan to extract the heat. He was concerned that the subfloor and carpet above would inhibit heat transfer.

The radiant heating retrofit would cost about \$1,000 to install; the other method would cost less. Any ideas as to which method is best and would extract the most heat from my proposed system?

Jason Lang • Medford, Wisconsin

If you were building a new home, a solar-assisted, low-temperature radiant heating system would be the most comfortable, quiet, and efficient system. The problem with your existing home is that to use solar-heated water effectively, you need a low-temperature radiant floor system, which doesn't need more than a 120°F water temperature on the coldest day of the year. Low-temperature radiant heat is typically paired with concrete slabs, thin slabs, or above-the-subfloor applications just below tile or hardwood flooring.

Stapling PEX under the subfloor and under carpet is rarely a low-temperature radiant option. Often, these systems have trouble keeping you warm on very cold days—even with high radiant water temperatures. To find out for sure, you need to know the R-value of the carpet and pad, and then use radiant design software to run a heat loss calculation. Then, you can identify what your load and water temperature needs actually are. You may want to hire a certified radiant and solar heat designer to do this for you.

One option, though it would add to your costs, would be to remove the carpet and install a thin slab or above-the-floor radiant board system under tile or wood flooring. If that is not possible, the warm-air ducted system may make more economic sense. Placing a solar hot water coil in the furnace would be the least expensive strategy. You could improve the comfort and control of the warm air system by adding zoning, controlling each floor with its own thermostat.

I would also recommend upgrading the blower motor to an electronically commutated motor (ECM), which qualifies for a tax credit and, sometimes, utility rebates. The ECMs are much more efficient than other blowers and can run at very low airflow (CFM) using little energy to move heated air around your home. One possible system is Arzel Evergreen Zoning ([www.arzelzoning.com](http://www.arzelzoning.com)), which includes both zoning and ECMs in the package. You could also look at extending your return air ducts to just behind or above your stoves to pull the warmest air off these units and move it to the cooler parts of your home. Use the very low speed setting on your new ECM blower to reduce the chance of feeling a cold draft.

Getting solar to work with a heating system can add a lot of complexity to piping, wiring, and control systems. Make sure your installer has done this before or has help from someone experienced. Download Caleffi's *Idronics* No. 3 & No. 6 journals on solar combination systems ([www.caleffi.us](http://www.caleffi.us))



for some piping and control ideas. Several manufacturers are offering integrated solar thermal domestic water and space heating systems. They come with all the components, collectors, tanks, controls, and piping and wiring diagrams. This can take a lot of the guesswork out of getting all the parts to work together, and is worth considering.

Eight solar collectors is a large system. Each square foot of collector area usually requires 1.25 to 1.75 gallons of water storage in Wisconsin, which translates to a 300- to 450-gallon tank for your system. I recommend a drainback system to avoid overheating your heat-transfer fluid when the tank is up to temperature and the sun is still shining. This is especially important with a large system like you are proposing. A large heating load like a pool or outdoor hot tub can be put to use with all of the extra solar energy that'll be stored in your tank in the summer. If you use a glycol system, you will need a reliable heat dump such as a fan-coil hydronic unit heater, outdoors, and piped and wired into your solar collector glycol loop and control.

Bob Zima • Radiant Panel Association certified trainer

## Back-Up Generators

I have an off-grid house in a roadless area, accessible only by boat. I need an automatic backup (not standby), propane-fueled generator to charge batteries during winter, when sunlight is minimal and I'm away. The generator needs to draw no energy when off, have a two-wire autostart on a signal from the inverter/charger, and be configured for full power at 120 volts. Honda portables won't work—they're not propane-powered and, for safety reasons, the dealer strongly warned against aftermarket fuel modifications. Current models of Kohler, Baldor, and Onan/Cummins standby generators won't work because they have always-on power requirements and are not reconfigurable to full 120 V output. The only choice I'm aware of is to adapt an RV generator, but I'd prefer a unit made for off-grid use—without modification. Since others must also face this problem, I'd appreciate any input you have.

John McMurry • via e-mail

You have hit a common problem in the off-grid world. As far as I know, what you're seeking isn't available. This is a point I



Courtesy Generac

**SEALED - MAINTENANCE FREE - DEEP CYCLE BATTERIES**

**5-Year WARRANTY**

## Less Work, More Energy.

**A sealed, maintenance-free battery to power your needs!**

- Superior Capacity - To meet your daily energy needs
- High Quality Product - For long battery life
- Maintenance Free - No watering
- Non-spillable and Non-hazardous - Clean and Safe Operation
- Your Clean-Green Energy Solution

**For more info contact us:**  
[sales@fullriverdcbattery.com](mailto:sales@fullriverdcbattery.com) | 800-522-8191 | [www.fullriverdcbattery.com](http://www.fullriverdcbattery.com)

\*5 Year Warranty applies to certain models used in select applications only. Please see [fullriverdcbattery.com](http://fullriverdcbattery.com) for more information.

addressed in my article on generators in "Engine Generator Basics" (HP131). All of the features that you are seeking are reasonable—and *used* to be available. The main generator manufacturers have moved toward "residential standby" models that are 120/240 V only. They need grid power to maintain starting battery charge and some even have an electric carburetor heater.

You might seek out a good used Kohler 6.5 RMY (1,800 rpm; twin; discontinued around 1999), 8.5 or 11 RMY (took the 6.5's place; 3,600 rpm, twin) or the 10 or 12 RY (1,800 rpm, water-cooled, four; discontinued about five years ago). All of these are two-wire start and field-configurable to straight 120 V output. Older Onans, such as the 6.5 Commercial, will also work as long as you include their two-wire start (TWS) auxiliary module. In fact, I would look for one of these older units in good shape with reasonable hours before I would consider most new units.

I have spoken with a few major generator manufacturers about the need for a product that does just what you're asking. Recently

Generac, one of the largest industry names in other generator applications, told me they are developing just this product. It hasn't been tested yet by our industry, and, historically, Generac has a weaker reputation in the off-grid RE industry, so there's no word on how well it fills the bill. But this might well be a reason to wait and watch—if it proves out, it might be a good solution to your problem.

Allan Sindelar, Positive Energy •  
Santa Fe, New Mexico

## Local Motivation?

I live in Washington State, and the production incentive here pays a premium for solar electricity produced with components made in the state. I'm trying to decide whether to pursue using these components, which are more expensive and less efficient. How's a person to decide?

Sarah Wexler • Kirkland, Washington

The Washington state production incentives, also called "feed-in tariffs," seem quite attractive. Systems with no Washington-made components, such as

inverters, get 15 cents per kWh. Systems with only a Washington-made inverter get 18 cents per kWh. Systems with only Washington-made solar-electric modules get 36 cents per kWh. And systems with both modules and inverter made in Washington receive 54 cents per kWh. This is in addition to the net metering value of 3 to 12 cents per kWh, depending on your utility.

Before you make your buying decision, look at your motivations, at the specifics of your situation, at the equipment you are considering, and at the long-term picture.

While getting a value of 54 cents per kWh might seem compelling, many people do not approach renewable energy from a financial perspective. Other very common motivations are environmental, energy reliability, independence, and "cool factor." Your motivation may have a strong influence on your decision.

Your site characteristics—especially the space available for an array—may also be influential in your decision. The only

## WANTED: Qualified Thermal Installers

*for the most enlightened solar hot water system under the sun!*

- **INCLUDES EVERYTHING YOU'LL NEED** shipped to you on a single pallet.
- **INSTALLS IN ONE DAY** with a 2-man crew.
- **20-YEAR WARRANTY** and proven 25 year track record ensures customer satisfaction.
- **NATIONAL ADVERTISING CAMPAIGN** supports your local sales.
- **U.S.-BASED CALL CENTER** provides tech support 6-days a week to you and your customers.

*"Sunward has put together the most well thought out and complete hot water package in the industry."*

— BASK POWER, Western Massachusetts

**FREE SHIPPING + EXTRA \$500**  
Introductory Offer for qualified installers

**For Your FREE Sunward  
Information Kit call TOLL-FREE**

**1-877-201-8811**



SUNWARD™

Solar hot water made simple.





Washington-made modules available are less efficient (they are about 40% less efficient, so they take up about 40% more space for the same production) than the best on the market. They are also built only in a 4- by 4-foot configuration.

These two factors can combine to limit the size of your system significantly if you have a small roof that is the wrong size to handle 4-foot modules. I have seen cases where using these modules cuts the system wattage almost in half compared to the most efficient modules available. In this case, using the Washington-made modules will serve someone with a financial motivation better than someone who has an environmental motivation. The question becomes, "Do you want to make more money or more solar electricity?"

It's also important to be clear that the Washington-made modules are produced by a small company without a long track record. The module warranty is shorter than industry standard (20 years instead of 25). But to some people, this might be entirely offset by the attractiveness of buying from a local company that provides local jobs.

When you are dealing with systems that "earn" up to 66 cents per kWh, it's not hard to calculate simple returns in the 10% range. But it's important to understand the key factors. For instance, you must have a federal tax liability to take advantage of the 30% tax credit. And the Washington production incentive sunsets in 2020, so the longer you wait to buy your system, the lower the long-term return is. We won't know until closer to that year whether the incentive will be extended. Examine your motivations, your site, and your financial picture, and make a decision that serves your own needs. One way or the other, you'll be helping yourself, your community, and the planet.

Ian Woofenden •  
Home Power senior editor

## write to:

[asktheexperts@homepower.com](mailto:asktheexperts@homepower.com)

Published letters are edited for content and length. Due to mail volume, we regret that unpublished letters may not receive a reply.



Courtesy Ian Woofenden

## OUR NEW 2010-2011 FULL COLOR CATALOG IS AVAILABLE!!

Our NEW 200 page color Planning Guide/Catalog teaches the basics of installing solar, wind and hydro electric systems. It is **FREE** to readers of Home Power Magazine if you mention this ad!

Backwoods is different because we know what we sell. Our technical sales staff live in homes that get their power from the wind, water and sun using the products in our catalog.

Our team is here to walk you through the installation and help with any questions that may arise. We offer **FREE** system design and after sale support by telephone and email.



SPECIALIZING IN INDEPENDENT POWER FOR OVER 30 YEARS

**REC 215W SCM**  
**Starting at \$1.50 per watt**  
**for pallets of 30**

1589-HP Rapid Lightning Road  
Sandpoint, ID 83864  
phone: 208.263.4290  
email: [info@backwoodssolar.com](mailto:info@backwoodssolar.com)



# **CAUTION:** All users of Interstate Battery deep cycle battery products.

For over 20 years U.S. Battery Manufacturing has supplied Interstate Battery Systems of America with the bulk of their deep cycle batteries, specifically the U 2200, the U 2000, the U 1800 and the U 2200 NAC batteries. Those of you who have been loyal customers of these products over the years for any number of reasons, not the least of which is the quality, should know that

**as of March 1, 2010, U. S. Battery Manufacturing Company will No longer supply Interstate Battery** with these battery types.

If you would like to continue purchasing the Made in USA, U.S. Battery brand, we would invite you to call **1-800-695-0945** or go to **www.USBATTERY.com** to find your local U.S. Battery authorized distributor.

**What's Really  
Under Your Seat?**

*"We have always counted on  
U.S. Battery's American made  
batteries for one simple reason.*

*In our opinion, they are the  
best battery available  
at an honest value"*

Rob Reilly - Sales Manager  
**DRIVE ELECTRIC**



**You can always count on U.S. Battery for  
the longest drive time on a single charge.**

We have over 85 years of experience manufacturing premium deep cycle  
batteries providing you Quality, Reliability, Durability & Value

See our entire line of AMERICAN made batteries at **www.USBATTERY.com**



# MMP Installation is Simple As



## 1 Mount the Backplate

Mount the BP-MMP backplate to the wall on 16 inch centers. The back plate is 16 ga. powder-coated steel and features ¼-20 pemnuts for fast installation of the inverter and MMP enclosure.



## 2 Install the MMP Enclosure

Start four of the supplied ¼-20 bolts into the pemnuts to mount the MMP enclosure. Four mounting keyholes allow you to simply place the enclosure over the bolts and tighten them without having to support the enclosure during installation.



## 3 Install the Inverter

Place the inverter/charger on top of the enclosure and secure with supplied bolts. The enclosure supports the weight of the inverter/charger, allowing one person to install a 60 lb inverter/charger without help. The DC positive and negative buss bars are preinstalled, connecting the DC once the inverter is in place. Connect the AC input and output wiring, battery cables, and optional DC breakers.



# Done

Attach the optional ME-RC or ME-ARC remote control to the front cover, install the front cover, and you're done.

**MAGNUM**  
ENERGY

Visit us at Solar Power  
International 2010 – Booth 1334

To learn more about the MMP and other Magnum  
products visit [www.magnumenergy.com](http://www.magnumenergy.com)





# Ground Mounts for PV Arrays

Courtesy Joe Gamble

by Rebekah Hren

**Roofs aren't the only places for PV systems—ground-mounted systems offer their own unique advantages.**

Choosing the structure to secure your PV array—roof, pole, or ground mount—is a process of weighing the pros and cons of each. Cost or energy-production comparisons might yield an answer, but sometimes the site speaks loud and clear.

Ground mounts, like pole mounts, can often accommodate larger PV arrays, as they are not limited to the size of the roof and can take advantage of the best solar window a site offers. Array installation and maintenance is done on terra firma—no climbing, no safety roping. There are no roof penetrations to leak, and with increased airflow around them, modules can operate at lower temperatures—yielding higher performance. Being able to choose the perfect tilt angle and azimuth also results in optimum performance. And while PV arrays don't *have* to be cleaned, spotless modules do produce more energy; ground-mounted modules can be more easily washed of dirt, dust, and bird droppings. So if a site has wide-open, unshaded space to use for a PV array, ground-mounting can be the best option.

**Above: Ground mounts can work in situations where roof mounts won't.**

**Right: Working from ground level, rather than on a roof, is often safer and easier.**





## Engineering Variables

The information that a custom ground-mount manufacturer will need includes:

- **Maximum design wind speed.** This is the highest wind gust speed probable in 50 years, averaged over a 3-second gust at a height of 33 feet. Because wind speeds vary (they are generally higher close to the coast and at high elevations), this is critical information for an engineer. Maximum design wind speeds can be found in the American Society of Civil Engineers (ASCE) Standard 7-10, "Minimum Design Loads for Buildings and Other Structures." However, your local building authority can provide the wind design speeds they require.
- **Snow load.** Measured in pounds per square foot, the weight of snow on a structure can stack up, depending on your location. Snow can be five to more than 15 times heavier than a PV module, and the rack must hold the additional weight. ASCE Standard 7-10 includes common snow-load values, but your local building authority will provide their requirements.
- **Exposure category.** This is related to wind loading and takes into account the turbulence at the site due to surrounding objects (trees, buildings, etc.). There are three main ASCE categories that relate to ground mounts: Category B (lower wind loading)—dense urban and suburban area; Category C (medium wind loading)—open terrain with occasional obstructions; Category D (higher wind loading)—flat and unobstructed terrain. (Category A refers to "large city centers" with at least 50% of the buildings with heights more than 20 meters.)
- **Site slope.** Again, the engineer will be concerned with the physical dimensions of the rack and the maximum slope the racking can accommodate. You'll need to provide the average slope and slope direction.
- **Soil class.** This is necessary for determining specifics for anchors, which behave differently in different soils. Soil classifications are derived from Table 1804.2 of the *International Building Code*, which classifies five general soil types—type 1: crystalline bedrock; type 2: sedimentary and foliated rock; type 3: sandy gravel and/or gravel; type 4: sand, silt, or clay sand, silty gravel, and clayey gravel; and type 5: clay, sandy clay, silty clay, clayey silt, silt, and sandy silt. If there is a mix of soil types, pick the dominant type. The USDA Natural Resources Conservation Service publishes soil surveys which contain maps and a description of each major soil in the survey area. Your local cooperative extension agent can provide you with maps and help determine your soil type. See [www.csrees.usda.gov/Extension/](http://www.csrees.usda.gov/Extension/) to find your local office.
- **Module type and quantity.** Acquire a specification sheet for your modules for the rack manufacturer, who will need at minimum the number of modules, plus module depth, height, width, and hole layout, to size the rack correctly.
- **Desired tilt angle.** This will be based on your location's latitude and the seasonal variation in solar gain (see "Specifics to Consider" for more details).
- **Ground clearance.** This is the height to the lower edge of the first row of modules (2 feet is typical). This basic design decision should be based on site conditions: potential snow accumulation, ground covering, aesthetics, etc.
- **Number of modules in a string.** This information can help the rack manufacturer design an efficient layout, with strings contained within a row or subarray for less trenching and conduit.



Courtesy Schletter Inc.

Schletter racks are typically used for large, utility-scale ground-mounted installations.

### Rack Details

Ground-mount racks are made of a mix of aluminum and steel poles, rails, and channel attached to ground-anchoring structures—working together to provide the strength to resist live loads (like wind and snow that exert variable uplift and downward pressure) and dead loads (the weight of the rack and modules). While it's possible to scratch-build a ground-mount, it is rarely advisable. The engineering and testing that go into manufacturers' designs take the guesswork out of ground-mounting a PV array, and the end result is likely to be

Zilla racks can use their Helical system, avoiding the use of concrete pier footings.



Courtesy Next Generation Energy

## ground mounts

cheaper, sturdier, longer-lasting, better engineered, and quicker to install than a homemade rack.

Ground-mount manufacturers offer versatile designs for PV arrays, from two modules to upwards of 2,000 modules. The manufacturer typically provides a site-specific engineered design, layout, and prefabricated components, along with a list of what needs to be provided locally. The locally sourced parts will vary according to design—some systems come so complete that only concrete needs to be locally sourced. Although some rack manufacturers

Courtesy Next Generation Energy



In areas with no vegetative growth or snow shed, racks can attach to concrete at ground level.

## Ground-Mount Planning Checklist

### Preliminary

- ❑ **Siting:** Review property lines, shading, setbacks, right-of-ways, or easements; and check for underground utilities.
- ❑ **Civil engineering:** Will grading, storm water runoff mitigation, or environmental reviews be needed? Check with local permitting, planning, and inspection agencies.
- ❑ **Site access:** Is the site accessible to heavy construction machinery if needed?
- ❑ **Accessibility:** Will the array need fencing for security from theft and/or animals, and to comply with NEC 690.31A? Be sure there is sufficient space so the fence will not shade the array.

### Design

- ❑ **Site-specific info:** Catalog wind speed, snow loads, soil conditions, etc.
- ❑ **Electrical interconnection:** Determine distance and route to the interconnection point, and placement of electrical equipment including combiner boxes, disconnects, inverters, and other BOS components.
- ❑ **Orientation:** Choose a tilt for the array that balances maximizing production and maximizing usage of the area (steeper tilts mean rows of modules must be further apart due to interrow shading).
- ❑ **Height:** Consider snow buildup and vegetation growth to determine the minimum height to the array's lower edge.
- ❑ **Layout:** For multiple rows, plan spacing according to shading calculations, access requirements, and trenching routes.
- ❑ **Maintenance:** Plan for dealing with vegetation growth and access to the modules for cleaning.

focus only on larger arrays (20 kW and up), nearly a dozen manufacturers provide smaller array (500 W to 20 kW) solutions, delivering fully engineered mounts with 10- to 15-year warranties.

Ground-mounted PV modules are arranged in one or more rows, in either a landscape or portrait configuration. A common layout for larger arrays is two rows of modules in a portrait configuration, but smaller array layouts vary substantially, depending on the number of modules. Care should be taken when specifying a design to match the number of modules and series strings with the layout to ensure a symmetrical final product with the shortest possible cable and conduit routes.

### Securing the Rack to the Ground

A variety of methods are used to anchor the rack to the ground: poured footings made with concrete column forms; driven steel piles of beam or pipe (or, rarely, wood); “earth screws” (also called “anchors” or “helical piers”) and even ballast (see “Ballast Mounts” sidebar).

Most smaller ground-mounted arrays use concrete footings because no special equipment (like a pile driver) is necessary. As more manufacturers join the industry and R&D accelerates, ground-mount anchor installation options are expanding. For example, Next Generation Energy’s Helical System uses hot roll steel plate and steel tubing to make a sturdy anchor that quickly “drills” into the soil. The anchors cannot be used in hardpan soils or soils with larger than 6-inch rocks. The depth, diameter, height, and spacing of the ground-mount support anchors, as well as the design of the rack itself, will be specified by the rack manufacturer on a site-by-site basis. The manufacturers engineer the design to the most conservative building code standards for the site specifics, so you must provide accurate inputs for the engineer, or the rack design might not be built to withstand the particular environmental conditions of the site, with potentially catastrophic consequences.



# A Ground-Mounted Solution

Down a quiet gravel road in a small community in the piedmont of North Carolina, Joe Gamble and Suzanne Thompson's house often loses utility power during too-common hurricanes and ice storms. Their first priority was PV-powered battery backup for the well pump, but they also wanted to power as much of their residence as possible with renewable energy.

Their home—a geodesic dome—was particularly problematic for a roof-mounted PV system. The multiple azimuths and tilt angles of the curved dome would have meant installing modules at wildly different orientations or with a complicated rack attachment system—not usually a wise PV design decision (although microinverters or module maximizers might help alleviate the energy production aspects of this problem).

The siting focus turned to a field behind the house. But the field had its own issues: it was covered with brush, included a perilously steep western slope, and was bordered to the north by a utility right-of-way and on the south side by a row of evergreen trees.

## Type of Mount

For PV arrays situated in fields like Joe and Suzanne's, there are two choices—pole mount or ground mount. Pole-mounted PV arrays sit atop a heavy, steel pole (usually 6 or 8 inches in diameter) that is anchored in yards of concrete. Ground-mounted racks have multiple smaller supports that secure the array, and usually sit closer to the ground. The slope of their field was too steep for concrete trucks or other heavy equipment, ruling out the pole-mounted solution.

**Poured concrete piers provide solid footing for mounts and BOS components.**



Courtesy Honey Electric Solar



Courtesy Honey Electric Solar (2)

**DPW Solar provided the engineered rack system, which Honey Electric Solar installed on the steep slope.**

Honey Electric Solar designed and installed the 2.8 kW PV system with two, side-by-side ground-mounted DPW Solar racks. Each rack accommodates eight, 180 W Evergreen PV modules that power an OutBack battery backup, grid-tied inverter. The Gamble array was limited to four modules in a series string, due to the module voltage, temperature extremes, and charge controller voltage window. If the strings had been limited to three modules instead of four, it would have meant splitting a string across the two racks.



**Footers were reinforced with rebar and inspected prior to pouring concrete.**

**Cross-bracing keeps the plane of the modules from flexing under wind or snow loads.**







Courtesy Peltz Power

**Compared to roof-mounted arrays, which are typically installed inches above and parallel to the roof plane, ground-mounted arrays have access to greater airflow, resulting in cooler operating temperatures and higher production.**

## Specifics to Consider

Every site is unique, and every mount design will be, too. For example, an array located in an area that receives heavy snowfall should have ample ground clearance so that snow can slide off, accumulating below without shading the modules.

In addition to site-specific considerations, the tilt angle of the array is a key factor. While adjustable legs are a common option with many ground-mounts, it isn't nearly as easy as adjusting a pole-mounted array. Most pole mounts are balanced and have a single point of tilt adjustment, which a person can handle alone. Ground-mounted racks have multiple bolts, and the weight of the modules is resting on legs that have to be adjusted simultaneously or each leg a little at a time. This means at least two people can be needed for adjustments, or the process becomes arduous.


For a design starting point for a single-row, grid-tied array—that most commonly has a fixed tilt—use NREL's online PVWatts calculator to find the angle that gives the highest possible annual energy (kWh) estimate for your site. Deciding on a fixed tilt angle for the array can be tricky if you're off-grid or have multiple array rows within close proximity.

For setting the tilt of off-grid arrays, consider when loads are heaviest or the fewest sun-hours are available and choose an angle close to perpendicular to the sun's rays for that time of year. If no set tilt angle can meet the consumption demand year-round, then calculate what fixed tilt will most likely reduce generator run time via a comparison of seasonal production at different tilts versus seasonal loads.

For ground mounts with multiple rows in close proximity, the choices become even more complicated. An array set at lower tilt angles means interrow spacing can be narrower, since the shadow cast by each row is shorter—and more rows can fit into a smaller footprint. The trade-off is that as module tilt decreases below the optimum, array energy production

will decrease as well. A good starting point that balances the two goals for a multirow array is to set the tilt at latitude minus 10°. Manufacturers can assist in calculating interrow shading and spacing where necessary.

Positioning the inverter(s) and other balance of system (BOS) components is another critical design decision, especially when the goal is to keep voltage drop to a minimum. Higher voltages with lower currents allow smaller wire sizes, which means money saved. For high-voltage, grid-tied residential arrays using string inverters, the DC voltage will nearly always be higher than or about the same as the inverter AC-side voltage—which means keeping the longer runs of conduit and wire on the DC side of the inverter can be a good design decision. The

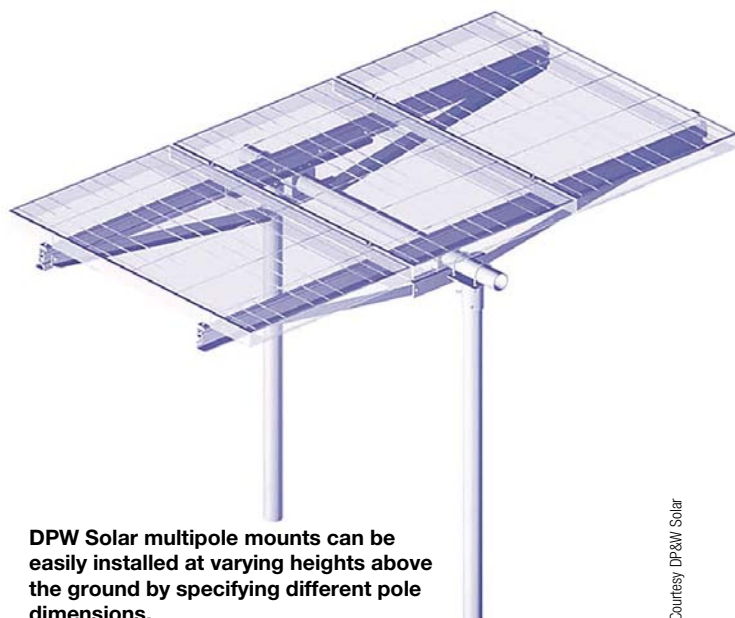

**DPW Solar multipole mounts can be easily installed at varying heights above the ground by specifying different pole dimensions.**

Courtesy DP&W Solar



## Ballast Mounts: Not Just for Flat Roofs Anymore

Ballasted mounting structures have traditionally been used on flat commercial-style roofs, where penetrating the roof surface is undesirable or impossible. Instead, a heavy ballast, often concrete blocks, sits in trays attached to the mount to firmly hold the array in place. Ballast weight is based on the site's design wind speed and other factors that affect the wind loading and pressure on the system. The building also must be structurally sound to support the added ballast and system weight.

Ballasted mounts are now being used on the ground, too. In places like brownfields that have contaminated soil, or landfill sites that have been capped, a ballasted system can be the only way to secure an array without penetrating the soil—turning a previously unusable site into a clean energy generation plant! Ballasted systems also work well in places where the soil is extremely rocky. For environmentally sensitive sites, a ballasted system can be more easily moved. Even abandoned parking lots can accommodate ballasted PV arrays without needing to tear up the paving. Ballasted ground mounts do not accommodate sites with more than a 5% slope.

The ballast used for ground-mounted arrays is locally sourced, and can be sand bags, paver blocks, or a precast concrete form specifically designed for the mount. Depending on the ballast racking system used, the site may not require heavy machinery or concrete pouring, and may require only minimal surface prep during installation.



Courtesy Tom Barnes

**Concrete pavers or other blocks can be used to keep a ground-mounted array from being lifted by wind.**

positioning of array BOS components will directly impact where conduit will be buried and how the array can be accessed for maintenance.

### Code & Maintenance Considerations


Section 690.31A of the 2008 *NEC* specifies that PV wiring should not be readily accessible. For ground and pole mounts, that means either containing it in a raceway (which is possible when the modules have junction boxes that accommodate conduit) or by other means—the usual solution being locating the array behind a fence that does not shade the array. A fence can be a good choice for other reasons, such as in high-profile areas where theft or vandalism might be an issue. Several ground mounts have wire-management channels, into which PV wires can be safely tucked. These channels are either integrated into the design or offered as an option. These are not frequently UL-listed as a raceway, so the authority having jurisdiction over the installation might question their use for wire management.

The grounding for ground-mounted arrays also should be carefully considered. *NEC* Section 690.47D requires grounding electrodes connected directly to the array structure at the location of the ground mount. Exposed, non-current-carrying metal parts that may become energized in a fault situation, like module frames and rack rails, also must be grounded

and connected to the grounding-electrode system. It is best to verify your grounding techniques with your inspector beforehand.

One of the biggest challenges for ground-mounted systems is keeping the surrounding area free of array-shading vegetation. Solutions include gravel, landscape fabric, and mowing. Sheep have been successfully used to keep the area around the array clear (but don't use goats, which will climb on the array and try to chew on conductors)! Mowing or

**All rack manufacturers should be willing to supply custom drawings of their engineered systems. If needed for the local inspector, stamps from professional engineers can be provided.**

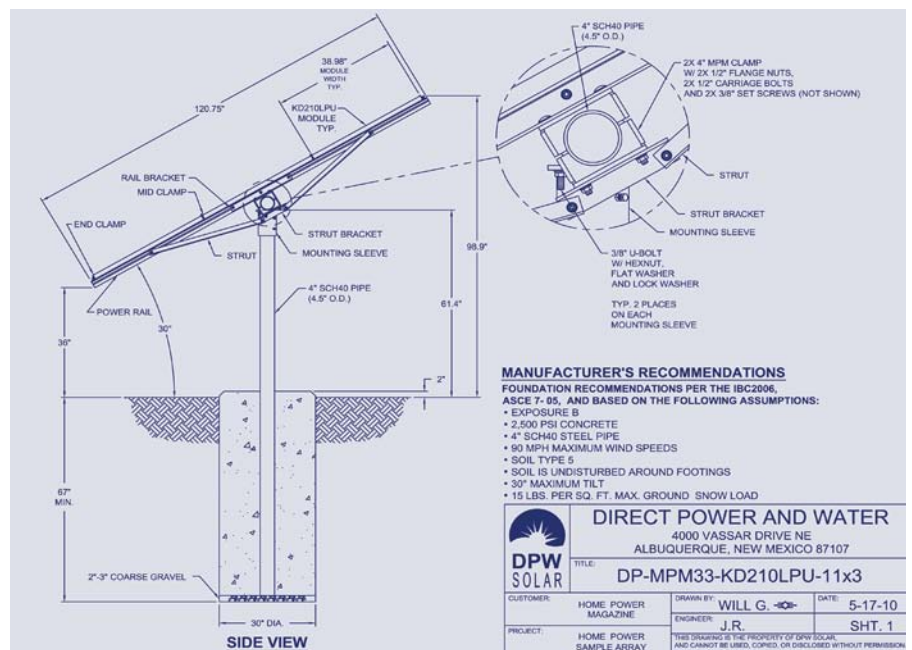

string trimming should be done carefully, as thrown rocks can damage the panels. Another factor to consider is the permanence of the installation—some sites, especially in land trusts or farmland, require a plan for future removal of concrete piers and associated structures.

### Finding a Manufacturer

Some manufacturers design mounting structures only for “larger” arrays or split their product lines into residential, commercial, and utility-scale solutions. If in doubt, check their Web site, and get in touch with them. A manufacturer should be easily accessible by phone or email, so it is worth the trouble to call a few and discuss upcoming projects to get a feel for how responsive they will be.

### Access

Rebekah Hren ([rebekah.hren@o2energies.com](mailto:rebekah.hren@o2energies.com)) is a licensed electrical contractor and NABCEP-certified PV installer living in Durham, North Carolina. Rebekah teaches PV system design and installation classes, and co-authored *The Carbon-Free Home*, a book on residential energy efficiency retrofits. Her newest book, *Solar Buyer's Guide for Home and Office*, will be available in October.

#### Manufacturers:

AEE Solar • [www.aeesolar.com](http://www.aeesolar.com)  
Applied Energy Technologies • [www.aetenergy.com](http://www.aetenergy.com)  
Conergy • [www.conergy.us](http://www.conergy.us)  
DPW Solar • [www.power-fab.com](http://www.power-fab.com)  
HatiCon Solar • [www.haticonsolar.com](http://www.haticonsolar.com)  
Hilti • [www.hilti.com](http://www.hilti.com)  
Next Generation Energy • [www.zillarc.com](http://www.zillarc.com)  
Panel Claw • [www.panelclaw.com](http://www.panelclaw.com)  
Professional Solar Products • [www.prosolar.com](http://www.prosolar.com)  
Solar Flexrack • [www.solarflexrack.com](http://www.solarflexrack.com)  
SunLink • [www.sunlink.com](http://www.sunlink.com)  
Unirac • [www.unirac.com](http://www.unirac.com)



**solar powered**  
**Differential**  
**temperature controller**  
**\$120.00** For 12 or 24 Volt DC pumps  
*adjust differential 5-32F*  
*adjust max cut-off 80-200F*  
Click to buy: [www.ArtTecSolar.com](http://www.ArtTecSolar.com)



**SOLAR**  
**ONE®**

**Batteries with HuP® technology**



Solar-One Batteries have a 10 year factory warranty with FREE cell replacement for 7 years.

Solar-One Batteries have been in RE service for more than 13 years with over 99% customer satisfaction.

Solar-One Batteries incorporate the patented and proven HuP technology with the thickest positive plate (0.310") in the Renewable Energy Industry.

Solar-One Batteries come complete with solid copper buss bars, stainless steel fasteners, and terminals with more than 9 square inches of surface area.

Solar-One Batteries are available in 9 sizes from 845 A/H to the **NEW** 1990 A/H at the 20hr rate. Many sizes in stock. FREE shipping (lower 48 states).

Solar-One Battery users described the Solar-One as: "A Great Value", "Bullet Proof", "Reliable".

Solar-One Batteries are assured fresh due to a single, modern, and centralized distribution center with a continuous high flow of product.

Contact your Renewable Energy professional or Northwest Energy Storage at 800-718-8816 or [www.nwes.com](http://www.nwes.com)



- Company X  
Est. 199X



- Tianwei  
Founded in 1958



- Company Y  
Since 200X



## Which one to choose?

Tianwei, with over 50 years history, can "comfortably" take care of your 25 year quality requirements.

Tianwei is wholly-owned by China South Industries, a Global Fortune 500 Enterprise, and is a major fully integrated crystalline PV supplier.

Tianwei New Energy is your ideal choice.

**Together, we bring power to future.**



**heliodyne**  
SOLAR HOT WATER

**STOP  
CALL-BACKS  
AND INCREASE  
REVENUE  
NOW**

With Heliodyne's "Plug & Play" designs, you'll see how easy it is to install our solar hot water systems. With all the benefits of exceptional reliability and durability, you'll enjoy fewer call-backs along with higher profits. Plus, you can even install remote monitoring for system performance notifications. Since 1976 we've been a trusted leader, so call us or log on today, and you'll be glad you saw the signs.



For more information  
call 1 (888) 878-8750,  
or go online for more info at [www.heliodyne.com](http://www.heliodyne.com)

EXCELLENCE  
BY DESIGN™

## The Best Solar Pumps Under the Sun

- > Solar water pumps and power panels
- > Inverters, charge controllers and batteries
- > Reliable grid tied & off grid systems
- > Experienced sales & design



"I am in full support of Innovative Solar Solutions' acquisition of Conergy/ Dankoff Solar Pumps, and their revival of the Dankoff trade name. I am confident that they will provide excellent wholesale service." – Windy Dankoff

866.856.9819 [InnovativeSolar.com](http://InnovativeSolar.com)

**superbrightleds.com**



**Many Types of 12 Volt LED Bulbs and LED Products  
All Items In Stock and Available for Purchase Online**

10% Off Online Orders - Promo: H610M  
Super Bright LEDs Inc. St. Louis, Missouri - USA [superbrightleds.com](http://superbrightleds.com)



## 50kW Turbine



The Wind Distributor

TALCO Electronics is the only wholesale distributor that specializes in small and medium wind systems. We offer industry leading dealer tools, training, support, & service. We offer turnkey wind turbine systems ranging from 200 to 50,000 watts. TALCO Electronics is North America's leading wholesale distributor for Endurance Wind Power, Proven Energy, Gaia-Wind, Raum Energy, Southwest Windpower, SMA, & Stark Foundations.

TALCO Electronics cares about its dealers and develops a personal relationship with each dealer. We help our dealers with mentored installations, sales tools, financial and wind analytics. This allows our dealers to close more sales and perform quality installations.



Southwest Windpower  
Renewable Energy Made Simple



Call 877.448.2526 or visit us at [www.talcoelectronics.com](http://www.talcoelectronics.com)

## Power Predictor

*The Power Predictor is a low cost device that measures wind speed, direction and solar energy at any location*



The Wind Distributor

**The Power Predictor answers the questions  
Comprehensively, Quickly and Easily**

- Assesses the suitability of your site for renewable energy, specifically solar and wind.
- One low cost device provides you with actual, real time solar and wind data at your site as opposed to the modelled data provided by most suppliers
- Provides you with a customised Power Report for your site including annual energy generation and carbon saving estimates
- Tells you how much money you could save by installing a wind turbine or solar panels at your site, together with the costs and payback periods of the best products available

ONLY  
**\$299**



Call 877.448.2526 or visit us at [www.talcoelectronics.com](http://www.talcoelectronics.com)

# GRID-TIED

by Flint Richter

# ...with Backup!

## WOULD BATTERIES BENEFIT YOUR GRID-TIED SYSTEM?

Most grid-tied solar-electric systems are “batteryless” and require the utility grid to function. The grid provides a “signal” for a grid-tied inverter to follow, creating an AC waveform from the DC PV system output. Once that signal disappears or goes too far out of voltage or frequency specifications, the inverter stops operating. That is the most efficient way to produce PV-made energy—more watts can be converted.


Conceptually, a PV array could produce useful energy any time the sun shines. So why can’t we use it if the grid does not operate? It’s because a PV array is a constant-current energy source—it cannot cut back or increase the energy available depending upon how much the household needs at

any moment. For example, there might be a fridge motor that draws 9 amps while running. A PV system putting out 9 A could keep up with that, except for one problem. When the fridge starts running, the motor surges to possibly double or triple its running amperage. Since the PV system is limited to 9 A, it can never start the motor.

When hooked up to the utility, this same PV system has the grid available to make up for any deficiencies, like during appliance start-up surges. The grid also provides a place to go for any excess energy produced by the PV-powered home.

Including a battery in the system adds a source of energy that can vary according to the needs of the home. Special battery-based, grid-tied inverters are designed to disconnect

## Basic Energy Flow: Grid-Tied with Battery Backup

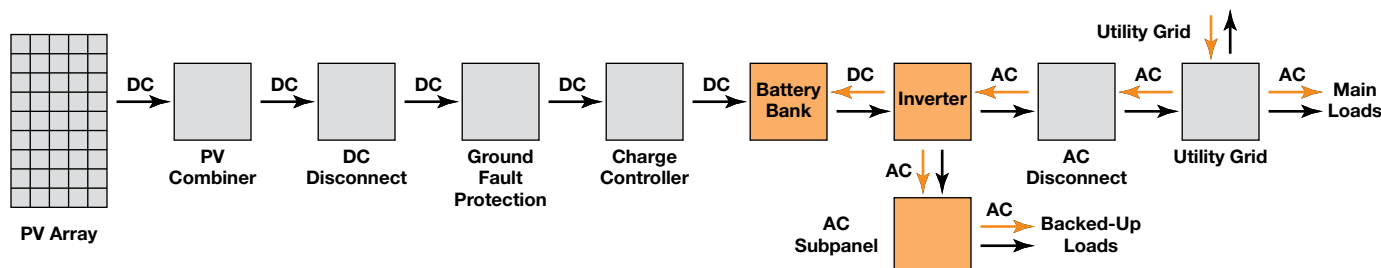



from the grid, instantaneously switching internally to draw needed energy from the battery instead of the grid. These inverters still disconnect themselves from the grid when the grid goes down, so that they don't inadvertently energize the grid while utility workers are working on it—a potentially shocking hazard.

High frequency or long durations of electrical outages are the most common reasons to have battery backup. Many rural homeowners want battery backup with their systems because they live with a low-quality grid or have affecting circumstances—trees near power lines, a long power line extension, wind or snowstorms—that make outages more frequent or of longer duration.

If you do suffer consequential outages, or if there are appliances that absolutely must run all the time, you'll need backup energy during an outage. You may have medicine or food that needs to be kept cold; lights and computer equipment for work; an oxygen generator for your health; radios and TV for access to news; or a lift for alter-abled access.

A detailed worksheet listing loads and their usage is necessary to size a battery-backup system (see “Sizing a Grid-Tied PV System with Battery Backup” in this issue). Any improvements in load efficiency that can be made prior to sizing the system will reduce costs. Sizing a battery backup system usually takes several attempts—you need to weigh the cost of backing up loads with the loads' importance, while paring down the list or increasing efficiency to stay within your budget.

Battery backup system sizing is much more critical than grid-tied sizing, so details are a must. If you size a grid-tied system too small, the extra energy needed comes from the grid—no problem, except for a higher bill. If you size

**Besides a battery-based grid-tied inverter and batteries, these systems require a charge controller, new load panel, and various additional components, driving the total cost up 20% to 40%, while reducing overall system efficiency.**



Courtesy Honey Electric Solar

## Outages Infrequent? Consider Unplugging

Most urban homeowners rarely experience power outages. And when they do, it's typically for only a few minutes. Instead of spending money on a battery-based system that would be rarely, if ever, needed, consider the “candle and bottle of wine” plan: a potentially fun respite from being “plugged in” all the time.



your battery backup system too small, you may run out of electricity during an outage, defeating the point of having battery backup.

A typical *batteryless* grid-tied PV system's cost is \$6 to 8 per rated watt. A grid-tied system with battery backup can cost \$10 or more per watt, because of adding batteries and the extra equipment needed to charge them. The total size of the critical loads and duration of outages dictates the size of your battery, inverter, and charging source (PV array, wind generator, micro-hydro generator, etc.)—and your system's cost. Rewiring your service panel adds another cost, since backed-up loads must be separated from non-backed-up loads and placed in a dedicated service panel. This work can lead to remodeling, further adding to the labor and cost involved.

### System Operation

A battery-based grid-interactive system requires a specialized inverter. Most of the time, the inverter operates in its grid-tied function, converting DC energy (from a PV array, for example) into grid-quality AC energy that can

## Maintenance, Environment & Efficiency

Photovoltaic systems are very reliable, and batteryless systems are nearly maintenance-free. Adding batteries increases maintenance costs and responsibilities. Flooded lead-acid batteries—still the most common energy-storage medium—require checking electrolyte levels periodically to see if distilled water must be added. Sealed batteries require no electrolyte checks, but still have connections and terminal posts that must be periodically inspected and cleaned of corrosion, as is the case with any battery.

Batteries also come with environmental issues that you may want to consider—mining, chemical manufacturing, and spills. The owner's responsibility continues beyond the batteries' life cycle, since this potentially hazardous element must be disposed of properly or recycled into new batteries. There are battery recyclers that reuse or recycle all parts of a battery: lead plates, electrolyte, and plastic case.

A consequence of adding batteries to a grid-tied system is a drop in overall system efficiency. A *batteryless* grid-tied inverter will be from 90% to 97% efficient at turning the available PV input power into grid-quality output—the bulk of most tested inverters hover around 95% efficient. Introducing batteries drops the inverter efficiency to about 92%.

In addition, there are battery inefficiencies. A lead-acid battery is about 80% efficient, with 20% of the energy wasted as heat during the battery's chemical reactions. Better efficiency can be had by charging and discharging a battery slowly; quick charging and discharging means lower efficiency. But once the battery is full, almost all of the energy from the inverter is directed to the grid or loads, although a little energy will be used to keep the battery at float level (full).

With the inverter sending energy to the grid, the main efficiency difference between battery-based and batteryless systems is how well the inverter processes energy from a renewable source and delivers it to a load. When the grid is down, the battery efficiency comes into play during the cycle of charging and discharging the battery to power your backed-up loads.



**Even sealed batteries require maintenance and have a shorter life-span than most other components in a system, which come at an efficiency and economic cost.**

Courtesy Sun Xtender

be consumed on-site or—if the loads do not use all the energy—exported to the grid. The inverter's second function is as a backup power supply, which handles battery charging when the grid is available and seamlessly switches to battery backup mode when grid power drops out.

In the more-common grid-interactive mode, the inverter is exporting energy from the charging sources to the household loads and any excess energy is pushed on to the grid. If the home consumes more energy than the charging sources can supply, that energy is pulled from the grid. Specifically, if the backed-up load center demand exceeds what the charging source can supply, the inverter will pass grid electricity through its internal transfer switch to its output circuit (i.e., to the separate backed-up loads subpanel).

During a utility outage, the inverter switches to converting DC from the battery to AC for the backed-up loads panel. The means of feeding the grid during grid-tied mode is disconnected when the grid is down, and all loads in the main panel are de-energized. Once grid power returns, the inverter will wait five minutes to make sure the grid is stable and then switch the backed-up loads panel from inverter power to grid power and start recharging the battery with whatever power sources are available—grid, solar, etc. Then the inverter resumes sending excess energy to the grid.

When the grid is out-of-spec but not out, the inverter will disconnect from the utility and send power to the backup panel. The loads inside the main panel will continue to run as long as the loads are getting enough voltage from the grid. Inverters have a very tight spec and may disconnect from the utility even when there isn't a major problem. In this scenario, the inverter wouldn't be able to send power back to the grid if the PV array was producing excess power.

While the complexities and design factors for a battery backup system may be daunting, the rewards can make up for it. Few battery-backup customers ever say they regret the system choice—while some *batteryless* grid-tied customers fantasize about using their appliances while the grid is down. Usually, the financial outlay for a battery-based system is the determining factor. These systems, like all home RE systems, are becoming more affordable thanks to falling module and other PV equipment prices—and the generous 30% federal tax credit that even applies to battery-based systems.

### Access

Flint Richter (flint@rockygrove.com) lives and writes off-grid in Arkansas' Boston Mountains. He is a partner and NABCEP-certified PV project manager with Rocky Grove Sun Company and a contracted instructor for Solar Energy International. He is teaching his young daughters the difference between a solar module and a solar panel.







# NEED TRAINING?

## DC POWER SYSTEMS

trains more installers than any other solar distributor nationwide.

DC Power Systems is a full service distributor of renewable energy solutions. Working with our national network of qualified dealers and installers, we design and supply solar electric and wind power systems for business, residential and government applications. We offer training programs for renewable energy dealers and contractors with support from our manufacturing partners. The training sessions include seminars at supplier facilities, at our headquarters in Northern California, and at various locations across the country.

**VISIT US AT SOLAR POWER IN LOS ANGELES- BOOTH # 3945!**

[WWW.DCPOWER-SYSTEMS.COM/TRAINING](http://WWW.DCPOWER-SYSTEMS.COM/TRAINING) - 800-967-6917 - [training@dcpower-systems.com](mailto:training@dcpower-systems.com)



**SHARP**  
solar electricity



# THERMOMAX

## SOLAR WATER HEATING

Commercial • Residential  
Solar Radiant Floor

### 30 YEARS OF CONTINUOUS IMPROVEMENT

Save up to 80% on heating bills  
All weather performance  
Fast installation • Low maintenance



Photo courtesy of Power Trip Energy

### NEW MAZDON HP 200 DESIGN BENEFITS



Temperature  
limiting  
condensor

Heat pipe technology

Dry & click in tube to  
header connection

Absorber  
plate vacuum  
contained

Deepest vacuum  
insulation  
@  $10^{-6}$  mbar

Large barium  
oxide getter for  
long-term vacuum  
protection

Hail tested  
1" at 50 MPH

Toll-free 1-888-923-9443  
[patrick@solarthermal.com](mailto:patrick@solarthermal.com)  
Ask about Dealerships

**solarthermal.com**



Wattsun Solar Trackers

### Residential

Single & Dual-Axis Azimuth  
Series Trackers mount over  
3 kW of photovoltaic  
modules.

### Commercial

Fixed-Tilt Azimuth Series  
Trackers mount up to 7kW

Horizontal Linear Axis Trackers  
Over 250 kW of PV per drive motor  
Engineered for multi-MW  
PV Power Plants

ARRAY TECHNOLOGIES, INC  
phone: 505-881-7567  
fax: 505-881-7572  
[WWW.WATTSON.COM](http://WWW.WATTSON.COM)

Proactively building active solar  
trackers since 1992  
Wattsun Trackers are manufactured in the USA

# GeoBulb®

LED Lighting by C.CRANE

## LED LIGHT SAVES POWER

### NEW! GeoBulb® 3 5-Year 24/7 Warranty

- Only Uses 7 Watts!
- Even Brighter Than Before – Quality Light with Longer Life
- Best Replacement for Incandescent and CFLs
- 120 Volt • No Mercury or Lead
- Available in Cool White, Soft White, and Warm White

### NEW! GeoBulb® MR16 5-Year 24/7 Warranty

- Only Uses 3 Watts!
- Equivalent to 20 Watt Halogen
- 12 Volt AC/DC • No Mercury or Lead
- Available in Cool White, Warm White



C.CRANE

800-522-8863 • [GeoBulb.com](http://GeoBulb.com)



# What is the SunWize difference?



***"SunWize consistently goes above and beyond for us."***

*"Mark Paddison always goes the extra mile, and sets the standard for what an account manager should be. He actually came to one of our job sites to help resolve an issue we had with a manufacturer. Whether helping to solve problems, or providing proactive communication, he's consistently working with us to make sure our projects run as smooth as possible. We have been a SunWize customer since 2003 and each experience keeps us wanting to go back."*

**James Albert**

*ISI Solar, New City, NY*

**Visit [www.sunwize.com/difference](http://www.sunwize.com/difference) and find out how the SunWize difference can help your business be successful.**

ISI Solar  
18 kW grid-tie  
solar electric system  
Ardsley, NY



**SHARP**®



**SunWize**

**Reliable People ::: Reliable Products ::: Reliable Power!®**

©2010 SunWize • 800.817.6527 • [www.sunwize.com](http://www.sunwize.com)

# Sizing a Grid-Tied PV System ...with Battery Backup

by Flint Richter

A professionally installed grid-tied PV system with battery backup using the Schneider (Xantrex) XW inverter and BOS package, with a custom battery box.

Once the decision has been made to include batteries in your grid-tied system (see “Grid-Tied...with Backup!” in this issue), next is estimating the backed-up loads’ energy consumption, selecting the inverter, sizing the battery bank, and considering other balance-of-system (BOS) components.

System sizing starts with the loads, which determine system components and cost. Sizing a simple batteryless grid-tied system starts with a year’s worth of household energy use data (usually from electric bills) and a budget (see “Sizing Batteryless Grid-Tied PV Arrays” in *HP138*). Sizing the PV array (or other RE source) of a battery-based grid-tied system is done similarly, but sizing the inverter and battery bank requires more information and calculation.

## Estimating/Measuring Backed-Up Loads

If you want a battery-based system, you’ll need to decide what loads will be backed up and how long you need them to operate.

Nameplate ratings—volts, amps, and possibly watts—are printed on most appliances. Remember: amps (A) × volts (V) = watts (W). Watts is an instantaneous measurement of how much power is needed (or produced) at a given moment. You’ll need to know how much energy (kWh or Wh) your loads use while operating over a period of time. Multiplying watts by the number of hours the load runs gives you its

energy use in watt-hours (Wh) per day—then dividing by 1,000 will translate it to kWh.

Although nameplate ratings can be used for system sizing, they may lead to overestimating a load’s power needs, since amp ratings are sometimes given for surge peaks—not continuous draw. A more accurate way to measure a load is with a watt meter (see “Beyond Your Utility Meter” in *HP138*). These tools measure volts, amps, watts, and cumulative kWh for each load. Measuring each load you’re considering for backup will provide a better foundation for system sizing.

## Inverter Sizing

The inverter in a grid-tied battery-based system must be sized to do two things: power all of the backed-up loads simultaneously and pass the energy from the renewable sources (PV array, wind generator, etc.) to the grid. To calculate the inverter power rating, sum the total backup loads. If surge loads (pumps, compressors, induction motors) are anticipated, the inverter should be sized to also handle the maximum combined surge loads. Most inverters can handle a surge twice their rated output for a few seconds. If more power is needed than a single inverter can supply, you can stack the outputs of multiple inverters to increase the total connected power and surge capabilities, or multiple inverters can separately feed separate loads.




The voltage and frequency of the inverter must also match the loads. Inverters for the United States are available in 120 and 240 VAC output at 60 Hz. If you only need to back up 120 V loads, then a 120 V inverter will be your most economical choice. However, purchasing a split-phase, 120/240 V inverter (or stacking two 120 V inverters for 120/240 V output) gives the flexibility to power both 120 and 240 V loads.

The second inverter selection factor is the ability to send renewable-made energy to the grid. If you have a PV array rated at 4,000 W, the inverter needs to be able to process the full amount. While it is true that the PV array will produce less power under normal operating conditions (due to module heating, dust/dirt, wiring inefficiencies, etc.), there are conditions (cold temperatures and clear skies) when the array can produce full power. Select an inverter that will handle the larger of the two factors: Array output and maximum combined backup loads.

### Battery Bank Sizing


After sizing your inverter to fit the loads and RE sources, next size the battery bank to power the loads for a given amount of time, making sure to match the battery and inverter's DC voltage.

Begin battery bank sizing by determining how many days you want to power your backed-up loads without a charging source (days of autonomy). Since the grid will be your primary energy source, for this calculation, you only need to consider the amount of time the grid won't be available. Using historical information, you can estimate the average length of time your site experiences utility outages. You can also add in a safety factor to account for extreme situations. In arriving at a number, assume that there won't be a source of energy to recharge the batteries. Finally, if the days of autonomy exceed three, consider adding an engine generator as a third energy source. This will help keep overall system costs down, and result in a more reasonably sized and better utilized battery.

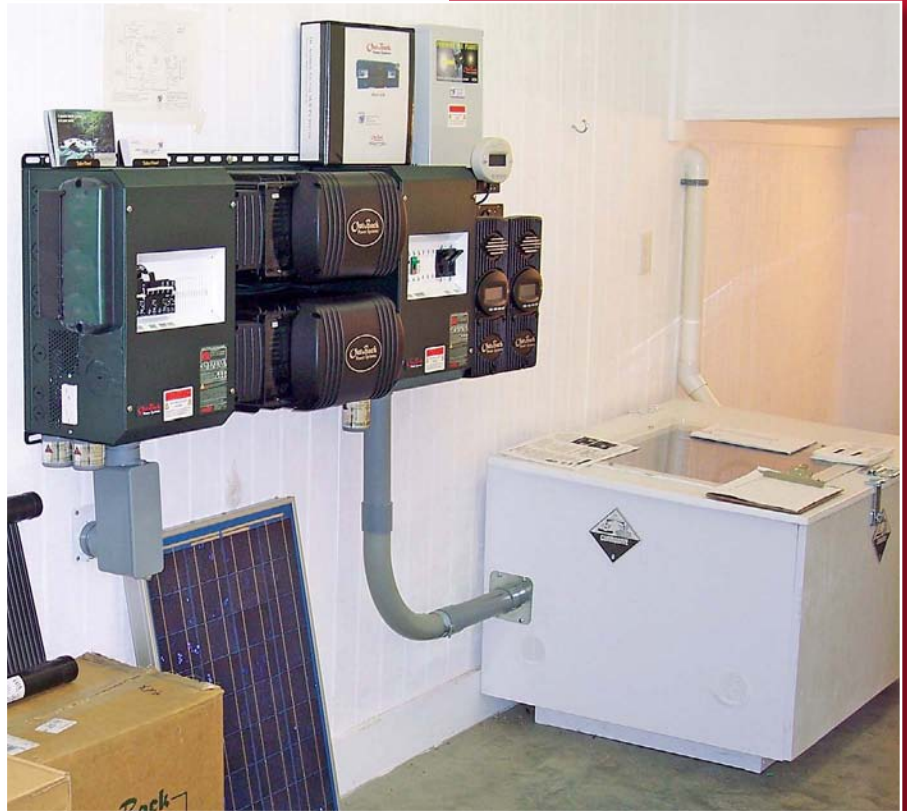

**Above:** Two stacked inverters are the core of this OutBack system, which integrates charge controllers and other BOS components.

**Below:** An SMA America Sunny Island system uses AC coupling to integrate battery charging with a second batteryless inverter.

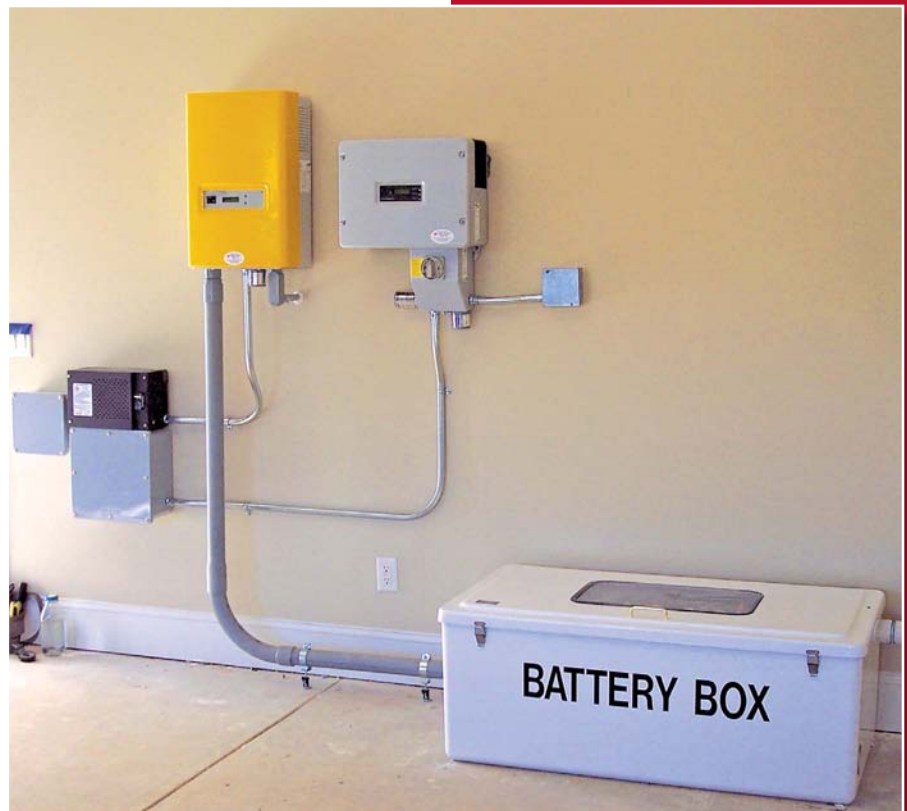

Courtesy Honey Electric Solar (2)

# Available Battery-Based

Three manufacturers dominate the grid-tied, battery-backup inverter market: OutBack Power Systems, Schneider Electric (formerly Xantrex), and SMA America. Each company offers an inverter—some with different AC outputs or in different configurations—that is listed to UL Standard 1741 for grid interconnection and has battery-based capabilities.

## OutBack Power Systems

OutBack Power experienced early adoption in the off-grid market because its equipment had features and operations not yet filled by other inverter manufacturers. It soon became a player in the grid-tied with battery backup market niche with its GTFX, GVFX, and, more recently, SmartRE products.

The GT stands for grid-tie; the GV is the higher-powered, vented model—both are variations of the rugged off-grid FX inverter. The sealed GT versions are available in 24 V, 2.5 kW and 48 V, 3 kW models. The vented versions come in 24 V, 3.5 kW and 48 V, 3.6 kW models.

All versions have single-phase 120 V output. Two G-series inverters can be “stacked” for 120/240-volt split-phase output. OutBack also produces AC and DC FLEXware panels that hold all BOS components, overcurrent devices, shunts, and bypass breakers. There are many versions of OutBack-inverter-based power panels that are pre-assembled, and tested to save labor costs and on-site assembly. At least one third-party manufacturer makes power panels that integrate with the FX series of inverters.

OutBack’s newest product—the SmartRE—provides easy installation with a quality battery backup grid-tied system. The SmartRE incarnation of the GTFX includes two AC inputs—much like the Xantrex XW. The combination of grid and backup engine generator inputs make this a very flexible unit. All four of the SmartRE models are 48 V with 2.5 or 3 kW and either 120 V or 120/240 V versions.



Above: GTFX/GVFX inverter.

Left: SmartRE inverter.

## Grid-Tied Battery-Backup Inverters

Company	Model	Power	Battery Voltage (VDC)	Surge Power <sup>1</sup>	Output Voltage (VAC)	Stacking	Multiple AC Inputs	Generator Control	Integrated Battery SOC Meter	Integrated Charge Control
<b>OutBack Power</b> www.outbackpower.com	GTFX2524	2.5 kVA	24	4.8 kVA	120	Up to 2	No	No	No	No
	GTFX3048	3.0 kVA	48	4.8 kVA	120	Up to 2	No	No	No	No
	GVFX3524	3.5 kVA	24	5.0 kVA	120	Up to 2	No	No	No	No
	GVFX3648	3.6 kVA	48	5.0 kVA	120	Up to 2	No	No	No	No
	SmartRE 2500-120	2.5 kVA	48	4.8 kVA	120	N/A	Yes	Yes	Yes	Yes
	SmartRE 2500-120/240	2.5 kVA	48	4.8 kVA	120 / 240	N/A	Yes	Yes	Yes	Yes
	SmartRE 3000-120	3.0 kVA	48	5.0 kVA	120	N/A	Yes	Yes	Yes	Yes
	SmartRE 3000-120/240	3.0 kVA	48	5.0 kVA	120 / 240	N/A	Yes	Yes	Yes	Yes
<b>Schneider Electric</b> www.schneider-electric.com	XW4024	4.0 kW	24	8.0 kW	120 / 240	Up to 3	Yes	Optional	LED display	No
	XW4548	4.5 kW	48	9.0 kW	120 / 240	Up to 3	Yes	Optional	LED display	No
	XW6048	6.0 kW	48	12.0 kW	120 / 240	Up to 3	Yes	Optional	LED display	No
<b>SMA America</b> www.sma-america.com	Sunny Island 5048US	5.0 kW	48	11.0 kW	120	Up to 4	No	Yes	Yes	Yes

<sup>1</sup> Surge duration: OutBack & SMA America: 5 seconds; Schneider Electric: 10 seconds.



# Grid-Tied Inverters

## Schneider Electric

The company has a long history of reliable products that were the foundation of battery-based RE equipment. Its grid-tied with battery backup inverter is the XW, replacing the old workhorse SW, which was one of the first grid-tied with battery backup inverters.

The XW is a sine-wave inverter that offers split-phase (120/240 AC) voltage output and a 200% surge capacity for 10 seconds. The company offers 24 V, 4 kW; 48 V, 4.5 kW; and 48 V, 6 kW models. Any of these models can be stacked with one or two other inverters of the same type to double or triple the output capabilities. All models can accept two AC inputs—the first AC input will typically be the grid; the second may be a backup engine generator. Adding a generator can minimize battery and PV costs, since you can design for fewer days of autonomy and a smaller charging source.

The XW can be purchased with a complete integrated AC/DC power distribution panel for up to three parallel inverters and four XW MPPT 60-150 PV charge controllers.

**A Schneider XW inverter and power distribution panel.**



Courtesy Schneider Electric



Courtesy SMA America

## SMA America

SMA America's Sunny Island is an off-grid inverter that can function as a battery backup grid-tied inverter—but that's not all. It can be installed with the company's Sunny Boy batteryless grid-tied inverter, allowing the Sunny Boy to continue to produce power even while the grid is down.

One of the Sunny Island's outputs is wired into the same subpanel containing the grid-tied inverter's output and all of the backed-up loads. The other Sunny Island output backfeeds a breaker in the main load center. When the grid is present, the Sunny Island can charge the batteries while the grid-tied inverter "sells" power to the grid. If the grid goes down, the Sunny Island disconnects from the main load center and starts to invert battery power to the backup panel. The grid-tied inverter sees the AC, and the Sunny Boy acts as if the grid is still present, continuing to produce power. The Sunny Island prioritizes powering the backed-up loads with the grid-tied inverter's output first and will then supplement with inverted battery power if needed.

The Sunny Island output is 120 V, so if your backed-up loads need 240 V or the output of your Sunny Boy inverter is 240 V, you will need two Sunny Islands or an 120 to 240 V autotransformer between the Sunny Island and backed-up subpanel.

The Sunny Island system may not be the most cost-effective way to install a battery-backup grid-tied system—but it is the only product that is engineered to allow an existing grid-tied batteryless inverter system to add battery backup.

**SMA America's Sunny Island inverter.**

## Flooded or Sealed Batteries?


Most batteries installed today are lead-acid batteries—either flooded or sealed. Flooded batteries are used extensively in off-grid situations, when frequent cycling is part of a battery's duty and maintenance is a given. To get maximum life from this type of battery, it's important to monitor electrolyte levels and state of charge, and run regular equalization charges.

Batteries in grid-tied systems will rarely cycle and require far less maintenance, so sealed lead-acid batteries can be a good fit. Compared to their flooded counterparts, there's also very little gassing, yet batteries should still be contained, kept out of living spaces, and have sufficient ventilation. Sealed batteries are more expensive, must not be overcharged, and have a shorter life expectancy, but their low maintenance and ability to handle the small number of cycles they will see in service still makes them an appropriate choice.


Batteries can only supply a limited amount of energy before they are depleted. Some deep-cycle batteries may be discharged up to 80% for about 2,000 cycles, or at 50% for about 4,000 cycles. A battery-based backup power system may undergo 10 cycles per year—often less. So sizing a battery based on an 80% deep discharge rate is appropriate for this type of infrequently cycled system. (For an off-grid home that cycles batteries often daily, a more conservative approach may be necessary.)

Once you know the desired days of autonomy, possible battery discharge level, and the energy requirements of your loads, you can size the battery. Start with the total Wh per day for backed-up loads and divide by 0.85


## Battery String-Sizing Options

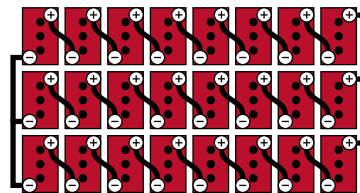

**ACCEPTABLE**  
**Three Series Strings:**  
 Twenty-four 6 V,  
 350 Ah batteries  
 in three strings of eight,  
 for 1,050 Ah total  
 at 48 V



**BETTER**  
**Two Series Strings:**  
 Sixteen 6 V,  
 500 Ah batteries  
 in two strings of eight,  
 for 1,000 Ah total  
 at 48 V



**BEST**  
**One Series String:**  
 Eight 6 V,  
 1,000 Ah batteries,  
 for 1,000 Ah total  
 at 48 V

to correct for inverter loss (assumes an 85% efficient inverter). This results in DC Wh per day, which we will divide by our nominal battery voltage—usually 24 or 48 V (dictated by your inverter's nominal DC input). That computes the total DC amp-hours (Ah) per day. Divide this by 0.80 to account for the maximum DOD of 80% (i.e., to leave our battery 20% full after a day of discharge). Then multiply this total by your days of autonomy to get the adjusted DC Ah total.

Battery capacity in Ah is rated at several different discharge rates. For general sizing, use the Ah capacity at a 20-hour discharge rate; this is a realistic discharge rate for batteries in an RE system. Once a battery has been selected, divide your

The Trojan L16 is a classic flooded lead-acid battery used in renewable energy systems—420 Ah at 6 V.



This sealed gel-cell by FullRiver Battery requires less maintenance, but more delicate treatment than flooded batteries.



This 2 V flooded lead-acid battery by Surrette provides 1,766 Ah, giving high capacity with a single series string.





autonomy-adjusted DC Ah per day by the Ah capacity rating of your chosen battery to determine the number of parallel battery strings needed. If this number is greater than three, select a larger-capacity battery to promote a balanced charge across all strings. Each parallel string of batteries will contain as many individual cells as needed in series to reach your nominal battery voltage.

For example, assume that the backup load daily requirement is 8,000 Wh. First, correct for inverter loss by dividing by 0.85. This gives you 9,412 DC Wh per day. Dividing this by the nominal battery voltage of 48 equals 196 Ah per day. For an 80% depth of discharge, divide by 0.80, which equals 245 Ah per day. Multiply that by 4 days of autonomy (this home tends to be among the last reconnected to the grid after an outage) for a total of 980 Ah—the minimum size battery needed.

Eight 350 Ah, 6 V batteries in series yields 48 V at 350 Ah. Divide the 980 Ah total capacity by 350 Ah series battery capacity, which equals 2.8. Round up to 3 since batteries cannot be divided—the total bank (consisting of 24 batteries) will provide a capacity of 1,050 Ah. If the number of paralleled strings needed is greater than three, then source a higher-capacity battery as the basic building block.

## Choosing a Charge Controller

A charge controller's main function is to keep the battery from being overcharged and potentially damaged. The two common styles of charge controllers used with these systems attain this goal differently. Either type can be used in battery backup grid-interactive systems.

**Pulse-width-modulation (PWM)** charge controllers regulate charging by adjusting the width and frequency of the full current pulses sent to the battery. The closer a battery is to full, the farther the pulses are apart, effectively lowering the charging current.

**Maximum power point tracking (MPPT)** charge controllers have several advantages. Their software algorithms can operate a PV array at its MPP over a wide range of operating conditions and at a voltage much higher than the battery voltage. This improvement increases power harvest by up to 30% (with greatest gains attained with cooler site temperatures) and allows longer distances or smaller wire sizes between the PV array and charge controller.

A charge controller should be sized to pass all the array's current to the battery. A 60 A controller charging a 12 V battery can only pass 750 watts but if configured to charge a 48 V battery, it can pass nearly 3,000 W. Oversizing the controller slightly can be beneficial since the controller will not have to work at the upper limits of its capabilities all the time and it can harvest any unexpected wattage that could come from extra irradiance or environmental conditions.

If the PV array is capable of producing more power than one charge controller can handle, consider upgrading to a larger-amperage controller, installing multiple controllers, or



Both OutBack and Schneider Electric make MPPT charge controllers that integrate directly with their inverters. SMA America's AC coupling technology has built-in charge controlling.

increasing the battery bank voltage to get more wattage out of each controller.

## BOS Components

**Bypass breakers** allow bypassing the inverter and battery-based system to power all loads directly via the grid. Most commonly, these are installed for inverter or other removal and repair. Bypass breakers are usually located in the battery/inverter power panel, and limited to 60 A or smaller.

A **battery meter** is critical to understanding a battery bank. Much like a fuel gauge in a car, a meter will report your battery's state of charge and help you determine the need for other charging sources or to conserve during an extended power outage. These meters are your window into your battery bank's world and commonly display the battery voltage, amperage in or out, and state of charge.



Schneider Electric's LinkLITE battery monitor.

Most systems include a **production meter** to measure the amount of energy produced by your renewable energy system. Incentive programs commonly require a utility-grade kWh meter. In a batteryless system, the production meter is installed between the inverter and the grid connection to measure all energy flowing between the inverter and the grid. But in a battery-based, grid-tied system, this would only measure the net difference between your system's renewable production and energy consumed by the backed-up loads.

To get a true reading of how much energy is being produced, a special kWh meter must be used. A "Form 12S" kWh meter measures both the grid input/sell circuit to the inverter, and the inverter to backed-up loads circuit. For 240 V systems, two of these meters are needed.

All electrically live parts are kept in **enclosures** of some type. The backed-up AC loads have their own panel; DC inputs or loads have another; and batteries are in their own enclosure. Batteries can discharge massive amounts of current if shorted—via a dropped wrench or other conductive materials—so their terminals must be protected. When charging to a high voltage batteries give off hydrogen gas, which must be vented outdoors to lower the risk of fire or explosion. The battery enclosure must be sealed but vented passively or mechanically from its high point. Incoming air should be introduced at the bottom of the enclosure, and wire conduit should also extend to the bottom.

## Putting It All Together

A grid-tied with battery backup system is one of the most complicated RE systems to install—if you plan to hire a local installer, do your homework, and ask pointed questions about their related experience. The recent boom in PV installations has led to many new companies that have done *only* batteryless grid-tied work, which is much simpler and requires comparatively little design work. A North American Board of Certified Energy Practitioners (NABCEP) certification is good sign that the prospective installer has been tested on the basics of battery-based systems, but not a sure sign of an extensively experienced installer in that field.

## Access

Flint Richter (flint@rockygrove.com) lives and writes off-grid in Arkansas' Boston Mountains. He is a partner and NABCEP-certified PV project manager with Rocky Grove Sun Company, and a contracted instructor for Solar Energy International. He is teaching his young daughters the difference between a solar module and a solar panel.

### Battery Backup Inverter Manufacturers:

OutBack Power Systems • [www.outbackpower.com](http://www.outbackpower.com)  
Schneider Electric • [www.schneider-electric.com](http://www.schneider-electric.com)  
SMA America • [www.sma-america.com](http://www.sma-america.com)



# SUN ELECTRONICS

## MAKING SOLAR AFFORDABLE

MIAMI: (305) 536-9917  
PHOENIX: (602) 955-5248  
(602) 955-0361

UL MODULES:	NON UL MODULES:	INVERTERS:	GENERATORS:
UNI-SOLAR	SUN	XANTREX	HONDA
PVL-124 \$1.20/W	SUN 20 \$2.70/W	TR1512 \$650.00	EU2000i \$922.00
PVL-124 \$1.00/W with System	SUN 40 \$2.60/W	TR2412 \$770.00	EU3000i \$1822.00
DUPONT	SUN 50 \$2.50/W	TR2424 \$770.00	EU1000i \$740.00
DA100-A2 \$1.70/W	SUN 80 \$2.40/W	TR3624 \$1000.00	EN2500 \$585.00
EVERGREEN	SUN 100 \$2.30/W	XW6048 \$3097.74	EU6500is \$3,528.00
ES-A-205-fa2b \$2.20/W	SUN 130 \$2.20/W	SUN	
ES-A-210-fa2b \$2.20/W	SUN-A-200fa3 \$1.82/W	SUN-1012 \$291.67	
SOLAR WORLD	SUN-A-205fa2 \$1.82/W	SUN-1512 \$350.00	
SolarWorld 155 \$2.40/W	SUN-A-205fa3 \$1.82/W	SUN-2012 \$433.33	
BP SOLAR	SUN-SV-T-190 \$1.82/W	SUN-3024 \$525.00	
BP SX3175NQ \$2.10/W	SUN-SV-X-190 \$1.82/W	SUN-1012M \$246.67	
KYOCERA	SUN-SV-X-200 \$1.82/W	SUN-1512M \$325.00	
KD-185-GX-LPU \$2.20/W	SUN-ES-170-RL \$1.82/W	SUN-2412M \$400.00	
- Any Pallet of SUN-A \$1.74/W	SUN-ES-180-RL \$1.82/W	SUN-2424M \$400.00	
- Any Pallet of ES-A-B \$2.18/W	SUN-ES-190-RL \$1.82/W	SUN-3624M \$516.67	

### GRID-TIE SYSTEMS

- \*2160 Watt System \$2.41/watt, \$5,203.30
- \*5040 Watt System \$1.99/Watt, \$10,110.00
- 6200 Watt System \$2.17/Watt, \$13,451.00
- 10080 Watt System \$2.92/Watt, \$29,408.40

\* free shipping. Offer valid until Sep 30 2010.

### OFF-GRID SYSTEMS

- 1230 Watt System \$3.55/Watt, \$4,371.20
- 2460 Watt System \$3.03/Watt, \$7,451.40
- 4510 Watt System \$3.27/Watt, \$14,736.40
- 5125 Watt System \$3.15/Watt, \$16,143.50
- 6150 Watt System \$2.92/Watt, \$17,979.00

### BACK-UP SYSTEMS

for complete blackouts


- 1500 Watt System \$1.03/Watt, \$1,549.00
- 2400 Watt System \$0.82/Watt, \$1,967.00
- 3600 Watt System \$0.69/Watt, \$2,481.00
- 6000 Watt System \$0.95/Watt, \$5,719.00

## WWW.SUNELEC.COM



## The BEST Tool for Solar Site Analysis JUST GOT BETTER!

**USER FRIENDLY,  
FAST & ACCURATE!**

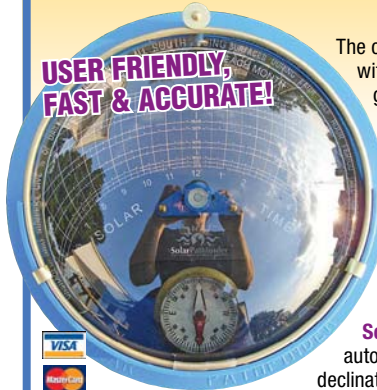

The original **Solar Pathfinder** with its reflective properties gives an excellent "instant solar blueprint" of the prospective site.

Now, the NEW **Solar Pathfinder Assistant** software, and your digital camera, carry that shading information into a concise, thorough, professional-looking solar site analysis report in just seconds.

### **Solar Pathfinder Assistant:**

automatically adjusts for magnetic declination, latitude, azimuth, tilt angle, & tracking mode (fixed, 1-axis, 2 axis);

automatically does yearly energy computations using included NREL data (no internet connection necessary); displays "before/after" results of removing obstructions; and creates professional-looking reports!



# Solar Pathfinder ASSISTANT

RAISING THE STANDARD IN SOLAR SITE ANALYSIS

3953 Marsh Creek Road, Linden, TN 37096 • 317-501-2529 • Fax 931-589-5400  
info@solarpathfinder.com • [www.solarpathfinder.com](http://www.solarpathfinder.com)



**HatiCon Solar, LLC** develops and produces high-quality, environmentally responsible mounting systems for the North American photovoltaic solar energy market. We offer comprehensive mounting solutions for ground, commercial rooftop, and residential rooftop installation.

### Key Attributes Include

- A Proven Technology with Over 405 MW Installed Throughout Europe
- Locally Sourced, All Aluminum, "Green" Solution
- Pre-Assembled Components Ensuring Low Part Count, No On-Site Fabrication, and Fast Assembly
- Comprehensive Module Compatibility
- One-Hand, Snap-Fit Installation

Contact Us:  
866-489-4472  
info@haticonsolar.com



[www.haticonsolar.com](http://www.haticonsolar.com)



**WIND TURBINES, BLADES, NEO MAGNETS, MAGNET WIRE  
DIY PLANS, CONTROLLERS, INVERTERS, SOLAR POWER**



5-blade wind turbines: Higher energy output at low wind, quieter than 3-blade. 400w-3kw

1.2kw-3.5kw Max Hybrid Systems:  
Maintenance-free, high efficiency,  
quiet, grid-tie w/backup



Top Quality DIY Turbine Parts:  
Efficient blades, powerful NEO  
magnets, controllers, Inverters,  
Towers and more

**WINDMAX GREEN ENERGY**

Web: [WWW.MAGNET4LESS.COM](http://WWW.MAGNET4LESS.COM)  
Tel: (800) 379 6818 or (972) 432 6508  
Add: 1111 Summit Ave #8 Plano TX 75074

# RED IS THE NEW GREEN.



Available in 20 countries on 6 continents worldwide, Rolls offers the broadest product line of deep cycle, low maintenance and maintenance free batteries for the Renewable Energy market. From large-scale storage to small village electrification, our flooded or AGM storage batteries deliver the power you need every time. Each is backed by our industry leading warranty, solid reputation and 97% recyclable at end of life. Green just got a whole lot meaner.

***Rolls***  
BATTERY ENGINEERING



Superior Cycling | Dual-Container Construction | Widest Range of Specs

Largest Liquid Reserves | Easiest to Install | Longest Life Span | Premium Warranties

T. 1.800.681.9914 E. [sales@rollsbattery.com](mailto:sales@rollsbattery.com) [www.rollsbattery.com](http://www.rollsbattery.com)



# Harvest the power of the Sun

Season after season,  
the sun gives its light to the earth,  
allowing life to bloom.

Every day a limitless crop of free,  
clean energy reaches our planet.

Stiebel Eltron manufactures all the tools you  
need for a successful thermal solar harvest.  
And we've been doing so since 1976.

From our highly efficient flat plate collectors and  
storage tanks to our complete line of mounting  
hardware, pump stations, controllers, and  
accessories, we have it all.

**Stiebel Eltron is your one stop source for thermal solar products.**

## SOLKIT 2 includes:



SBB 300 Plus Storage Tank



2 x SOL 25 PLUS  
Flat Plate Collectors



Pump station with  
SOM 6 Controller



Because every installation is  
different, we have a full line of  
SOLKITS and mounting  
hardware kits available. All  
components and accessories are  
available for individual sale.  
**SRCC OG300 Certified**



**STIEBEL ELTRON**  
**Simply the Best**

[www.stiebel-eltron-usa.com](http://www.stiebel-eltron-usa.com)

TOLL FREE **800.582.8423**  
[info@stiebel-eltron-usa.com](mailto:info@stiebel-eltron-usa.com)



by Bradley Berman

**O**utrage over the environmental and economic devastation from the Gulf oil spill could represent a real turning point in long-term public attitudes about oil dependence.

Yet, the common knee-jerk response is to throw our hands into the air and say, "Yeah, but we have to drive—we have to get to work." That excuse is about to ring off the scale on the lame-o-meter, because a wave of mainstream cars that run on zero petroleum is about to hit the streets of California, Oregon, Washington, Arizona, Michigan, Texas, Tennessee, Greater New York and the D.C. area. Shortly after, EVs will arrive at dealerships across the country.

The electric car revolution is on: The Nissan LEAF and Chevy Volt are scheduled to debut later this year, and about two dozen more will arrive in the next few years.

Major car companies have had the technology to make practical and affordable electric cars for more than a century. Ever since hybrid gas-electric cars stormed on the scene a few years ago, green car buyers have been eager to take electric driving to the next stage. So, why has it taken so long for auto executives to get behind electric cars?

The complicated answer to that question was addressed in the 2006 documentary, *Who Killed the Electric Car?* On the eve of the re-birth of the electric car, I posed the same question to Chelsea Sexton, one of the key figures in the film. "Electric cars challenge the status quo on which auto executives have built their companies," Sexton said. "Aggressively committing to EVs is tantamount to acknowledging that these massive companies are not sustainable with what have always been their core products, and for some, comes uncomfortably close to saying 'maybe we were wrong.'"

Don't expect a mea culpa from Big Auto. Nonetheless, one by one, the biggest obstacles—some might say excuses—to the mass adoption of electric cars are fading away.

### Propelled into the Limelight

Engineers are making steady advances in lithium-ion battery technology. These batteries provide all the necessary power, energy storage, and durability. The Chevy Volt and Nissan LEAF will come with warranties of 100,000 miles or eight years.

Worries about limited driving range also are being addressed. The next wave of plug-in cars will commonly offer a range of about 40 to 100 miles—more than needed by most Americans, who on average drive less than that each day. Moreover, car companies, municipalities, and other stakeholders are realizing that almost all electric car charging will happen at home—and can be accomplished overnight during electric grid "off-peak" hours.

In fact, according to Pacific Northwest National Labs, the current national grid has the capacity to accommodate up to 180 million plug-in cars, without a single new power plant, since most of the charging will occur off-peak.

Daytime public charging will be needed only in a pinch, but thanks to generous government grants, hundreds of thousands of public charging stations are scheduled to be built in the next five years, according to Pike Research, a Colorado-based clean-tech market research firm.

Consumers are clamoring for cleaner alternatives. The number of reservation deposits for the all-electric Nissan LEAF has blown away expectations. Three months after opening up its online ordering process, the number of pre-orders (with a \$99 deposit) is approaching 25,000, essentially selling out the car months before the first U.S. LEAF owner takes possession of keys.

It's likely that demand will exceed supply for some time. And that's before early adopters report their experiences—and share the best-kept secret about electric cars: their low centers of gravity and linear acceleration makes them fast and fun to drive.



## Nissan LEAF

There's a reason that Nissan is calling its new electric car "the world's first affordable, zero-emission car." The Nissan LEAF is priced at \$32,780, minus a \$7,500 federal tax credit and generous state-based incentives, such as California's \$5,000 rebate toward the purchase of zero-emissions vehicles. That puts the LEAF just above \$20,000—right in the sweet spot of mainstream buyers.

The LEAF is an all-electric, compact-sized hatchback that seats five adults and has a range of about 100 miles—and a top speed of 90 miles per hour. Its V-shaped design features long, slanted LED headlights and rounded, downward curves in the back. The prominent protruding headlights are designed to split and redirect airflow away from the door mirrors, thus reducing wind noise and drag. The shape says high-tech and aerodynamic, but with a sharpness that the Toyota Prius never had.

Despite its designation as a compact car, seating and headroom accommodates passengers who are 6'4", maybe even taller. The lithium-ion battery pack is tucked away under the cabin.

Like all of the upcoming electric cars, the Nissan LEAF comes standard with a system that connects to a global data center, to supply all kinds of info and entertainment to the dashboard—most critically maps showing the locations for nearby charging stations.

The initial rollout of the Nissan LEAF is limited to California, Oregon, Washington, Arizona, and Tennessee. Nissan filled its first-year



**Make:** Nissan

**Model:** LEAF

**Web site:** [www.nissanusa.com/leaf-electric-car](http://www.nissanusa.com/leaf-electric-car)

**No. of passengers:** 5

**Battery size:** 24 kWh

**Range:** 100 miles

**Max. speed:** 90 mph

**MSRP:** \$32,780

**Availability:** December 2010

reservation list only a few weeks after registration opened in May 2010. So, unless you've already submitted the \$99 deposit, don't expect to take delivery on one until 2011. But don't lose heart. Nissan not only plans to dramatically increase production of the Nissan LEAF, but it also plans to release three more electric cars in the next few years.



**Make:** Chevrolet

**Model:** Volt

**Web site:** [www.chevrolet.com/pages/open/default/future/volt.do](http://www.chevrolet.com/pages/open/default/future/volt.do)

**No. of passengers:** 4

**Battery size:** 16 kWh

**Range:** 40 miles all-electric, plus 300 miles per tank of gas

**Max. speed:** 100 mph

**MSRP:** \$41,000

**Availability:** December 2010

## Chevrolet Volt

General Motors calls the Chevy Volt an "extended-range electric vehicle," underlining this "hybrid's" crucial point of separation from pure electric cars like the LEAF, and from conventional hybrids like the Toyota Prius. The Volt operates entirely as an electric car for its first 40 miles after a full charge. It burns no gasoline during those miles, drawing energy from a 400-pound, 16 kWh lithium ion battery pack.

But a 40-mile range isn't enough to make a car practical, so the Volt also carries a 1.4-liter gas-powered engine that drives a generator—not the wheels—to charge the battery enough to give another 300 miles of range. And that only happens once the battery is exhausted to about 8 kWh of capacity.

When the Volt concept car was unveiled in 2007, it had a muscular, Camaro-like appearance. Since then, GM engineers have modified the car's shape for greater aerodynamics—resulting in something more similar to the new Chevy Malibu or Cruze. One important factor: The main column of Volt's T-shaped battery pack runs down through the center of the cabin's floorboard, limiting seating to four passengers.

GM continues to report that production Volts are on schedule, going on sale in November 2010. In late July, GM announced that the Volt will sell for \$41,000, or lease for \$350 a month for 36 months with a \$2,500 down payment. Like other electric-drive cars that carry at least a 16 kWh battery, the Volt will receive a federal consumer tax credit of \$7,500. Early availability will be limited to California; Michigan; Austin, Texas; New York City; and Washington, D.C.—with widening availability to follow in 2011.

## Ford Focus Electric

Ford's plans for an electric version of its Focus compact are not aimed at buzz and sizzle. Instead, the company is focused on addressing the biggest obstacle between EVs and the mainstream: cost.

The Ford Focus Electric will be based on the next-generation Ford Focus, a capable if not head-turning car. By choosing an existing platform—not only for its pure electric cars, but also for its hybrids—Ford will save the expense associated with developing a unique design. Ford is gambling that the cool factor lies in the technology and price, not in the car's name or the shape of the sheet metal. It's hard to know if the strategy makes sense until pricing is announced—but trimming the cost should give Ford the ability to aim for affordability and long-term profitability.

The Focus Electric is targeted to have a range of 100 miles between charges, courtesy of a 23 kWh lithium-ion battery pack. The car will use a single-speed transmission. The power train, including the motor and gearbox, are packaged under the hood where you would expect to see a gasoline engine.

The Ford Focus Electric is due in 2011. In the meanwhile—timed for late 2011—the company will offer to fleet and a few individual buyers an all-electric version of its popular small delivery truck, the Transit Connect. That vehicle, ideally suited for use by small companies, will use a 55 kW electric drivetrain system and a 600-pound, 28 kWh lithium ion battery pack. The vehicle has a 75 mph top speed and can drive up to 80 miles on a charge—perfectly fine for the needs of a local delivery cycle.



**Make:** Ford

**Model:** Focus Electric

**Web site:** [www.thefordstory.com/green/](http://www.thefordstory.com/green/)

**No. of passengers:** 5

**Battery size:** 23 kWh

**Range:** 100 miles

**Max. speed:** 85 mph

**MSRP:** Approx. \$30,000

**Availability:** 2011



**Make:** Coda

**Model:** Sedan

**Web site:** [www.codaautomotive.com](http://www.codaautomotive.com)

**No. of passengers:** 5

**Battery size:** 37 kWh

**Range:** 100 miles

**Max. speed:** 80 mph

**MSRP:** Approx. \$40,000

**Availability:** 2011

## CODA

Coda Automotive's all-electric sedan, due late this year or in early 2011, is the underdog in the race for an affordable, mass-market pure electric car. As a new start-up company, Coda doesn't have the financial and marketing resources that Nissan and General Motors are putting behind the LEAF and Volt. (Unlike Tesla or plug-in hybrid-maker Fisker Automotive, Coda hasn't received big government loans.) So Coda is planning an innovative approach to sales and service—and a multinational production process. The vehicle's body will be assembled in China at a leased plant. The partially built car will be shipped to California for final assembly. Battery packs will be built in the United States, probably in Ohio.

The all-electric Coda sedan, with a range of about 100 miles, is expected to sell for around \$40,000—although pricing has not been announced. The Coda sedan has a five-passenger chassis with a fairly nondescript design—although it was created by Pininfarina, the famed Italian car design firm.

The company will have a store in Los Angeles County, California, plus seven other locations across the state where customers can go for test drives. Each model will be built to order, so new purchasers can expect their vehicles to be delivered within eight weeks after they've been ordered. Ordering is expected to start before the end of 2010. Coda will contract to have technicians trained to do warranty work at 75 Firestone retail locations.



## Mitsubishi i-MiEV

The i-MiEV is the smallest electric car coming to market. Think of those cute Smart cars—but seating four instead of two. Although its size will be an issue for some drivers, it is a fully capable subcompact that can carry four adults—even if the ride is less than spacious.

The i-MiEV has been offered in Japan since 2009, and Mitsubishi has scheduled introducing the car in the United States for 2011. Before coming to America, the company will probably widen the track by 3 or 4 inches for stability at higher speeds. The maximum speed is around 80 miles per hour, and a driving range of about 75 miles.

Price is still up in the air—although the LEAF's price tag is putting pressure on Mitsubishi. In June, it was reported that the company could bring the price down to about \$30,000, not including incentives.



**Make:** Mitsubishi  
**Model:** i-MiEV  
**Web site:** [www.mitsubishi-motors.com/special/ev](http://www.mitsubishi-motors.com/special/ev)  
**No. of passengers:** 4  
**Battery size:** 16 kWh  
**Range:** 75 miles  
**Max. speed:** 80 mph  
**MSRP:** Approximately \$30,000  
**Availability:** 2011

# Other EVs on the Horizon



**Make:** smart  
**Model:** ED (Electric Drive)  
**Web site:** [www.smartusa.com/electricdrive](http://www.smartusa.com/electricdrive)  
**No. of passengers:** 2  
**Battery size:** 16.5 kWh  
**Range:** 80 miles  
**Max. speed:** 62 mph  
**MSRP:** TBD  
**Availability:** 2012

## smart ED

The electric version of the smart fortwo—with a top speed of 60 mph—is unlikely to shake the car's reputation for being underpowered. However, early reviews indicate that the smooth electric drive is a marked improvement compared to the gas-powered version's choppy feel. The lack of size, range, and oomph feeds into the perception of electric cars as glorified golf carts. Smart is promising a United States release by 2012.

## Tesla Roadster & Model S

The two-seat Tesla Roadster, on sale since 2008, is credited with making electric cars fun and sexy. The Roadster is adapted from components of the Lotus Elise, and will do 0 to 60 mph in 3.9 seconds, besting cars that cost twice its \$109,000 sticker price. The Roadster's audacious acceleration comes from a 185 kW (248 hp) electric motor powered by a 53 kWh Li-ion battery pack that provides 200 or so miles of range. Tesla has sold about 1,200 Roadsters—but production is slowing down as the company prepares to release its Model S in 2012 or 2013. The Maserati-looking four-door Model S is expected to sell for about \$58,000, and offer a range of 150 or 300 miles, depending on which battery pack is selected.



**Make:** Tesla  
**Model:** Model S  
**Web site:** [www.teslamotors.com](http://www.teslamotors.com)  
**No. of passengers:** 7 (two small seats for kids in back)  
**Battery size:** 80 kWh (two battery packs will be avail.)  
**Range:** 150 miles  
**Max. speed:** 120 mph  
**MSRP:** \$57,400  
**Availability:** 2012

## BYD e6

According to China's BYD, the e6 can accelerate from 0 to 60 mph in 14 seconds, has a top speed of 100 mph, and has a range of 250 miles on a single charge. Compared to other electric cars from major auto manufacturers, these claims sound exaggerated. However, BYD is backed by billionaire investor Warren Buffett, giving it a bit of street cred. A wagon, the e6 could be among the most practical of EV offerings. But product delays, unproven vehicle quality, and tough economics have raised doubts about BYD's ability to deliver.



**Make:** BYD

**Model:** e6

**Web site:** [www.byd.com/showroom.php?car=e6](http://www.byd.com/showroom.php?car=e6)

**No. of passengers:** 5

**Battery size:** TBD

**Range:** 200 miles

**Max. speed:** 100 mph

**MSRP:** TBD

**Availability:** 2011



**Make:** Volvo

**Model:** C30 Electric

**No. of passengers:** 4

**Battery size:** 24 kWh

**Range:** 90 miles

**Max. speed:** 80 mph

**MSRP:** TBD

**Availability:** TBD

## Volvo C30 Electric

The stats for the all-electric sedan may seem unimpressive: a range of about 90 miles, acceleration from 0 to 60 mph in 11 seconds, a top speed of about 80 miles per hour, and a leisurely eight hours to recharge the 24 kWh battery pack from 220-volt household service. But when it comes to performance and safety, Volvo is testing its plug-in prototypes perhaps harder and longer than anybody in the industry, and has indicated a long-term commitment to producing electric models.

## Think City

Rescued from the brink of bankruptcy, Think (formerly owned by Ford) re-emerged in late 2009 in Europe. With those in place, the company moved production of the plastic-bodied, two-seat microcar, capable of about 68 mph and 120 miles of range, to a manufacturing facility in Finland. The company is aiming for annual production of 5,000 units.



**Make:** Think

**Model:** City

**Web site:** [www.thinkev.com](http://www.thinkev.com)

**No. of passengers:** 2

**Battery size:** 24 kWh

**Range:** 120 miles

**Max. speed:** 65 mph

**MSRP:** \$22,000

**Availability:** 2012



## Toyota FT-EV & Plug-in Prius

In 2009, Toyota hinted that it might offer an all-electric commuter vehicle in the next few years. It could take the shape of Toyota's FT-EV concept, which shares its platform with the company's new minicar, the Toyota iQ—sold as a Scion in the United States. The FT-EV on display at the 2009 Detroit Auto Show promised a driving range of 50 miles. Don't hold your breath for this mini-EV, but the company is planning to introduce the Toyota Prius Plug-in Hybrid—which will provide about 12 miles of all-electric driving before returning to the Prius's standard hybrid mode. That's expected in 2012.



**Make:** Toyota  
**Model:** FT-EV  
**Web site:** [www.toyota.com/concept-vehicles/ftev.html](http://www.toyota.com/concept-vehicles/ftev.html)  
**No. of passengers:** 4  
**Battery size:** TBD  
**Range:** 60 miles  
**Max. speed:** 70 mph  
**MSRP:** TBD  
**Availability:** 2012



**Make:** Toyota  
**Model:** Prius Plug-in Hybrid  
**Web site:** [www.toyota.com/esq/articles/2010/Prius\\_Plug\\_In\\_Demo\\_Program.html](http://www.toyota.com/esq/articles/2010/Prius_Plug_In_Demo_Program.html)  
**No. of passengers:** 5  
**Battery size:** TBD  
**Range:** 12.5 miles in all-electric  
**Max. speed:** 62 mph in all-electric (Conventional Prius has max. speed of 112 mph)  
**MSRP:** TBD  
**Availability:** 2012

## Volkswagen EVs

For a number of years, Volkswagen has been displaying its e-Up! concept, including an all-electric version of the 10.5-foot minicar that seats four—three in front and one in back. The e-Up! weighs about 2,400 pounds—with more than 500 pounds coming from the 18 kWh battery pack that can deliver about 80 miles of range. However, it appears that Volkswagen has shifted gears and instead will make the Golf Blue-E-motion its first electric car—by 2012 or 2013. The Golf's lithium-ion battery pack will have a range of about 90 miles, capable of delivering 0 to 62 mph acceleration in 11.8 seconds, with a top speed of about 87 mph.



**Make:** Volkswagen  
**Model:** Golf e-Motion  
**Web site:** TBD  
**No. of passengers:** 5  
**Battery size:** 26.5 kWh  
**Range:** 90 miles  
**Max. speed:** 85 mph  
**MSRP:** TBD  
**Availability:** 2013



**Make:** Volkswagen  
**Model:** e-Up!  
**Web site:** TBD  
**No. of passengers:** 4  
**Battery size:** 18 kWh  
**Range:** 80 miles  
**Max. speed:** 85 mph  
**MSRP:** TBD  
**Availability:** 2013

## Access

Bradley Berman is the editor of PluginCars.com and HybridCars.com. He writes about alternative cars for *The New York Times*, *Detroit Free Press*, Reuters and other publications. Mr. Berman is a tireless researcher of the green car market. He speaks directly to industry insiders and participates as a panelist at numerous professional conferences.



## Clean, household electricity without the electric company

Convert 12V DC power into 120V AC power identical to your home electrical power — in true sine wave form



Computers



LCD Screen  
Televisions




Medical  
Equipment



Audio  
Equipment



Laser  
Printers



■ Pure Sine  
Wave  
■ Modified  
Sine Wave

- Run sensitive electronics that won't run with modified sine wave inverters.
- Certain appliances will run quieter, faster, cooler or with less electrical noise.
- Wagan Tech Pure Sine Inverters range from 180–5000 Watts.
- Compatible with off-grid solar power systems.
- Remote Control and USB power available on many models.
- Wagan Tech inverters are always 24 hour rated.



### Elite Pure Sine Inverters

For more information, visit us online at  
[www.wagan.com/elite](http://www.wagan.com/elite)

## SOLAR TRAINING AT ITS BEST

**Solar Energy International's** certified, industry-experienced instructors have trained more than 16,000 people from 66 countries around the globe.

Learn more at [solarenergy.org](http://solarenergy.org)



Visit us at Booth #1331 at Solar  
Power International in L.A.




**SOLAR ENERGY INTERNATIONAL**  
renewable energy education for a sustainable future

Register online at [solarenergy.org](http://solarenergy.org)

Carbondale/Paonia CO

**970.963.8855**



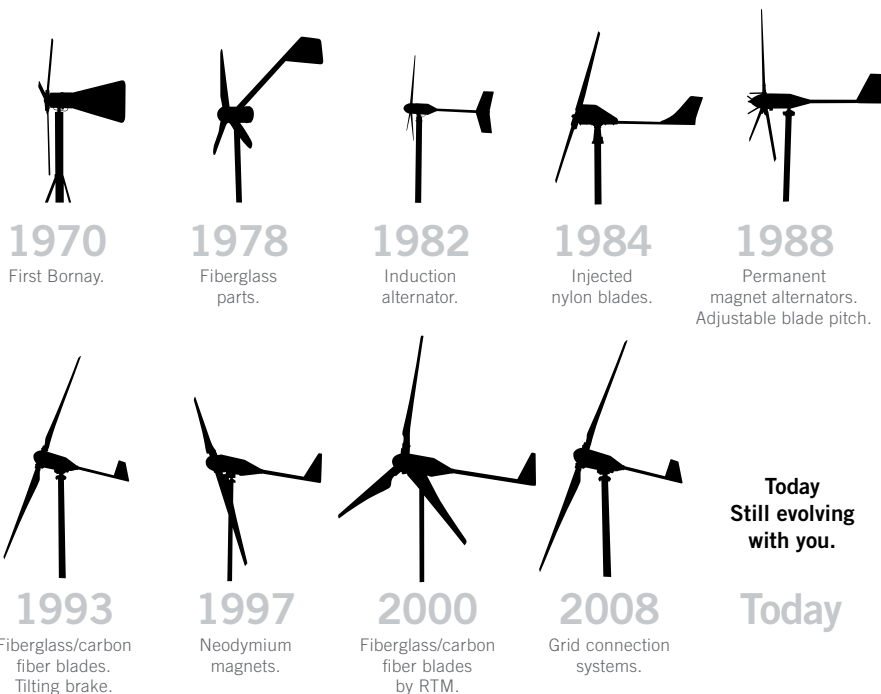

# Join the Bornay experience.

From 1970 we've been pioneers in making use of wind energy. In taking light to isolated places.

Four decades is a long time. We began in Europe, but we've applied our technology in 50 countries: the United States, Japan, Angola, the Antarctic ...

We've developed the most reliable low-power **windturbines** in terms of performance and robustness. Over 400 installations across the world have chosen a **Bornay**.

Now is the time to contribute to distributed generation by using **windturbines specifically designed for grid connection to work for you.**

Now, we're looking to embark on a long journey in the **United States**, sharing experience, knowledge and technology. We want to work with you, guaranteeing you quality installations and ensuring safety for your customers.

When you think mini wind turbines, put your trust in **Bornay**.

For joined-up energy, join the **Bornay experience**.



[bornay.com](http://bornay.com)

Bornay Windturbines 600 1500 3000 6000 W

**Bornay** 

In Movement  
Since 1970.

# KEEPING TABS ON YOUR PV SYSTEM

by Michael Brown

Until recently, consumers had few choices to help them keep tabs on their grid-tied PV systems. Most PV monitoring products were inverter-specific data loggers, which uploaded data to the manufacturer's Web portal. Homeowners had access to raw data—inverter energy production, simple alerts, and approximations of the CO<sub>2</sub> saved—but little more.

Now, monitoring products are providing deeper insight into PV performance and beyond—including whole-house energy management via energy generation and consumption monitoring. Newer monitoring systems can tell you how much money is saved on electric bills; report on whole building, branch circuit, and individual loads; and illustrate the effects of energy conservation steps taken.

The value of solar energy and energy conservation is best shown if their daily effects can be readily monitored. According to a February 2009 study by the Electric Power Research Institute, residential electricity usage feedback tools—such as monitoring devices—are effective at encouraging conservation. The study showed that using monitoring systems resulted in up to an 18% reduction in energy use, and that more direct, detailed information leads to higher levels of conservation. Being able to examine data can yield enough savings for the monitoring equipment to pay for itself—and more—over the life of the home.

"The future of residential PV in the United States is dramatically improving—playing a bigger role in the energy mix," says James Bickford of Tigo Energy, manufacturer of the Module Maximizer and its monitoring software. "The monitoring component will be a critical piece, allowing for control and management of distributed power sources and integration with the utilities."

There are many inverter and whole-house monitoring devices on the market—this article discusses hardware and software solutions that support monitoring of solar generation for residential systems.

## The Pitfalls of Data Communication

A big part of monitoring is getting the data where it needs to go. We can break data transfer into two parts of the communications process: from the solar equipment to the data logger, and from the data logger to the Internet.


A cable is the simplest means of getting the data from the solar

equipment to the data logger—but running cables can be difficult or impossible due to the paths across land, in trenches, through walls, and in attics. This has driven the industry to introduce radio technologies such as wireless computer networking (WiFi); power line communications (PLC), which modulate data over AC lines; and radio technologies such as ZigBee, a wireless home area networks (WHAN) standard. These technologies have their own issues with distance, obstructions, and interference.

Moving the data from the logger to the Internet normally involves connecting with the homeowner's always-on Internet service, which is typically cable modem, DSL, or fiber optic network. Cat5 cables or WiFi are common but also share the above issues. Cellular routers allow for an upload strategy that's independent of the homeowner's service, but they can pose a significant one-time cost of about \$200, as well as ongoing monthly data service fees. The cellular industry has recently recognized the need for residential data service and more affordable service plans are available, from \$10 to \$40 a month.

Careful review of the data communications requirements of the products, and assessing your situation, should lead to successful monitoring. Most products offer several options, so you'll need to research which data communication solution is best for your needs.


## CHOOSING A MONITORING SYSTEM

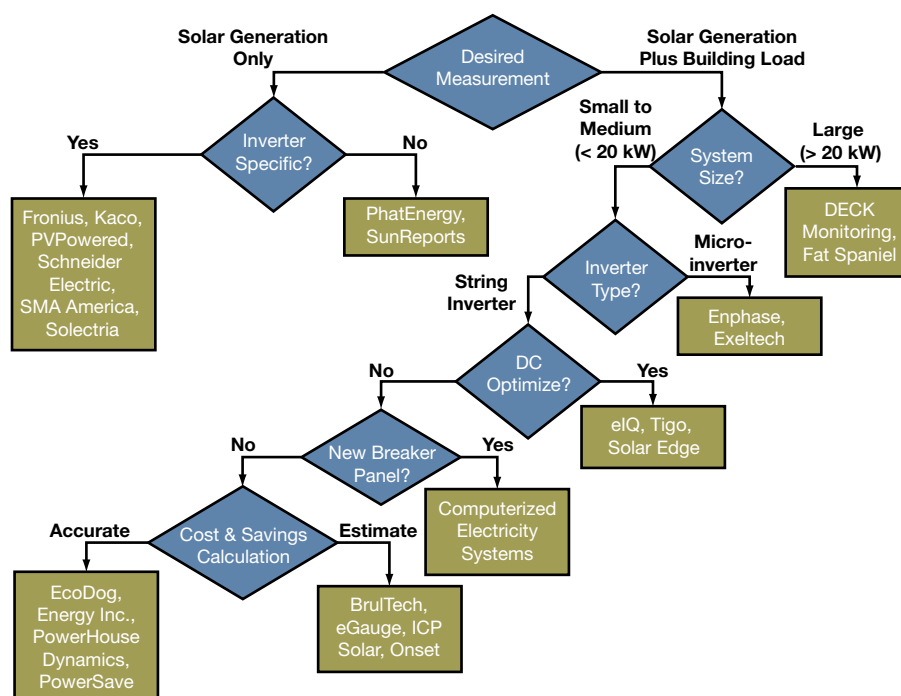




## Inverter-Tied Monitoring

Manufacturers of residential-sized inverters provide proprietary, basic monitoring equipment. There is little compatibility *between* different manufacturers' systems, but there is movement to standardize cables, wireless communications, and data protocols. Most inverter-paired monitoring systems offer data loggers that upload to the manufacturer's Web site, and some offer wireless displays that communicate over radio, such as Bluetooth. With wireless options, carefully evaluate the distances and obstacles to ensure a strong signal. Manufacturers' data monitoring systems include:

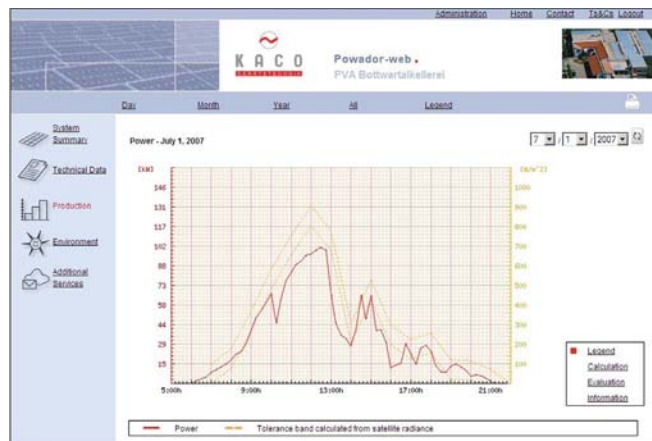


**KACO's** watchDOG card's Ethernet port provides system data monitoring. This data drives both the blueplanet Web portal and the customizable inSIGHT wireless Internet, which displays system data via an RSS data feed—an online format used for delivering regularly updated content. Their proLOG device adds PC monitoring of multiple inverters, along with alarms and weather station sensors.

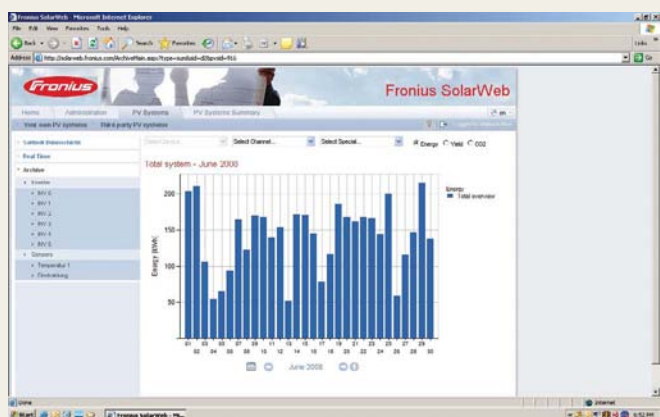

**FRONIUS** offers local PC data logging, analysis, and display; a weather station with multiple environmental sensors; and a wireless Personal Display. Data can be uploaded to their Solar.web site through a communications card and Data Logger Web device, which can be integrated with the Crestron home automation system. The wireless Personal Display uses a rechargeable battery that must be recharged and replaced periodically, or plugged into an AC outlet (becoming a small phantom load).



**PVPOWERED'S** PVM1010 module collects and uploads data to its [www.mypvpower.com](http://www.mypvpower.com) Web portal. Some inverter-independent monitoring systems, such as DECK monitoring, can connect to the PVM1010, and read the production and status data produced by the inverter. "The PVM1010 provides remote visibility to stakeholders in a system, enabling inverter system reports on system health, assisting the installer and manufacturer to provide a higher level of support," says Erick Petersen, vice president of sales and marketing at PVPowered.

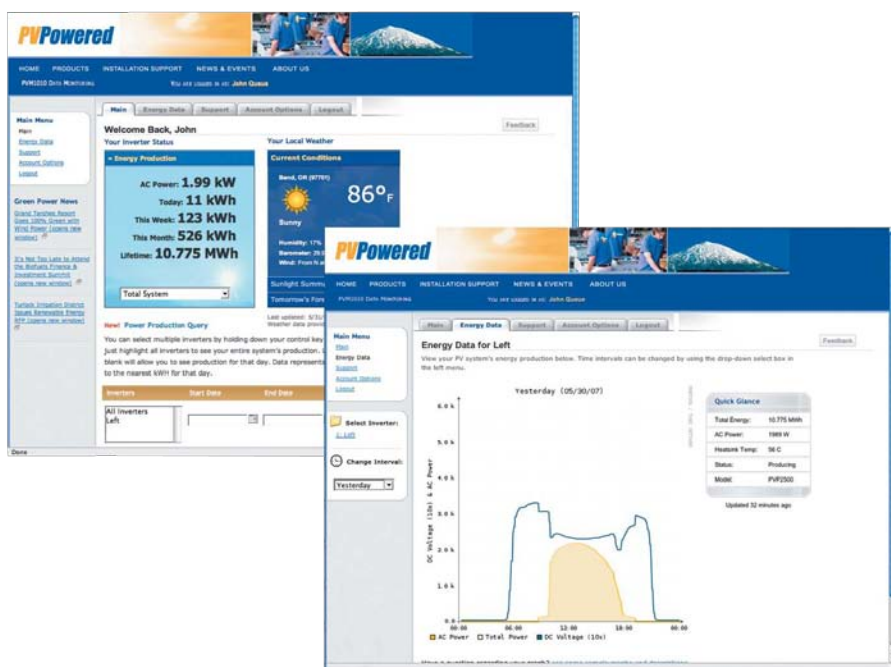


**SCHNEIDER ELECTRIC'S** RS-232 port provides for direct connection to a PC, and there are several third-party applications to collect and display the information. They also offer the GT Solar Inverter Monitor, which is wired to the inverter and is basically a remote version of the inverter faceplate meter. Slightly enhanced, it can show combined and separate information for up to five inverters. Their wireless gateway display can feed their Yahoo! widget via Ethernet or WiFi, but there is no Internet access to inverter data. Third party apps give you access to the raw data. I have a Schneider system and have built my own open-source solar monitoring application for it ([mike-land.com/Solar\\_Power/solar\\_power.html](http://mike-land.com/Solar_Power/solar_power.html)).



**Schneider Electric's** wireless gateway display.



The SolrenView gateway routes inverter data to the company's Web site.

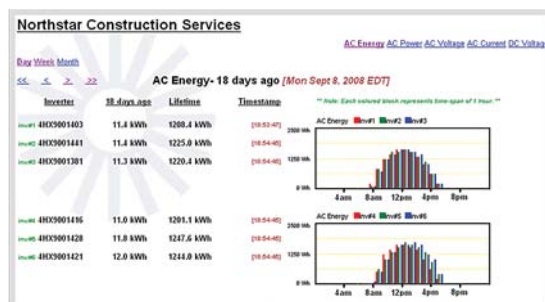

**SOLECTRIA** offers sophisticated monitoring options, with subarray monitoring, revenue-grade (+/-0.2% or 0.5% accuracy, depending on the meter) power readings, and delivery of data to state agencies for monthly rebate-check calculation. Inverters are wired to the gateway, which uploads data to the SolrenView Web site. Building energy consumption monitoring and weather stations are optional add-ons.

## INVERTER-TIED MONITORING

Company	Product Name	Consumption Tracking	Modbus Devices	Weather Station
<b>Fronius</b> • <a href="http://www.fronius.com">www.fronius.com</a>	Personal Display, Solar.Web	N	N	Y
<b>Kaco</b> • <a href="http://www.kaco-newenergy.com">www.kaco-newenergy.com</a>	blueplanet (inverter); inSIGHT, proLOG, watchDOG (monitoring)	N	N	Y
<b>PHAT Energy</b> • <a href="http://www.phatenergy.com">www.phatenergy.com</a>	PHATlogger	N	N	Y, with Heliodyne
<b>PVPowered</b> • <a href="http://www.pvpowered.com">www.pvpowered.com</a>	PVM1010, mypvpower.com	N	Y	Y
<b>Schneider Electric</b> • <a href="http://www.schneider-electric.com">www.schneider-electric.com</a>	GT Solar Inverter Monitor, Gateway	N	N	Y
<b>SMA America</b> • <a href="http://www.sma-america.com">www.sma-america.com</a>	Sunny Web Box, Sunny Beam	N	N	Y
<b>Solectria</b> • <a href="http://www.solren.com">www.solren.com</a>	SolrenView, Gateway	Y	Y	Y
<b>SunReports</b> <a href="http://www.sunreports.com">www.sunreports.com</a>	Apollo1	N	Y, SHW, heat pumps, wind	N






**SMA AMERICA'S** Sunny WebBox collects and uploads data to the Sunny Portal Web site through a wired piggyback card installed in each inverter. Weather station sensors can be added to the Sunny WebBox. The company has recently re-engineered and reintroduced the Sunny Beam wireless device, switching from cordless-phone radio technology to a Bluetooth card in each inverter to improve the integrity of the signal. But I have found distance limitations on the signal strength when walls or ceilings are between the inverter and the Sunny Beam. An integrated solar cell can keep the monitor's battery charged.



The Sunny Beam Bluetooth-connected wireless display.

**SUNREPORTS** is unique in this list, as it is an independent company, but it collects solar production data through a direct connection to SMA America, Kaco, Fronius, or PVPowered inverters. This avoids the hassle of installing alternating current transformers (CTs) into the breaker panel as required by most inverter-independent monitoring products (see "Inverter Independent Monitor" section). Its product can also monitor solar hot water systems. Data is collected by the Apollo1 unit and sent via Ethernet to the customer's router. It can compare actual power generation against PVWatts or other software energy predictions.

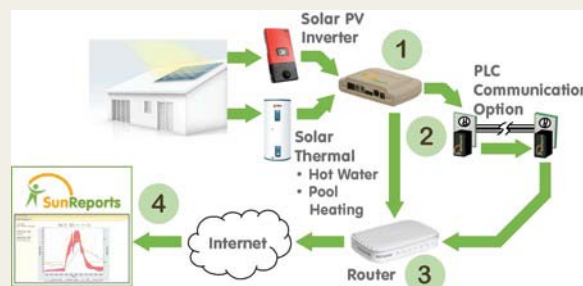

Data Path to Internet	Accurate Financial Tracking	PC Display	Wireless Display	Web Site Display	iPhone App	Home Automation	Cost
Cat5 inverter to Data Logger Web, Cat5 to router	N	Y	Y	Y	N	Y	\$300-800
Cat5 cable from watchDog to router	N	Y	Y	Y	N	N	watchDog \$495; blueplanet from \$2,150; inSIGHT from \$195; proLOG from \$975
WiFi to router	N	N	N	Y	Soon	N	\$400-600
Cat5 cable from PVM1010 to router	N	N	N	myppower Web site	N	Y	\$399
Cat5 or WiFi from Gateway to router	N	3rd Party	Y	Yahoo! widget	N	N	GT Solar Inverter Monitor \$300; Gateway \$650
Piggyback card RS-485 to Web Box, Cat5 to router	N	Y	Y	Y	N	N	\$300-600
RS-485 from inverter to Gateway, Cat5 to router	N	N	N	Y	N	N	From \$450
Wired to source, Cat5 &/or PLC Apollo1 to router	N	N	N	Y	N	N	\$799

## Inverter-Independent Monitoring

Several monitoring solutions are inverter-independent. The basic technology is to use CTs in the homeowner's circuit breaker panel to obtain data. One pair of CTs (for 240 V utility service) monitors the conductors from the inverter to a double-pole breaker to keep track of the home's PV generation. Another pair reads the conductors from the utility meter to the main breaker to track net building load—the amount of energy that comes from the utility. More CTs can be used to monitor individual 120 V branch circuits for appliances or other loads, or in pairs for 240 V branch circuits, such as for air conditioners. With an array of CTs installed in the circuit breaker panel, the raw data can reflect a home's full energy profile.

While this level of monitoring is powerful, installing CTs into a breaker panel presents some issues. First is jurisdiction approval and adherence to *National Electrical Code* standards. One issue is tapping into a branch circuit breaker—this enables the device to measure voltage and calculate power. Since this creates a small branch circuit inside the breaker panel, *NEC* Section 210.19 can apply. Some authorities also insist that the complete assembly of breaker panel and monitoring unit be UL-listed—an impossibility. UL Standard 1244 and 916 govern electrical monitoring devices, and vendors can choose to test and certify against one or both of these. Some permitting offices may be unfamiliar with this technology, so you may have to educate the staff on UL listing and *NEC* requirements that apply.

The second issue is physical space. CTs and the other equipment take up room in the typically already-crowded breaker panel. Locating additional equipment may necessitate mounting a suitable enclosure to the side of the breaker panel.

The third issue is data communication. Most CT-based systems transmit their data using PLC over the home's power lines to a data logger. Signal integrity can be compromised by branch circuit length and "noisy" devices near the logger, such as computers, home electronics, or motorized appliances such as refrigerators, blenders, and air conditioning compressors—anything that causes radio frequency interference (RFI). Despite the challenges, most CT-based systems have few problems.

### Independent Options

Given the many options, how can you determine the best choice for your system? One differentiating factor is the device's ability to either estimate the savings and costs of PV generation and building consumption, or to accurately calculate it given the homeowner's utility rate schedule. Estimation based on a single approximate energy cost per kWh offers only a rough view of system performance, while accurate calculations allow the homeowner to do real analysis of generation and conservation effects on their actual utility charges.

## INVERTER-INDEPENDENT MONITORING

Company	Product	Consumption Tracking	Thermal Tracking	In Breaker Panel	Inverter-Direct	Modbus Devices
<b>Also Energy</b> • <a href="http://www.alsoenergy.com">www.alsoenergy.com</a>	PowerTrack, PowerLobby	Y, Net & branch circuit	Y	Y	SMA, Modbus	Y
<b>BrulTech</b> • <a href="http://www.etherbee.com">www.etherbee.com</a>	ECM-1240	Y, Net & branch circuit	N	Y	N	N
<b>Computerized Electricity Systems</b> • <a href="http://www.c-e-systems.com">www.c-e-systems.com</a>	Smart Distribution Panel	Y, Net & branch circuit	N	Replaces panel	N	N
<b>DECK Monitoring</b> • <a href="http://www.deckmonitoring.com">www.deckmonitoring.com</a>	Residential Core Package	Y, Net & branch circuit	Y	Y	SMA, PVPowered	Y
<b>EcoDog Inc.</b> • <a href="http://www.ecodoginc.com">www.ecodoginc.com</a>	FIDO	Y, 16 branch circuits, max. 64 boxes x 16 CTs	Y	Y	N	N
<b>eGauge</b> • <a href="http://www.egauge.net">www.egauge.net</a>	eGauge	Y (1), Net (2) & up to 9 branch circuits	N	Y	N	N
<b>Energy Inc.</b> • <a href="http://www.theenergydetective.com">www.theenergydetective.com</a>	TED 5000	Y	N	Y	N	N
<b>Fat Spaniel</b> • <a href="http://www.fatspaniel.com">www.fatspaniel.com</a>	Solar Splash	Y	Y	Y	Y	Y
<b>ICP Solar</b> • <a href="http://www.icpsolar.com">www.icpsolar.com</a>	GreenMeter	Y, 4 AC circuits	N	Y	N	N
<b>Onset</b> • <a href="http://www.onsetcomp.com">www.onsetcomp.com</a>	HOBO	Y	Y	Y	N	N
<b>PowerHouse Dynamics</b> • <a href="http://www.powerhousedynamics.com">www.powerhousedynamics.com</a>	eMonitor	Y, Net & 100 branch circuits; plus appliance transmitters	Y	Y	N	N
<b>PowerSave</b> • <a href="http://www.currentcost.net">www.currentcost.net</a>	ENVI	Y, Net & 9 branch circuits, plus appliance transmitters	N	Y	N	N



**ALSO ENERGY'S** PowerTrack device monitors solar-electric generation; whole-house and branch-circuit demand; and solar thermal systems; with accurate energy cost calculations (see "Independent Options" sidebar). It offers three models of weather station and can connect to SMA America inverters and any Modbus RS-485-compatible inverter (see below) and meter. The PowerLobby device is an option for performance display on a kiosk.

Modbus is an industrial-control data protocol that has been adopted by many commercial solar-monitoring devices, such as AC meters, weather stations, inverters (for status codes and power readings), and DC string current monitoring devices. RS-485 is a serial cable wire similar to the common RS-232 computer standard, but allows for up to 32 devices on a cable up to 4,000 feet long.



## BRULTECH RESEARCH'S

ECM-1240 collects and displays solar-electric generation values, and whole-house and branch-circuit demand numbers for net-usage reporting. It offers several communication options using the EngineP software to connect to a local PC, Web site, and Google's PowerMeter.


## COMPUTERIZED ELECTRICITY SYSTEMS (CES)

is unique in the market—its Smart Distribution Panel is an entire circuit breaker panel with built-in monitoring and automated switching/load balancing of 24 branch circuits. In addition to solar-electric system monitoring, it can integrate with wind and engine generators, smart meters, and smart appliances. CES offers a wireless display and a number of communication options to upload data to the Web site. The device also can communicate with home automation systems via its ZigBee interface.



Weather Station	Data Path	Accurate Financial Tracking	PC Display	Wireless Display	Web Site Display	iPhone App	Home Automation	Cost
Y	Cat5 to router	Y	N	N	Y	N	N	\$300–2,000
N	RS-232 or ZigBee–Gateway to PC or Cat5 adaptors to router	N	Y	N	Y & Google PowerMeter	N	Y	
N	Cat5, WiFi, ZigBee, PLC, GPRS options	Y	N	Y	Y	N	Y	\$1,500–3,000
Y	Cat5 to router	Y	Y	N	Y	N	N	\$700–2,000
N	PLC, serial/USB port to PC	Y	Y	N	N	N	N	\$1,000–1,700
N	PLC to HomePlug gateway	N	N	N, Archos tablet	Y, & Google PowerMeter	N	N	\$550–950
N	PLC to Gateway, Cat5 to router	Y	Y	Y	Y	Y	Y	\$200–400
Y	Cat5 to router, cell modem, satellite	Y	N	N	Y	3rd Party	Y	Installer sets price
Y	Cat5 to router	N	N	Y	Y	N	N	\$499.95; weather sensors approx. \$100 ea.
Y	Wired sensors to U30, Cat5 to router, WiFi or cellular	N	Y	N	Y	N	Y	Starting at \$675
N	WiFi to router	Y	N	N	Y	Y	Y	Starting at \$689
N	Wireless to Web Bridge, USB to PC, Cat5 to router	Y	Y	Y	Google PowerMeter	N	N	\$129–200

**DECK MONITORING'S** Residential Core Package is at the high end of residential monitoring. It offers revenue-grade meters, with PV generation, and whole-house and branch-circuit demand monitoring. It also directly connects to SMA America and PVPowered inverters, and any on-site Modbus devices. Accurate energy calculations, weather station sensors, and a Web interface round out the monitoring needs of large residential systems (20 kW and up).

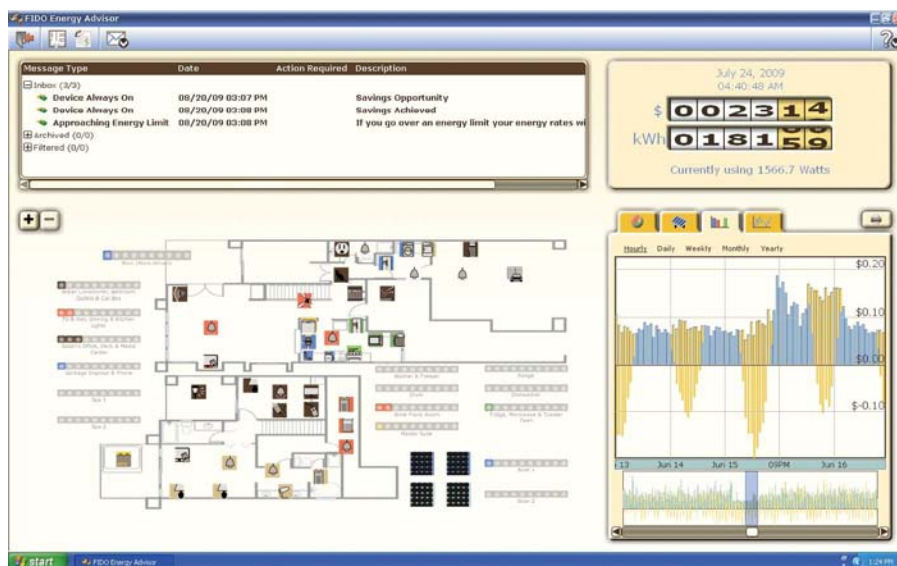

**EcoDog's** FIDO system monitors energy generation and a nearly unlimited number of branch circuits for room-by-room monitoring of a building's energy consumption. Data is collected via PLC and displayed only on a local PC. The system generates recommendations for energy savings based on consumption patterns.

**EGAUGE** offers a low-cost solution for PV generation monitoring, with net and branch-circuit demand monitoring on up to 12 input channels. Data is sent over PLC to the homeowner's router. The company is working on a half-height enclosure for easier installation in the breaker panel. The device has a built-in Web server for local access, which displays the same highly detailed charts as the eGauge Web site to track energy generation and consumption. It also syncs with the Google PowerMeter Web site.



The Energy Detective reports real-time energy use.



**ENERGY INC.** offers The Energy Detective (TED) 5000 that can monitor solar or wind generation, and whole-house or branch-circuit consumption. It can handle accurate utility energy calculations, displayed on a small wireless device, a local PC, the TED Web site, or the Google PowerMeter Web site. Several iPhone apps are available from third-party developers to sync with TED, allowing homeowners to keep tabs on their home from their phone.




**FAT SPANIEL** offers solar monitoring for small home systems to multi-megawatt systems. For the residential market, its Solar Splash offers inverter-direct connections to most inverters on the market, revenue-grade power meters for generation and consumption, weather stations, accurate energy calculations, and a custom iPhone app. The company recently exited the monitoring hardware market and has built a network of compatible hardware suppliers across the industry.




**ICP Solar's** wall-mounted energy logger and display.

**ICP SOLAR'S** GreenMeter offers monitoring on up to four DC and four AC circuits, handling multiple solar and wind, inverter, and branch circuits. It offers a weather station and a wall-mounted LCD display. The meter can also keep track of battery state of charge, such as amp-hours and amp-hours remaining. It also calculates greenhouse gas savings, cost savings, and revenue generation.

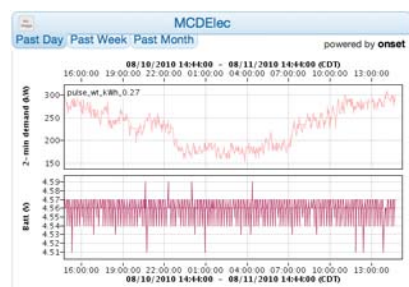

**ONSET'S** HOBO solar monitoring system is part of its overall data logging and monitoring product line. The U30 system can measure any number of DC or AC conductors for PV generation, as well as building net and branch circuits. A wide variety of weather station sensors can be added to the system. Data can be viewed on a local PC or the HOBOLink Web site.

**POWERHOUSE DYNAMICS'** eMonitor system measures solar generation, net building energy use, and up to 100 branch circuits. It can integrate with thermostats and other home automation systems. It offers a Web site and an iPhone app, with consumption alerts and recommendations.

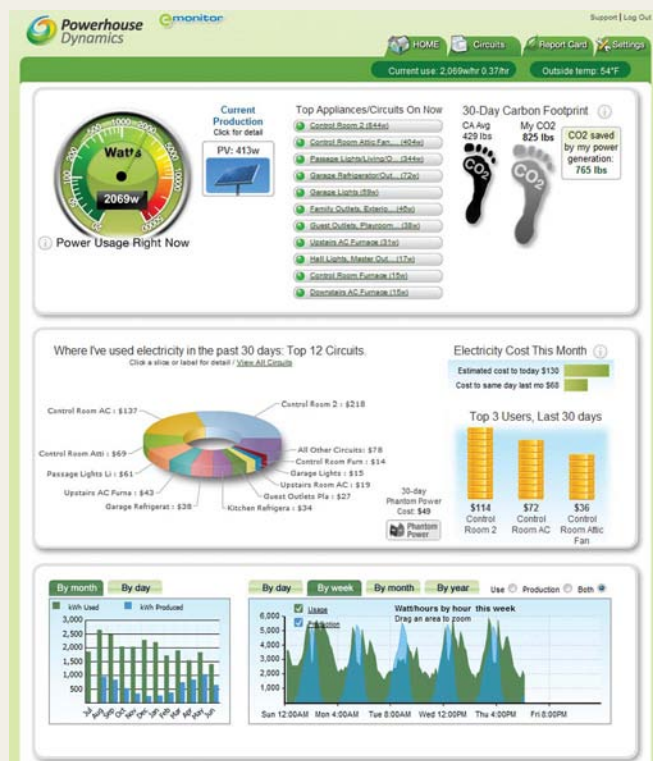

**PowerSave's** monitor offers a graphical user interface.

**POWERSAVE'S** ENVI system measures up to nine solar, net demand, and branch circuits, along with optional appliance monitors. The system comes with a wireless display and feeds local PCs and the Google PowerMeter. Several third-party applications have been written to leverage the data collected by the ENVI—some are free, some are not.

## Module-Level Monitoring

PV systems can suffer from a range of energy-limiting problems, like module mismatch, partial shading, complex layouts, and subarrays on different roof planes. To address these issues, single-module AC and DC maximization technologies have been developed. Module-level monitoring is a beneficial side effect, and customers have taken a more active interest in their systems due to the level of information available.


Microinverters mimic the function of a string inverter, but for individual modules. Mounted on the racking system or the back of each module, a microinverter takes DC power from its partner module and produces AC power at its individual maximum power point (MPP), squeezing the most out of each module and, therefore, the maximum power out of the whole system. Microinverters allow more freedom of design since modules can be placed on different roof surfaces and angles, without degrading the overall power generation. Since there is intelligence built into each microinverter, the separate data can be collected and sent to a data logger. Data is normally transported from the microinverters to a logger via a PLC, removing the need for a separate data cable.

DC maximizers adjust the DC voltage and current for some or all of the modules in a string to generate more DC power than would have otherwise been available. With a standard string inverter, underperforming modules drag down the whole system's power production. DC maximizing allows for more freedom of design, since a roof with partial shading risk can have more modules installed than otherwise—partially shaded modules won't sabotage the whole system. Since it's difficult to transmit data over DC wiring, most DC maximizers use either a separate data wire or wireless communication with the data logger.

With both single-module technologies, data is uploaded through a gateway and the homeowner's Internet connection to the manufacturer's Web servers displaying a visual representation of system performance. These Web sites display individual module performance, with the module's graphic representation laid out in the same pattern as the physical modules. The module displays normally show a numerical and color indication of power—brighter colors indicate more power generation. Users can trigger a time-lapse display or move a slider back and forth, showing dawn-to-dusk performance. The color cue can help detect an

underperforming module or string, which could be due to shading, soiling, module mismatch, blown fuses, or broken wires. The installer can troubleshoot the system, armed with a great deal of information about the system's issues.

At this point, quantifying the actual *additional* power generated is difficult, since module-level monitoring is only available with microinverters and maximizers installed—you cannot see what the individual modules are producing without the distributed MPPT equipment. However, the non-quantifiable aspect of these systems—the benefits of module-level monitoring—should be taken into account in the overall decision process. Module-level equipment and monitoring systems include:

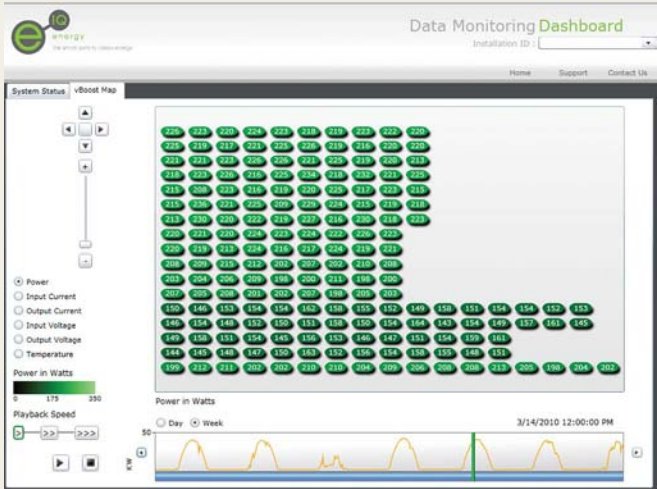

The screenshot shows the 'Data Monitoring Dashboard' for an eIQ system. It features a 'System Status' sidebar with a 'vBoost Map' and a main area with a grid of 250 module power readings (e.g., 225, 221, 220, 225, 221, 218, 222, 222, 220). Below the grid is a 'Power in Watts' line graph showing power fluctuations over time, with a 'Playback Speed' slider and a date/time stamp of 3/14/2010 12:00:00 PM.



**eIQ** offers the Parallax DC vBoost 250 and 350 W converters, which can be installed on one or more PV modules in the system, as long as the power does not exceed the limit of the vBoost. For example, two 125 W modules could be connected to the vBoost 250, but monitoring would be for the pair, not for individual modules. The eIQ uses a parallel wiring architecture to generate constant voltage coming into the inverter, maximizing the inverter's MPPT system. The Monitoring System's Communications Module reads the module-level power information from each vBoost DC converter over the DC power line, avoiding an additional data cable or wireless radio system. It uploads to the manufacturer's Web site or can be downloaded for analysis on a local PC, and offers financial reporting and fault-detection alerts.

## MODULE-LEVEL MONITORING

Company	Product Name	Consumption Tracking	Technology	PV Tracking	Inverter Direct	Modbus
eIQ • <a href="http://www.eiqenergy.com">www.eiqenergy.com</a>	Parallax Monitoring System	N	DC maximizer	Y	N	N
Enphase • <a href="http://www.enphaseenergy.com">www.enphaseenergy.com</a>	Envoy	N	AC microinverter	Y	N	N
Exeltech • <a href="http://www.exeltech.com">www.exeltech.com</a>	PVAC Module, HelioSentry	N	AC module	Y	N	N
Solar Edge • <a href="http://www.solaredge.com">www.solaredge.com</a>	PowerBox	N	DC maximizer & matching inverter	Y	Y	N
Tigo • <a href="http://www.tigoenergy.com">www.tigoenergy.com</a>	Module Maximizer	N	DC maximizer	Y	SMA	Y



**ENPHASE'S** Envoy device collects monitoring data from each microinverter over the AC power lines. The Envoy uploads to the Enlighten Web site where homeowners can view real-time or time-lapse historical data for each module. Alerts are sent if modules are not performing adequately compared to their neighbors. Enphase also has a "smart thermostat" called Environ which allows Enphase system owners to control their heating and cooling systems with an advanced thermostat.

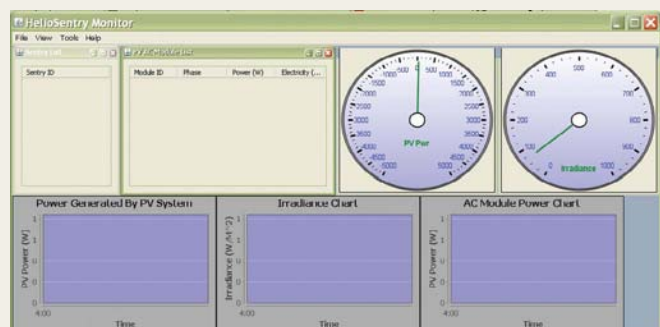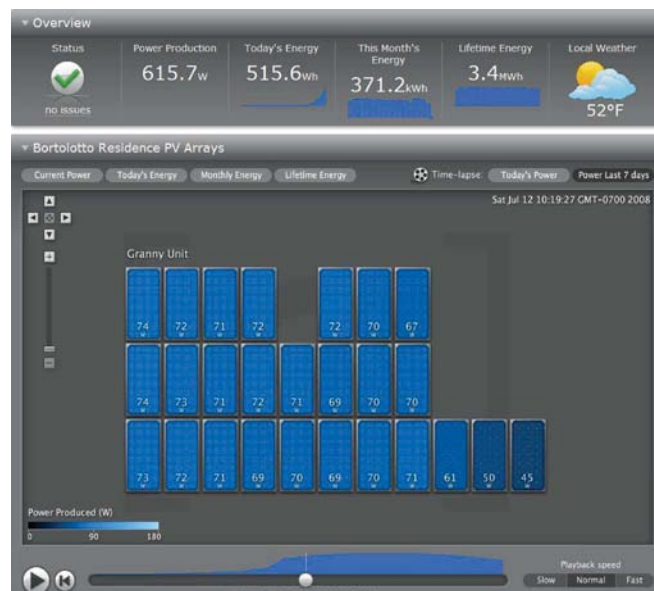

**EXELTECH'S** AC module integrates an AC microinverter in the junction box on the back of each module. This saves the additional cable and installation time at the site, and lowers cost due to the high level of integration possible at the factory. The modules transmit data over the AC power lines to the HelioSentry device, which logs and uploads solar power generation and building load information to a local PC or for remote viewing with additional software.



**The SolarEdge PowerBox and inverter.**

**SOLAREGE** installs a PowerBox on each module, or includes it in the junction box, for controlling the DC voltage. The matching SolarEdge inverter is tuned to work best at a single DC voltage. Controlling both the generation and conversion of DC power can lead to production improvements of up to 25% compared to central inverter systems without distributed MPPT. The software automatically detects problems, issues status reports, alerts via e-mail, and provides recommendations and suggests solutions.

Weather Station	Data Path to Internet	Accurate Financial Tracking	PC Display	Wireless Display	Web Site Display	iPhone App	Home Automation	Cost
Y	Cat5, WiFi, satellite	Y	N	N	Y	N	N	Distributors set price
N	PLC to Envoy, Cat5 to router	N	N	N	Y	Y	N	Included; \$365 for Envoy; plus \$9/microinverter for 5 years of service
Y	WiFi to router	N	Y	Y	N	N	N	\$750
N	PLC to inverter, Cat5 to router	N	N	N	Y	Y	N	TBD
Y	ZigBee to MMU, Cat5 to router	N	N	N	Y	N	N	\$200 for 5 years; \$625 for MMU, plus \$350 for 5 years of service

## MODULE-LEVEL MONITORING, CONTINUED

**TIGO ENERGY** offers Module Maximizers, which attach to the frame corner on the back of each module. The Maximizer Management Unit (MMU) communicates bidirectionally with the Maximizers over a wireless network, adjusting DC variables to maximize the system's power. The MMU uploads data to the Tigo Web site via an Ethernet connection, with WiFi coming soon. Homeowners can review module-level DC power details. The MMU can be wired to SMA America, Fronius, and Kaco inverters to reflect the inverter's actual AC output power readings. Alerts are generated based on expected performance value setpoints.



## OTHER MONITORING SOLUTIONS

Solar installation companies are realizing the value of including or adding a monitoring system to their customers' projects. Monitoring adds significant value to help the customer understand whole-house energy management, and assists service departments in diagnosing any issues. A few of the larger installation companies' offerings are listed below:

**Akeena** uses Fat Spaniel's residential system (described above). **Lighthouse Solar** includes eGauge's system as its Lightgauge monitoring system. **PHAT Energy's** PHATLogger is an open hardware, software, and data platform that the company uses for its solar installations. It also plans to provide the device to the

monitoring market by the end of 2010. Currently, the device can collect data from SMA America and Solectria inverters. Data is uploaded via a WiFi connection to the customer's router. **PHAT Energy** plans to have an iPhone application by the end of 2010. **REC Solar** currently includes The Energy Detective's solar generation and building load-monitoring solution with each residential system. If the customer chooses to use Tigo's module maximizing system, then a Tigo monitoring system is installed instead. **SolarCity's** in-house SolarGuard system has a Web site and iPhone application for users, and is actively monitored for any underperformance. **SunPower's** in-house Monitoring System has a wireless in-home display, Web interface, and iPhone application.

**GOOGLE POWERMETER** makes a consumer's energy consumption data transparent and readily accessible from any Web connection. The goals? Heighten energy awareness and get consumers to take ownership of and reduce their energy usage. The PowerMeter allows users to track their energy use over time—by the day, week, or month—in a graphical format and to investigate phantom (always-on) loads, which are reflected by darker, shaded portions in the graphs. Consumers can also set their energy savings goals with the Budget Tracker and share their consumption (and reduction) information with family and friends. So far, availability is limited to certain partnering utilities and companies in the United States—SDG&E (San Diego), JEA (Florida), Current Cost, eGauge, and Energy Inc.



### Access

**Michael Brown** (mwbrown42@gmail.com) worked in software architecture, development, and support at IBM for 22 years. He joined REC Solar Inc. shortly after having the company install a solar-electric system at his house, and is in the process of converting a Porsche 914 to full electric drive (porsche914e.blogspot.com).





# DIAMOND<sup>TM</sup> MOUNT

SMARTER. LEANER. FASTER.

## The whole DC enchilada



modules



racking



combiners



BOS components


## Finally, the whole nine yards, the kitchen sink, the whole shebang...

Everything you need for the DC side of a multi-MW PV system, all from one trusted source: Mitsubishi Electric. Diamond Mount is the complete DC solution including Mitsubishi Electric PV modules, a state-of-the-art ballasted racking system, all DC balance of system components, and even the combiner box.\*

Available in 100kW, 250kW and 500kW blocks, the Diamond Mount system is highly scalable for 100kW to 100MW projects. Our engineers have pre-determined the mechanical and electrical configurations so we can tell you the dimensions of the array down to the inch, the number of modules, the estimated kWh performance and, of course, the price.

**Imagine the time you'll save by using a solution that was designed to work together and save you money.** Please contact 714.236.6137 or visit [www.MitsubishiElectricSolar.com](http://www.MitsubishiElectricSolar.com) for more information.

\* Mitsubishi Electric does not manufacture or warranty all Diamond Mount components. Each component is covered by a warranty offered by our respective partner companies.

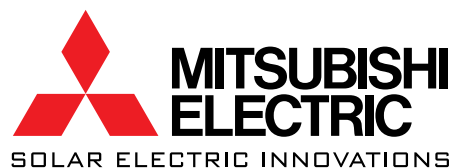

# Introducing the MidNite Solar CLASSIC Charge Controller!

## From an Industry Shaping Design Team:

- World's First Talking Charge Controller
- World's First Production Wind MPPT Controller
- 150, 200 or 250 VDC Input 12-72 VDC Output
- Up to 80 Amps Out (150V Model)

Available from:



# Maverick Solar

HELP YOURSELF TO THE SUN!



BEEN MOONED YET?



[www.mavericksolar.com](http://www.mavericksolar.com) • 512-919-4493 • [orders@mavericksolar.com](mailto:orders@mavericksolar.com)

## DESTINED TO BE A CLASSIC™



## Solar Mounting Systems

Schletter Inc.  
3761 E Farnum Place  
Tucson, Arizona 85706  
USA

Telephone: +1 (520) 289-8700  
FAX: +1 (520) 289-8695

[www.schletter.us](http://www.schletter.us)  
[mail@schletter.us](mailto:mail@schletter.us)



## One Size Does Not Fit All... Customized Solar Mounting Systems

# Harris Hydro


## Hydro-Power for Home Use

### Adjustable Permanent Magnetic Brushless Alternator

- 25 - 30% more efficient than Hi Output Alternator
- Marine Grade Construction throughout
- Re-connectable Stator
- Retrofittable on existing turbine



Manufactured by Lo Power Engineering  
P.O. Box 1567  
Redway, CA 95560

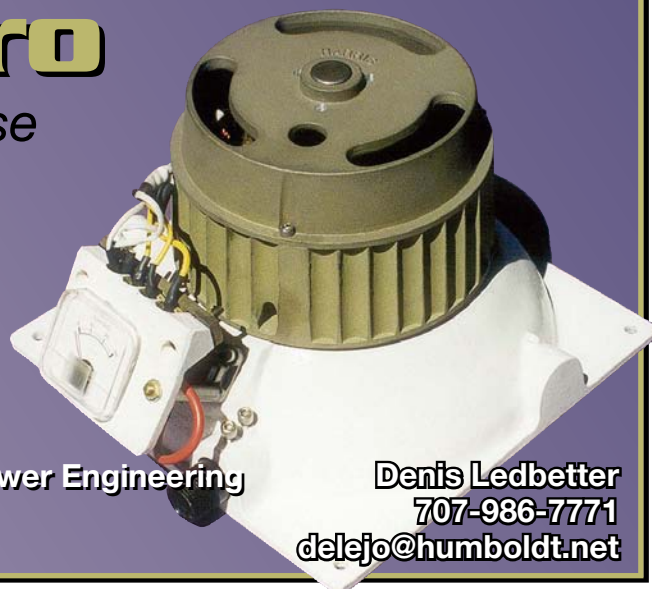

Denis Ledbetter  
707-986-7771  
[delejo@humboldt.net](mailto:delejo@humboldt.net)



A photograph of a residential house with light-colored siding and a dark roof. In the foreground, there is a white picket fence. Behind the house, a tall, slender wind generator with three blades is visible against a clear blue sky. The house has a chimney and a small window with shutters. The wind generator is positioned to the right of the house, and its blades are spread out.

Enact a new domestic  
energy policy.

Create your own energy with Skystream, a wind generator that turns the wind into affordable electricity for your home. It's safe, clean, and can protect you against rising electric costs. And right now, you'll get a 30% tax credit off the entire cost, including installation. Which makes it not only a smart thing to do, but the right time to buy. To learn more, go to [skystreamenergy.com](http://skystreamenergy.com).

**SKYSTREAM** 3.7®  
Residential wind power you can own.

[www.skystreamenergy.com](http://www.skystreamenergy.com)



# GETTING TO



The Hardisky home—before and after its renewable energy retrofit.



with Kelly Davidson  
photos by Tom Hardisky

A net-zero-energy home is an ambitious goal for a newcomer to renewable energy, but that didn't stop Tom Hardisky. Last spring, after years of exploring various options, the wildlife biologist retrofitted his 1991 ranch home in Pennsylvania with solar-electric, solar hot water, and heat pump systems that should offset 100% of his household energy needs. *Home Power* spoke to Tom about his project, motivations, and lessons learned, as well as the process of selecting a system designer and the challenges of navigating all of the available incentives.

**Home Power:** What sparked your interest in renewable energy?

**Tom Hardisky:** When I was in grade school some 30 years ago, my science teacher broke the disturbing news: We will someday run out of fossil fuel. She said that our generation was charged with finding a lasting energy solution without

**Project Name:** Hardisky Green Energy Home Retrofit

**Designer & Installer:** K.C. Larson Inc.  
of Williamsport, Pennsylvania

**Location:** Loganton, Pennsylvania—41° N latitude

**Date Commissioned:** April 19, 2010

**Solar Resource:** 4.2 average daily sun-hours

**Average Annual Utility Electricity Offset  
(PV & SHW Systems):** 17,500 kWh

further tapping into our dwindling energy resources. I realized then that by being dependent on a nonrenewable energy supply, we were moving down a disastrous path.

**HP:** So, after all those years, what motivated you to move forward with this project now?

**Tom:** The time was right as far as incentives. In addition, electricity rate caps began expiring at the beginning of 2010 for Pennsylvania electric utility companies. My electric company, Pennsylvania Power and Light, is gradually increasing electric rates. For average PP&L customers, that translates into an increase of approximately 30% in 2010. I anticipate never-ending rate increases—I thought there would be no better time to do this.

The major financial incentive for my retrofit was the Pennsylvania Sunshine Program rebate, which provided 35%





**The generation from 40 solar-electric modules offsets the home's electricity use, while eight solar hot water collectors supply the home's hot water and some supplemental space heating.**



of the cost of my PV system. The only stipulation is that it could not exceed 10 kW. The combined effect of PV, solar hot water, and heat pump financial incentives actually broadened my vision. I ended up maximizing PV module coverage on my roof *and* investing in solar hot water and heat pump systems.

Income from solar RE credits (SRECs) was an important incentive as well. I have a five-year contract with Sol Systems LLC that pays me \$280 per solar-produced megawatt-hour.

In addition, the heat pump qualified for a \$400 rebate through my local electric company's E-power Program. And, when I file federal income taxes next year, I will be able to take advantage of an available tax credit. An after-rebate 30% federal tax credit will be an important source of investment return.

**HP:** What made you decide to go for net-zero energy for your home?

**Tom:** I'm a conservationist by nature and profession, so an energy-independent home was logical and always my dream.

I wanted an RE system that would meet all of my energy needs, including home heating, hot water, and electricity. I thought maybe I could set an example for other homeowners and help us move toward that lasting renewable solution proposed by my grade-school teacher.

**HP:** Once you got serious about the idea, what steps did you take?

**Tom:** When a PV installation short course was offered by the Honesdale, Pennsylvania-based Sustainable Energy Education Development Support, I jumped at the opportunity to learn more—and possibly complete most of the installation myself. The real value in taking the course was a good education in solar energy system basics—terminology, components, and designs. By the end of the three-day workshop, I realized that having basic plumbing and home wiring skills was not enough for me to take on such a project. This was no weekend project. If I wanted a well-designed, high-quality RE system, I needed professional help.

**HP: How did you choose a system designer to work with?**

**Tom:** At a local Go Green Expo, I spoke to several RE installers. Most installers were very new to the business. Their level of experience seemed to be reflected in the quality of their expo displays and their answers to basic questions, such as, "What renewable energy system options are available?" I found that the most knowledgeable professionals had well-organized, attractive exhibits with informative literature. Designers who placed most of their emphasis on educating me rather than selling their products and services were the type of people I wanted to do business with. Installers who provided free site visits and solar analyses were on my preferred list.

## PV System

Forty Schüco 210-watt modules were installed on Schüco ezRails, which were attached to the standing seam roof's metal pans using nonpenetrating S-5! clamps. The air gap provided by the racking system helps air flow between the modules and metal roof, keeping the modules cooler and improving the system's overall efficiency. The four strings of 10 modules are wired to two Fronius 4,000 W inverters (20 modules per inverter), which are located next to the main service panel in the basement. In the first three months of operation, the system has produced 3,615 kWh, slightly exceeding PVWatts' estimate of 3,430 kWh.

## PV Tech Specs

### Overview

**System type:** 8.4 kW batteryless grid-tied PV

**Location:** Loganton, Pennsylvania; 41°N latitude

**Date commissioned:** April 2010

**Solar resource:** 4.2 average daily sun-hours

**Annual production estimate:** 9,750 kWh

**Utility electricity offset to date:** 100% (before a new heat pump system)

### Equipment

**Modules:** 40 Schüco, SMAU-1 210 modules, 210 W STC, 26.3 Vmp, 7.98 Imp, 33.7 Voc, 8.35 Isc

**Array:** Four 10-module series strings, 8,400 W STC total (263 Vmp; each string: 7.98 Imp, 337 Voc, 8.35 Isc)

**Array combiner box:** 6- by 6-inch box

**Array DC disconnect:** 30 A Square D-3 pole disconnect, HU361

**Array installation:** Schüco ezRail and S-5! seam clamps; azimuth 220° (approximately SW), tilt 15°

**Inverters:** Two Fronius IG 4000, 500 VDC maximum input, 150–450 VDC MPPT operating range, 4,000 W AC, 240 VAC output

**System performance metering:** Two kWh production meters



**Two Fronius grid-tied inverters make up the balance of the home's photovoltaic system.**

**HP: Why did you decide to work with the designer you ultimately selected?**

**Tom:** Because of the questions *they* asked *me*. The best question they asked was, "What are your energy and overall project objectives?" The K.C. Larson staff also answered all of my technical questions, and they were very receptive to allowing me to reduce costs by completing some project tasks on my own.

**HP: What modifications did you make to your home prior to installation?**


**Tom:** My existing asphalt shingle roof was 18 years old but in good repair. However, the installers asked me to consider having a standing-seam metal roof installed because it would last the life of the PV system. They also asked me to specify a light color to decrease heat buildup during the summer months.

Prior to the roof installation, I relocated the plumbing roof vent pipes and exhaust ducts from the south side of the roof to the north side. That left the entire south-facing roof free of obstacles, maximizing roof space for the PV array.

The installer also recommended that I replace my 18-year-old electric water heater, so I installed a new, more efficient, 50-gallon water heater to minimize the chance of future problems. I also sealed air leaks. I installed new basement windows with a much higher R-value, insulated the attic with fiberglass blanket insulation, and caulked and added 2-inch foam insulation along the perimeter of the basement to decrease heat loss and air infiltration.



# Hardisky Grid-Tied PV System

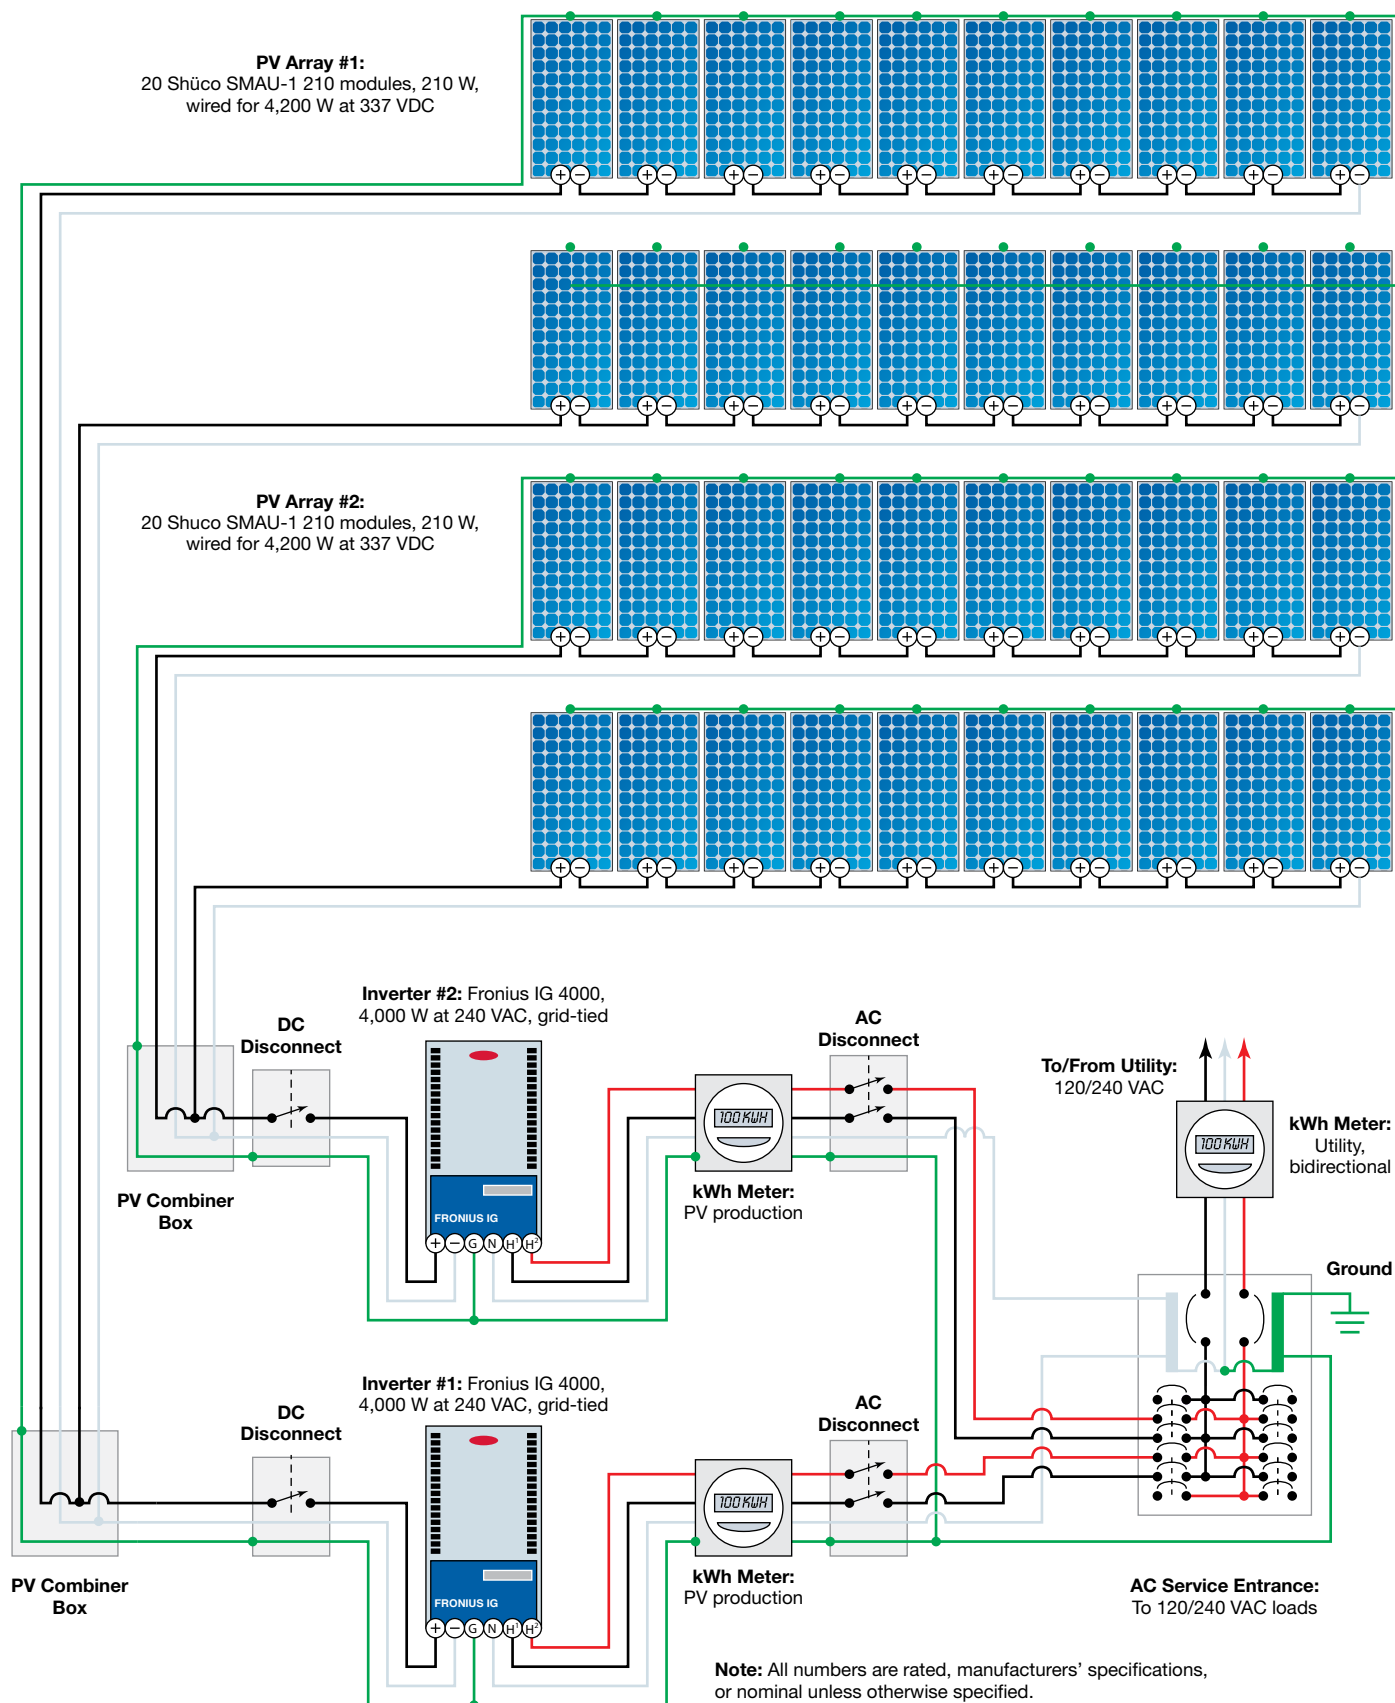

## Solar Thermal System & Space Heating System

The SHW and space heating system consists of eight collectors heating two 120-gallon tanks for heat storage that supplement the winter space-heating load. The heat is delivered to the home through a ceiling-mounted fan coil unit in the basement. In operation, the hot water is pumped from the solar storage tanks through the coils in the fan coil unit, and the fan distributes heat to the basement—with the goal of heating the basement to 75° F-plus during the daylight hours. Natural convection carries the heat upstairs.

To control the seasonal overproduction during the summer, this system has isolation valves that allow five collectors to be covered and one storage tank to be taken out of production in the summer when the heat isn't needed, leaving three collectors uncovered and a single tank supply in operation for the SHW load. By isolating the one tank in this system, the SHW has a quicker recovery at the expense of less heat storage for extended periods of cloudy weather or extra-large loads. However, three collectors can more than adequately heat a 120-gallon tank in the summer.

### SHW Tech Specs

#### Overview

System type: Closed-loop, antifreeze solar hot water

Annual production estimate: 26,597,631 Btu total

Average annual electricity offset: 7,795 kWh

Estimated percentage of hot water produced annually: 75%

#### Equipment

Collectors: 8, Schüco, Slim V

Collector installation: Ground mount on concrete pad, portrait-oriented Schüco exFlatroof TH angle and safety cross kit. Azimuth at 220°; tilt at 40°

Heat-transfer fluid: Propylene glycol

Pump controller: Schüco, Solar Pump Station, GL-30, #PS-1.3

Hydronic heater: Beacon/Morris, HB136A hydronic heater; 35,900 Btu with speed controller

#### Storage

Tanks: 2, Rheem, #120HE-1, 120 gal.

Heat exchanger: Exterior wraparound; vented for leak detection

Backup DHW: Whirlpool Energy Smart, 50 gal. electric water heater

#### Production

Summer mode: 3 collectors for 3 months: 3,449,673+/- Btu

Heating-season mode: 8 collectors for 9 months: 23,147,958+/- Btu

Average annual energy offset: 7,795 kWh



**The balance of system components of the solar hot water system.**

Since the system was installed, I've identified additional sources of heat loss as well—namely basement doors, the electric service entrance, and other unsealed foundation wall openings/cracks. I'm in the process of completing these improvements.

#### HP: Did you make lifestyle or energy use adjustments?

**Tom:** Although I made no major lifestyle changes, I am now much more conscious of my use of energy. Turning off unnecessary lighting was always a routine. However, soon after project completion, I found myself trying to figure out why my house used 6 to 8 kWh overnight—even when the heating or air conditioning was not running. I discovered that the outside security lighting was responsible for about 5 kWh each night.

My habits with respect to hot water usage have changed. During the warm months, I produce much more hot water than I can use. I used to wash my white clothes in warm water. Now, I always use hot water. When I need a bucket of water for cleaning or rinsing, I reach for the hot water faucet.

#### HP: What was the home's initial energy profile, and how did it change?

**Tom:** Prior to my solar system installation, I had an 18-year-old electric water heater, no central air-conditioning, and forced-air oil heat. Annual heating oil charges were about \$880, and my annual electric bill exceeded \$900. My annual electric consumption over the past two years averaged 5,344 kWh.



The new heat pump provides central air-conditioning that I did not have before, and I now have a much more efficient electric water heater and electric forced-air heat. Since I did away with the old furnace, I no longer need heating oil.


Overall, my electric consumption increased by 21% since system installation, primarily because of the new electric heat pump, but during the first three months of operation, I had a

monthly electric bill of \$8.45—the minimum base distribution charge from the electric company.

**HP:** Do the systems need maintenance?

**Tom:** Thus far, there has been minimal system maintenance. Because of excess hot water production, I cover five of the eight solar collectors and close down half of the solar

# Hardisky Domestic SHW System

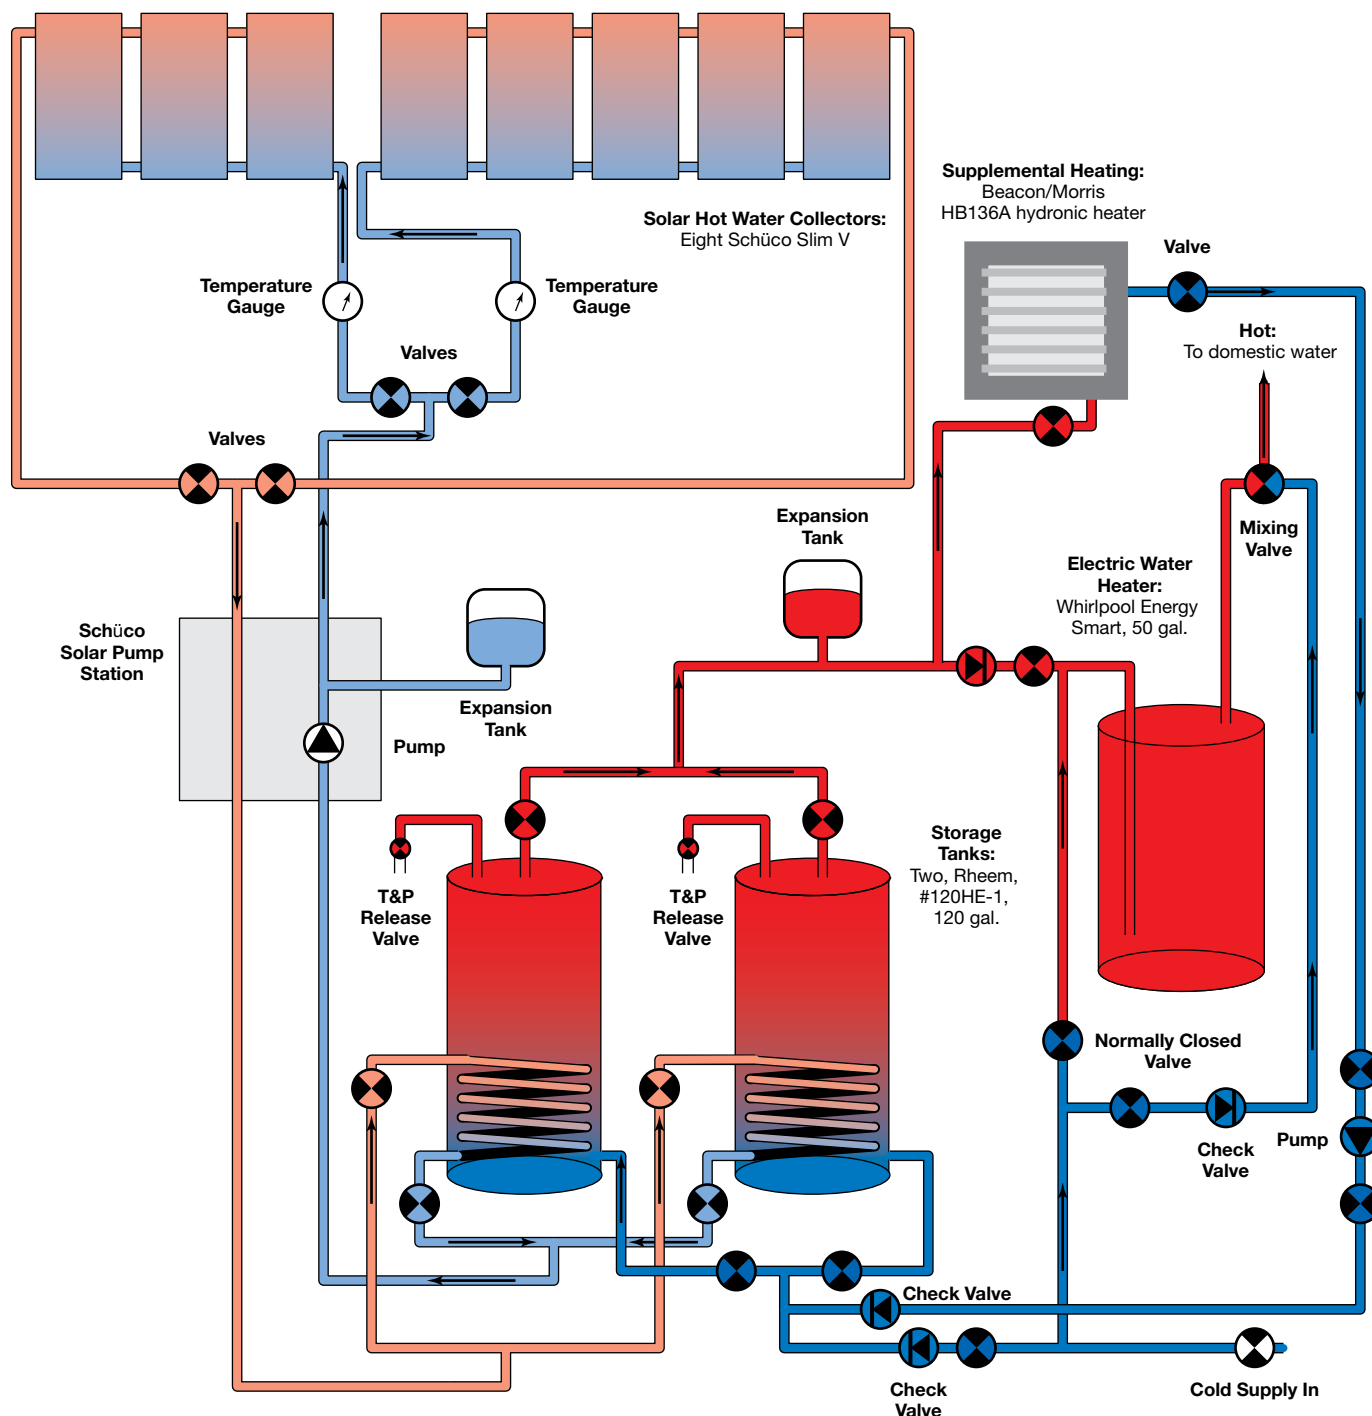

The solar fan-coil unit in the basement, which serves to supplement the home's space-heating system.

Right: A high-efficiency heat pump replaced the old furnace, providing space heating and cooling.



thermal system during the summer months. All eight panels will be in operation during the spring, fall, and winter. The maintenance work entails moving panel covers and closing a few ball valves. I'll periodically change filters in my air exchanger, and that's about it for the year.

**HP:** What did you learn from the installation process?

**Tom:** Never underestimate the effects of shading. During the design phase, the folks at K.C. Larson asked me to take my chimney down to the roofline since I had removed the fuel-oil-fired furnace. Although I did not need the existing chimney, I balked. The slight shading that my chimney temporarily casts on my PV modules in the morning seemed insignificant. However, as the sun path changed, I noticed some solar energy loss. Considering the cumulative impact

of this partial shading, I decided to lower my chimney to eliminate any shading issues but still leave Saint Nicholas with suitable access.

**HP:** Your goal is to produce more energy than you use. Do you think you'll be able to achieve your net-zero target?

**Tom:** Energy use during the winter months will greatly influence my net-zero status.

The PVWatts calculator estimates my PV system's annual production at 9,750 kWh. If my energy consumption does not increase by more than 82% of last year (5,344 kWh), I should reach net zero.

With my solar hot water system and more efficient home heating and cooling, I am confident that my systems will produce more energy than I use annually.

**With the combined output of the solar hot water and PV systems, the Hardisky home should be able to reach its annual net-zero energy goals.**





## Q&amp;A

K.C. Larson's Keevin Larson discusses the energy systems for Tom's net-zero home.

**HP:** Tom did not set out initially to design a net-zero home, so how did the project evolve to that level?

**Keevin:** The possibility of a net-zero status arose during the final design of the solar thermal system, but after the PV system design was complete. The roof was to be completely covered with PV modules and all of the available ground space was slated for the thermal collectors. After Tom approved the solar thermal and heat pump designs, it was then I knew the home could be very close to net-zero.

**HP:** How do all of the systems work together to achieve the net-zero goal?

**Keevin:** The air-to-air heat pump system puts out twice as much heat energy as the electricity put into it. Since the PV system generates electricity, it helps offset the heat pump's use during the air-conditioning mode. The heat pump system also contains a backup electric resistance heating element, which is energized if the heat pump cannot provide the needed home-heating capacity. This is when the space-heating mode of the solar thermal system can help supplement the home's space-heating needs. The less the heating element is energized, the more savings.

**HP:** What process did you use to design the solar hot water system?

**Keevin:** We installed a similar but smaller system in early 2009 for another client. This system had five thermal collectors and two 105-gallon solar storage tanks. This system proved the concept of heating the basement mass during the daytime, allowing the heat to radiate up to the first floor during the day and into the evening hours. But that other project's basement has

much more heat loss than Tom's basement, so this system will retain a warm temperature within the confines of the basement for a much longer period of time. In other words, fewer Btu of heat are required due to less heat loss and outside infiltration.

**HP:** How does the SHW hydronic design optimize efficiency?

**Keevin:** If the basement temperature is 60°F or above and the temperature in the solar storage tank is at least 75°F, the hydronic heater can still heat the basement with solar. The heater can be advantageous due to the quick delivery of the heat—it raises the space temperature instantly, and this heated air rises up to the first floor.

**HP:** What savings does the heat-pump system offer over the old oil-fueled furnace?

**Keevin:** Tom's furnace used, on average, 355 gallons of No. 2 fuel oil each year. At an average of about \$2.25 per gallon, a furnace with 80% efficiency would cost \$20.39 per 1 million Btu. If utility electricity cost \$0.11 per kWh, the cost to run his heat pump would be about \$16.12 per 1 million Btu—a 21% savings.

When the weather gets really cold, below the 35°F effective capability of the heat pump, the backup electric resistance heat will kick in. This, by definition, has a lower coefficient of performance, and uses more energy. Since it's electric, the PV system will offset at least a portion of that. But considering completed and future weatherization upgrades, the comparative amount of heating the home will require is still unknown.

## Access

Tom Hardisky (disk@tds.net) lives on a 13-acre farm in rural Pennsylvania. He is a wildlife research biologist for the Pennsylvania Game Commission. He has bachelor's degrees in biology and wildlife science, as well as a master's degree in wildlife ecology.

K.C. Larson • [www.kclarson.com](http://www.kclarson.com)

Pennsylvania Sunshine Program • [www.depweb.state.pa.us](http://www.depweb.state.pa.us) • State incentives

Sol Systems • [www.solsystemscompany.com](http://www.solsystemscompany.com) • RECs

## System Component Manufacturers:

Schüco USA • [www.schueco.com](http://www.schueco.com) • PV modules, SHW collectors

Fronius • [www.fronius.com](http://www.fronius.com) • Inverters

Goodman • [www.goodmanmfg.com](http://www.goodmanmfg.com) • Heat pump


Rheem • [www.rheem.com](http://www.rheem.com) • Storage tanks

## Home Heating & Cooling with a Heat Pump

The home's oil-fired hot air furnace was removed and replaced with a new energy efficient heat pump that was connected to the existing ductwork. The ductwork was modified to better balance the system operation. The PV system will offset the electricity required to operate the heat pump. During the heating season, the solar thermal system helps supplement the heat pump to decrease the heating cycles and electricity used, sending solar-heated water to a hydronic heating unit located in the basement.



# Puzzled? We've Got the Solution.

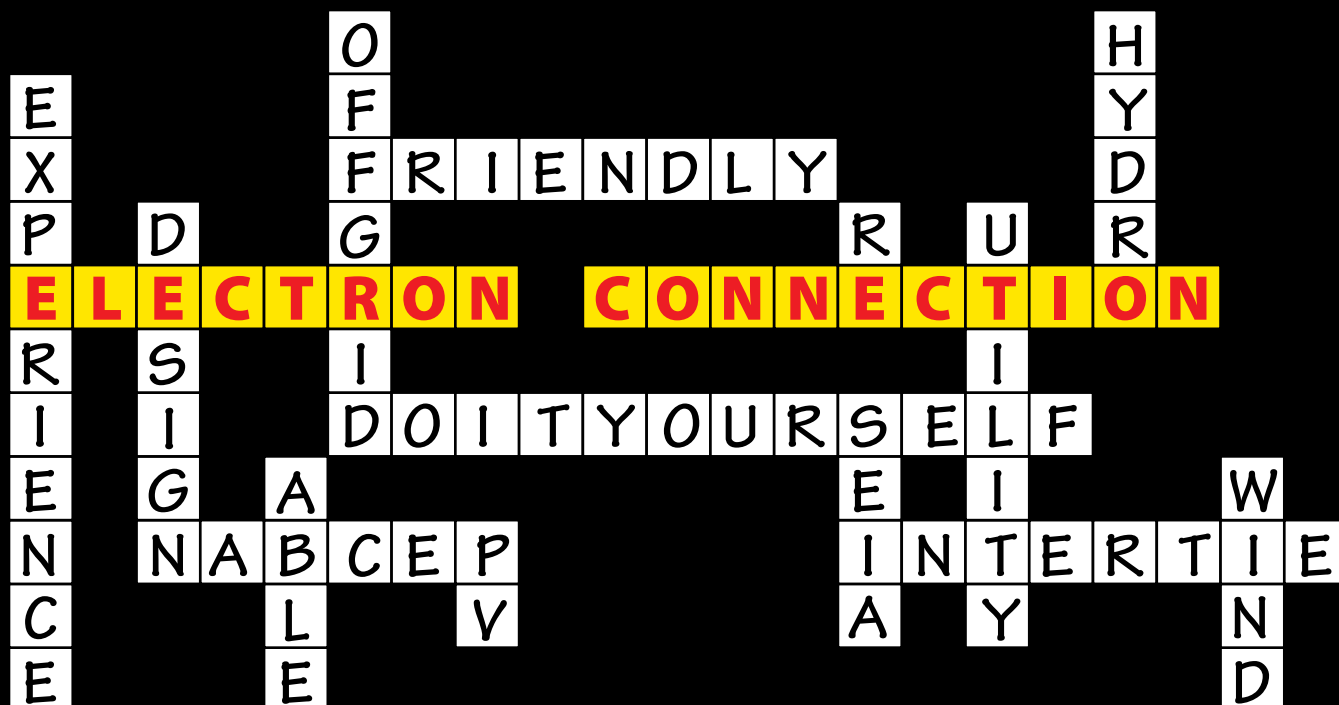

*A well designed renewable energy system is much more than a pile of hardware.*



RESIDENTIAL AND COMMERCIAL

## Experience, Expertise, Excellence

We live on renewable energy, have 20 years of experience, and have established over 500 systems. Your best resource is a local pro. We serve Northernmost California and Southern Oregon. Custom Renewable Electricity systems designed to meet your needs and site, not a "one-size-fits-all" installation that does nothing well.

Ask us about all available incentives, state and federal tax credits, and grants. We do the incentive and state paperwork for you.

Oregon Dept. of Energy Tax Certified Contractor.

Financing available in Oregon.

## WE PROVIDE COMPLETE SERVICE:

- Solar
- Wind
- Micro-hydro
- Water Pumping
- Load Analysis
- Local Site Survey
- System Design & Installation
- On-Grid and Off-Grid
- User Training & Tech Support



Bob-O Schultze  
CA Electrical  
Lic # 613554 or  
CCB # 185672



**800.945.7587 toll free**  
**www.electronconnection.com**

P.O. Box 203, Hornbrook, CA 96044 U.S.A. • Voice/Fax: 530.475.3401 • E-mail: bob-o@electronconnection.com





## With Trojan Battery, you just may forget you're off-the-grid.

With over 85 years of experience, Trojan Battery offers a complete line of flooded, GEL and AGM deep cycle batteries for reliable power and long life in the toughest off-grid locations.

Trojan Battery is the most trusted name in deep cycle technology:

- **Even longer life**
- **Superior charge performance**
- **5 year limited warranty: Best-in-class for Renewable Energy applications**

Visit [www.trojanbattery.com](http://www.trojanbattery.com) to see our selection of Renewable Energy batteries or call 800-423-6569 for the nearest Trojan Battery partners near you.

Trojan batteries are available through Trojan's Worldwide Master Distributor Network and Renewable Energy Wholesalers. For the nearest partners, call 800-423-6569 or visit us at [www.trojanbattery.com/RE](http://www.trojanbattery.com/RE)

**Receive your FREE Technical Brief on Deep Cycle Technology:**  
visit our website at [www.trojanbattery.com/RE007](http://www.trojanbattery.com/RE007)







# TAKING YOUR HOME'S ENERGY TEMPERATURE

Courtesy Fred Rogers

by Fred Rogers

"I've worked on insulating my home and conserving energy.  
How can I tell if my work has reduced my household energy consumption?"

Layering batts of new insulation over older insulation is an easy way to improve a home's energy efficiency.

Homes of all ages can benefit from higher levels of insulation, higher-performance windows, and weather stripping—but measuring the actual benefits can be difficult because fuel costs and the weather vary from year to year. This article describes one way to answer the effectiveness question, by using information available to most homeowners at no cost.

## Our Energy Retrofit

My wife Penny and I live in a small house in Reno, Nevada. Our 1952 home was built with minimal insulation—as we discovered when we started renovations in 1995. There was no insulation in the wall cavities, and only about 1 inch of deteriorated fiberglass batts in the attic.

Over the past 15 years, we added layers of R-21 fiberglass batts in the attic; they now total about 9 inches in depth. We inserted R-21 fiberglass batts into the previously empty outer wall cavities, with  $\frac{3}{8}$ -inch rigid-foam insulation (R-2) over the fiberglass batts and the wall studs to reduce thermal bridging. As of this time, we have insulated about one-third of the perimeter wall area.



Courtesy Fred Rogers



We also replaced the old steel-frame, single-pane windows and the old doors with double-pane vinyl units (U-value approximately 0.5). About 70% of the window replacement took place in 1995, before this study began, and the remaining 30% in 2002.

Our winter solar exposure is very poor, so our focus has been on incremental, yearly do-it-yourself insulation projects. For us, January is “attic insulation month.”

## The Approach

Most homeowners can measure the amount of energy used for home heating in the winter months. We can also factor in colder or warmer weather conditions by using appropriate temperature data. We can then calculate our winter heating energy use using a “weather factor” with one caveat: the “human factor”—individual consumption patterns that may be uncontrollable. For example, you may not be able to take into account unusual adjustments to your home thermostat—like if a guest stays for a lengthy visit or if someone gets sick. We have a programmable thermostat and we don’t override its settings often. So, in our case, it’s typically weather that drives heating fuel consumption.

## Measuring Home Heating Energy

Electricity, natural gas, and oil are commonly used in home heating; you can determine your energy consumption for whichever of these fuels you use. The consumption of electrical energy, whether generated by your own renewable

## Adding It Up

An insulation’s R-value indicates how well it resists heat flow. Generally, the higher the R-value, the better the insulation is at doing its job. But how and where insulation is installed also affects its performance. Insulation that is compressed too tightly into a space will not give its full R-value. And a ceiling or wall’s total R-value will usually be lower than the R-value of the insulation, mainly due to thermal bridging (increased conduction) that occurs through studs or joists because of their lower thermal resistance. Oak Ridge National Laboratory offers a whole-wall R-value calculator at [www.ornl.gov/sci/roofs+walls/AWT/InteractiveCalculators/rvalueinfo.htm](http://www.ornl.gov/sci/roofs+walls/AWT/InteractiveCalculators/rvalueinfo.htm).

—Claire Anderson

energy system or the local power company, is measured in kilowatt-hours (kWh). Natural gas is typically measured in “therms,” the energy content of the gas consumed. If you buy these fuels from a utility, you’ll find monthly consumption numbers reported on your bills. Fuel-oil consumption is measured in gallons. Oil consumption from a tank can be read using a dipstick, but the stick needs to be calibrated for the specific tank.

In any case, you want to measure your actual energy consumption, not use a dollar energy cost that’s subject to the ups and downs of market forces.

## Taking Temperatures

When you’re measuring temperature, give some forethought to where the sensors and thermometers are located.

According to NOAA guidelines ([www.nws.noaa.gov/om/coop/standard.htm](http://www.nws.noaa.gov/om/coop/standard.htm)), surface air temperature measurements for meteorological purposes are taken at 5 feet above the ground. This height is representative of people’s living and working proximities.

Because the goal is to measure the temperature of free-flowing air, it is necessary to ensure that the thermometer or sensor is reading the heat flux to or from the air—and not other sources, like direct sunlight. A sensor mounted on the wall of a building will measure some useless combination of the surrounding air and the building material’s temperatures.

A small, louvered box painted with bright white paint may serve the do-it-yourself about as well as commercially available aspirated sun shields. NOAA’s guidelines also call for the sensor to be no closer to an obstruction than four times the height of the obstruction, and to be at least 100 feet from any paved or concrete surface.

In addition to old-fashioned thermometers, electronic sensors are available, some with wireless communication between the outdoor sensor and an indoor display.

—Fred Rogers

Insulation upgrades included rigid foam-board (at left) over R-21 fiberglass batts (on right).



Courtesy Fred Rogers

INSULATION ZONES

The U.S. Department of Energy provides minimum recommended R-values for homes based on climate, heating source, and the space needing insulation, such as attics, basements, or walls (see map below right). Consider exceeding these levels (superinsulating) for maximum energy efficiency. You'll need to compare the life-cycle savings to your initial insulation budget to figure out the best return for your investment.


If you have a limited budget for insulation, experts recommend insulating your attic or ceiling first. Compared to floors and walls, attics are a major contributor to a home's heat gain and loss, and bundling up an attic can shave up to 30% from your energy usage. Besides having a large surface area for heat transfer, attics commonly have other conduits for air infiltration, such as light fixtures, plumbing and electrical chases, chimneys, exhaust fans, and ducts. Together, these can account for more heat transfer than the *entire* flat surface of your attic (see the "Don't Forget Ducts" sidebar).

Next, insulate walls and floors. In new homes, adequately insulating walls is a no-brainer. In older homes, however, it may be an expensive and difficult task. Get an estimate first, and then do the math to see how long it will take to recoup your investment at a 16% to 20% savings on your heating and cooling. Insulating crawl spaces and underneath floors can save 5% to 15% on heating energy, and is usually an easier job.

—Claire Anderson

Insulation Recommendations for New Wood-Framed Houses

Zone	Heating System	Attic	Cathedral Ceiling	Wall		Floor
				Cavity	Insulation Sheathing	
1	All types	R-30–R-49	R-22–R-38	R-13–R-15	None	R-13
2	Gas, oil, heat pump	R-30–R-60	R-22–R-38	R-13–R-15	None	R-13
	Electric furnace	R-30–R-60	R-22–R-38	R-13–R-15	None	R-19–R-25
3	Gas, oil, heat pump	R-30–R-60	R-22–R-38	R-13–R-15	None	R-25
	Electric furnace	R-30–R-60	R-22–R-38	R-13–R-15	R-2.5–R-5	R-25
4	Gas, oil, heat pump	R-38–R-60	R-30–R-38	R-13–R-15	R-2.5–R-6	R-25–R-30
	Electric furnace	R-38–R-60	R-30–R-38	R-13–R-15	R-5–R-6	R-25–R-30
5	Gas, oil, heat pump	R-38–R-60	R-30–R-38	R-13–R-15	R-2.5–R-6	R-25–R-30
	Electric furnace	R-38–R-60	R-30–R-60	R-13–R-21	R-5–R-6	R-25–R-30
6	All types	R-49–R-60	R-30–R-60	R-13–R-21	R-5–R-6	R-25–R-30
7	All types	R-49–R-60	R-30–R-60	R-13–R-21	R-5–R-6	R-25–R-30
8	All types	R-49–R-60	R-30–R-60	R-13–R-21	R-5–R-6	R-25–R-30

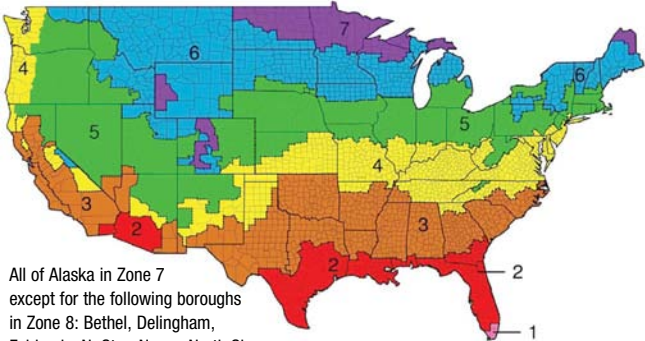

All of Alaska in Zone 7 except for the following boroughs in Zone 8: Bethel, Delingham, Fairbanks N. Star, Nome, North Slope Northwest Arctic, Southeast Fairbanks, Wade Hampton, Yukon-Koyukuk

Recommendations for Existing Wood-Framed Houses

Zone	Add Insulation to Attic		Uninsulated Wood-Frame	Wall		Floor
	Uninsulated Attic	Existing 3–4 In. of Insulation		Uninsulated Wood-Frame	Insulated Wood-Frame	
1	R-30–R-49	R-25–R-30	Fill with blow-in	None extra	None extra	R-13
2	R-30–R-60	R-25–R-38	Fill with blow-in	None extra	None extra	R-13–R-19
3	R-30–R-60	R-25–R-38	Fill with blow-in, add R-5 wall sheathing under new siding	None extra	None extra	R-19–R-25
4	R-38–R-60	R-38	Fill with blow-in, add R-5 wall sheathing under new siding	Add R-5 wall sheathing under new siding	Add R-5 wall sheathing under new siding	R-25–R-30
5	R-49–R-60	R-38–R-49	Fill with blow-in, add R-5–R-6 wall sheathing under new siding	Add R-5 wall sheathing under new siding	Add R-5 wall sheathing under new siding	R-25–R-30
6	R-49–R-60	R-38–R-49	Fill with blow-in, add R-5–R-6 wall sheathing under new siding	Add R-5 wall sheathing under new siding	Add R-5 wall sheathing under new siding	R-25–R-30
7	R-49–R-60	R-38–R-49	Fill with blow-in, add R-5–R-6 wall sheathing under new siding	Add R-5 wall sheathing under new siding	Add R-5 wall sheathing under new siding	R-25–R-30
8	R-49–R-60	R-38–R-49	Fill with blow-in, add R-5–R-6 wall sheathing under new siding	Add R-5 wall sheathing under new siding	Add R-5 wall sheathing under new siding	R-25–R-30

Map and data courtesy U.S. DOE



During the main heating months of November through February (2005–2006 and 2009–2010), we used 80 to 136 therms of natural gas per month. (During that same period, the cost per therm varied from \$0.98 to \$1.22, which demonstrates why you cannot base your energy use calculations on billing dollar amounts.)

## The Weather Factor

Reno, Nevada, is a high-desert environment subject to moderately cold winters. Our average temperatures for November, December, January, and February are 40.9, 33.6, 33.6, and 38.5°F respectively. But these are averages derived over decades; what we wanted was the monthly average for specific months—say December of 2008 and 2009—since we wanted to be able to take colder or warmer months into account as we examined our energy use.

Heating and ventilating engineers often use “heating degree-days” (HDD) as an index of the amount of heat needed to maintain comfortable surroundings for people occupying homes or businesses. HDD are defined as 65°F minus the average temperature for one or more days. In Reno last December, with an average temperature of 26.9°F, our HDD total for the month was (65°F - 26.9°F) times 31 days, or about 1,181 HDD. (December 2008 was milder, with 952 HDD.)



Courtesy Fred Rogers

**Having the wall open for insulating made it easier to replace the old single-pane windows with more energy-efficient ones.**

## Don't Forget Ducts

After ceilings, floors, and walls, ductwork can account for up to 15% of a home's winter heat loss, according to the U.S. Department of Energy. This network of tubes in a home's walls, floors, and ceilings distributes conditioned air to the rooms in your home. Most systems, unless they're relatively new, are uninsulated or not insulated properly. And uninsulated and leaky ducts translate into energy dollars down the drain.

Insulating and sealing ducts is especially important if they are located in unconditioned spaces. In the wintertime, ducts can leak heat, and in the summertime, they can draw in hot air, decreasing your central air-conditioning system's efficiency.

Minor duct repairs are easy to do yourself, but you may want to consult a pro to test, insulate, and seal ducts in unconditioned spaces. First look for sections that should be joined, but have separated, and then look for obvious holes. Seal your ducts with Underwriters Laboratories (UL) certified tape to ensure a long-lasting bond. Insulating ducts in a basement will make the basement colder in winter, so if both the ducts and the basement walls are uninsulated, consider insulating both. To help prevent condensation on cooling ducts, make sure there's a well-sealed vapor barrier on the outside of the insulation. In most areas, use duct wrap insulation of R-4 or R-6.

—Claire Anderson

Average temperature data for specific months in specific years is available for various cities through the National Oceanographic & Atmospheric Administration's (NOAA) Regional Climate Centers (see Access). If you live close enough to one of these cities, you can probably use NOAA's HDD data. However, you will need to judge whether or not the temperature variations at the official measurement site are similar to those at your house, since microclimate variations can be significant depending on heat-island effects (i.e., the prevalence of buildings and pavement); elevation differences; and proximity to water. It's important that the official site's temperature rises and falls roughly in proportion to what you observe at home, but absolute accuracy isn't necessary. You just want reliable and consistent HDD data to take into account warmer and cooler months as you examine your energy consumption.

If you can't find HDD data from an official site close enough to your home, you can probably find monthly average temperature data for a nearby site and calculate your own HDD numbers. You can also install your own thermometer and measure maximum, minimum, and average temperatures at your home (see “Taking Temperatures” sidebar). Automatic digital systems will record the data even if you're away, but the siting of the temperature sensor is somewhat critical.

Using HDD allows comparing, for example, my energy use in December 2008 to that of December 2009—taking warmer or cooler weather conditions into account.

## Insulation Comparison

Loose Fill	R-Value Per Inch*	R-Value Per Thickness*
Fiberglass	2.2–2.9	–
Rock wool	2.2–2.9	–
Cellulose	3.1–3.7	–

Batts	R-Value Per Inch*	R-Value Per Thickness*
Fiberglass	2.9–3.8	–
Wool	3.5	–
Cotton	3–3.7	–


Rigid Board	R-Value Per Inch*	R-Value Per Thickness*
EPS	3.9–4.2	–
XPS	5.0	–
Polyisocyanurate	5.6–7	–

Liquid Foam	R-Value Per Inch*	R-Value Per Thickness*
Cementitious foam	3.9	–
Polyurethane	5.6–6.2	–

Other	R-Value Per Inch*	R-Value Per Thickness*
Straw bale	1.5	–
Straw-clay	1.6	–
Rastra (8 in. thick block)	–	11.0
SIPs (3.5–9.38 in. thick)	–	14.0–37.0
ICFs (10 in. thick)	–	17.0–26.0

\*All values are estimates; total R-value will vary depending on material and installation techniques.


## Results of Efficiency & Insulation Improvements

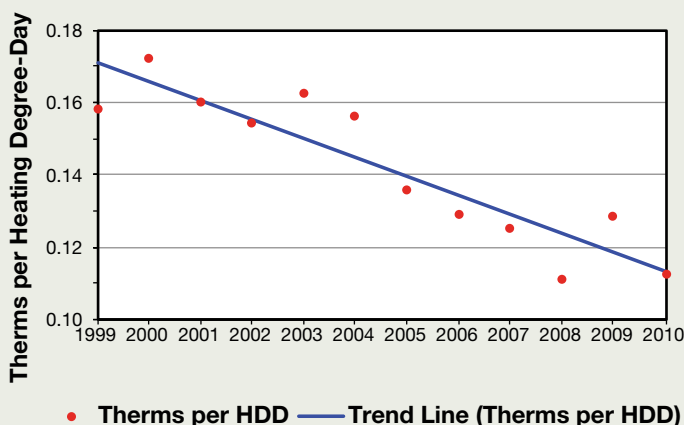

### Our Reno Example

A Carrier 132,000 Btu, 80% efficient natural gas furnace replaced the original oil burner and it has heated our home since 1995. We have monthly data showing the amount of therms consumed since 1999. We concluded that National Weather Service monthly average temperature data from Reno International Airport (about 4 miles away) would serve our purpose as an index of major monthly temperature changes.

## Reno Avg. Temperature & Heating Degree-Days\*

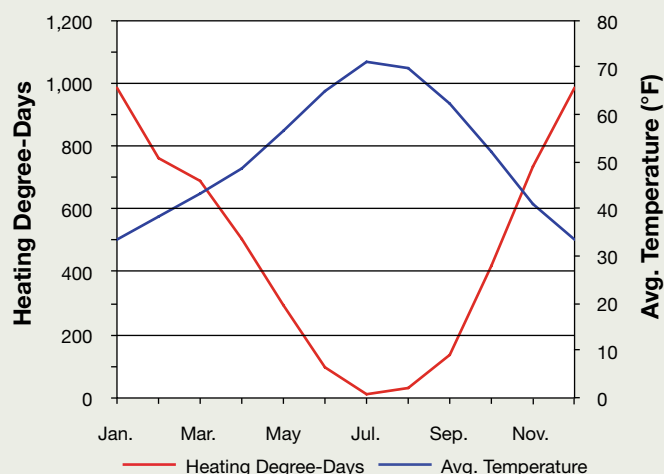

\*1971–2000

The “Results” graph shows the amount of natural gas used to heat our house, divided by the number of HDDs, averaged over our two coldest months, December and January. The downward trend reflects our year-after-year insulation and efficiency efforts, equaling about 40% over 12 years..

Of course, 12 years aren’t needed for this kind of study. For example, if you’re interested in examining your energy consumption before and after an insulation retrofit, collect your fuel-usage numbers for a couple years before and after the work, and then obtain or calculate HDD for the winter months for those years. Plot your data to see if there’s a significant reduction following your insulation project, then you’ll be able to clearly visualize the benefits of your work.

### Access

C.F. (Fred) Rogers, Ph.D., is a retired atmospheric scientist. His current interests include looking for good science education materials for his grandchildren and composing a Web site honoring a pioneering cloud physicist.

HDD data for selected cities • [www.cpc.noaa.gov/products/analysis\\_monitoring/cdus/degree\\_days](http://www.cpc.noaa.gov/products/analysis_monitoring/cdus/degree_days)

National Oceanic & Atmospheric Administration (NOAA) regional climate centers • [www.ncdc.noaa.gov/oa/climate/regionalclimatecenters.html](http://www.ncdc.noaa.gov/oa/climate/regionalclimatecenters.html)

Many thanks to Jim Ashby, Michelle Breckner, and Kelly Redmond at the Western Regional Climate Center for their help in accessing the wealth of temperature data on the WRCC web site. Thanks also to Adrienne Furman at Nevada Energy, who kindly helped me recover missing natural gas consumption data from the early years of this study.





# HARNESS THE POWER.

## MAXIMIZE SOLAR POWER WITH MAXIMUM PROTECTION FOR YOUR PV SYSTEM

As solar power systems become increasingly popular, so does the need for high amperage circuit protection. But how do you harness all of that precious power while ensuring the safety of your family, friends, co-workers and property? With E-Series circuit breakers by Carling Technologies. Our circuit breakers utilize the hydraulic/magnetic principle, providing key advantages over fuses and thermal breakers. The E-series offers superior handling of up to 125A per pole, and is rated to 600V AC or DC through its compact and innovative design – providing high endurance, resistance to extreme temperatures and advanced protection for equipment and wires. So, ask for Carling circuit breakers, and keep your PV system safe and productive while capturing that pure power!



Since 1920, Carling Technologies has been recognized as a world leader in the custom manufacture of circuit breakers, electrical switches and assemblies, power distribution centers, digital switching systems, and electronic controls.



**Carling Technologies™**

Innovative Designs. Powerful Solutions.

[www.carlingtech.com/E-series](http://www.carlingtech.com/E-series)




**Brushless DC Submersible Pumps**  
up to 2 HP. Heads up to 700 feet  
and flow rates up to 200 GPM.



**Diaphragm Submersible Pumps**  
with heads up to  
230 feet and flow rates  
up to 5 GPM.



**DC Pool Circulating Pumps**  
from ½ HP to 1 ½ HP.



**Complete Solar Pumping Systems.** Ranging from 1/4 HP up to 3 HP for our standard pump line and up to 30 HP for our custom solar systems.

**Phone:** 1-800-370-8115  
(928) 348-9652  
**Fax:** (928) 348-9653

[www.sunpumps.com](http://www.sunpumps.com)

**SHARP**®



## **LABEL-WRIGHT**

**SAFETY & IDENTIFICATION LABELING**

**Safety & Identification Labeling  
for Mechanical & Electrical Systems,  
Components & Renewable Energy Systems**

- ANSI Z535.4 & ISO 3864-2 Safety Labels
- NEC Article 690 Code Compliant Labels
- Experience in Utility System & Component Labeling
- Facilities Signage

**PO Box 1322 | Boone, NC 28607**  
**(866) 356-8911**  
[www.Label-Wright.com](http://www.Label-Wright.com)



**SUNEARTH inc.**  
Quality Solar Energy Products

**THINK THERMAL-  
THINK SUNEARTH**



The Empire Series Liquid Flat Plate Collector

**[www.sunearthinc.com](http://www.sunearthinc.com)**

**SunEarth, Inc.**

8425 Almeria Avenue, Fontana, CA 92335  
(909) 434-3100, FAX (909) 434-3101  
Distributor inquiries welcome.



# Pre - Wired by MidNite Solar

**The industry's best do it yourself system just got easier!**

MidNite Solar is now offering pre-assembled & tested systems, drop shipped direct to your door.

**Order from your local dealer.**

**Check our website for all the configurations offered.**  
**[www.midnitesolar.com](http://www.midnitesolar.com)**



**Magnum Energy 120VAC**

Magnum MS4024 4000W/24VDC  
ME-RC50 remote display  
Surge arrestor on AC input & output  
Surge arrestor on +/- PV input  
MidNite Solar MNE250STM-L E-Pnl  
Two 63 amp charge control breakers  
FM60 or Classic 150 installed  
(Classic 150 available 2nd quarter 2010)  
2 bat temp sensors installed  
Tested & crated

**Price \$4925.00**

Options: FM80 or Classic200 or 250  
DC-GFP for FM series (NR on Classic)



**Magnum Energy 120/240VAC**

Magnum MS4024-AE 120/240VAC or  
Magnum 4448-AE 120/240VAC  
ME-RC50 remote display  
Surge arrestor on AC input & output  
Surge arrestor on +/- PV input  
MidNite Solar MNEXXXSTM-240-L E-PNL  
Two 63 amp charge control breakers  
FM60 or Classic 150 installed  
(Classic 150 available 2nd quarter 2010)  
2 bat temp sensors installed  
Tested & crated

**Price: \$5299.00**

Options: FM80 or Classic200 or 250  
DC-GFP for FM series (NR on Classic)



**OutBack 120VAC**

OutBack VFX3524 or VFX3648  
Grid-tie or Off-grid  
Mate remote display  
Surge arrestor on AC input & output  
Surge arrestor on +/- PV input  
MidNite Solar MNEXXXSTS-L E-Pnl  
Two 63 amp charge control breakers  
FM60 or Classic 150 installed  
(Classic 150 available 2nd quarter 2010)  
2 bat temp sensors installed  
Tested & crated

**Price: \$4975.00**

Options: FM80 or Classic200 or 250  
DC-GFP for FM series (NR on Classic)




**OutBack 120VAC Aluminum**

Out Back VFX3524 or VFX3648  
Grid-tie or Off-grid  
Mate remote display  
Surge arrestor on AC input & output  
Surge arrestor on +/- PV input  
MidNite Solar MNEXXXALPlus-E-Pnl  
Two 63 amp charge control breakers  
FM60 or Classic 150 installed  
2 bat temp sensors installed  
Tested & crated  
**Price: \$4999.00**

Options: FM80 or Classic200 or 250  
DC-GFP for FM series (NR on Classic)

Remote display

Magnum ME-BMK

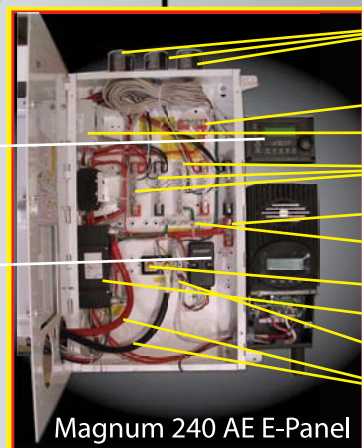


**Magnum 240 AE E-Panel**

Lightning Arrestors  
PV + Busbar  
AC In/Out/Bypass  
AC Busbars  
Battery + Busbar  
GND Busbar  
500A/50mV Shunt  
Inverter Breaker  
Battery - Busbar  
Inverter Cables

Inverter

Charge Control Breakers & DC-GFP

Charge Controller

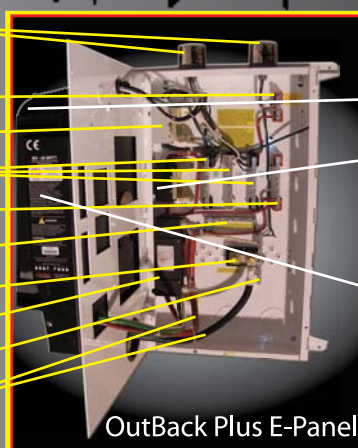

**OutBack Plus E-Panel**

Note: The following Solar distributors have been manufacturing pre-wired MidNite systems for many years. They will continue to provide systems manufactured by themselves or MidNite. These distributors may be able to provide customization beyond the standard systems offered by MidNite solar.



**17722 67th Ave NE Unit C, Arlington WA 98223**

**425-374-9060 [www.midnitesolar.com](http://www.midnitesolar.com)**

# Solar Energy Pure and Simple Off-Grid & Remote Solar Specialists

Design, Sales, Installation and Support for Do-It-Yourselfers

- Packaged systems, fully programmed and ready for operation
- 10 years off-grid installation experience
- Electrical schematics
- Customer Service - Monday-Saturday

## Apex Solar

Get answers from people who live with renewable energy:

Toll free: 888-782-0706

[www.apxsolar.com](http://www.apxsolar.com)



## Efficient & flexible:



**steca**  
[www.steca.com](http://www.steca.com)



### Steca Solarix PI sine wave inverter

- most flexible home power inverter
- latest energy saving technology
- easy parallelizing option with modular plug & play concept



### Steca Solarix MPPT 2010 charge controller

- highest DC-DC conversion efficiency
- latest MPPT technology
- robust and suitable for all modules



Steca Elektronik GmbH | Germany

For further information please contact: [christoph.kocsis@stecasolar.com](mailto:christoph.kocsis@stecasolar.com) | [www.stecasolar.com](http://www.stecasolar.com)

## HYDROSCREEN CO. LLC

### Precision Wedge Wire Coanda Screens

- Self Cleaning
- Easy Installation
- High Capacity
- No moving parts
- Pipe, ramp and box mountings

Hydro, Agricultural, & Domestic Diversions from 10 gpm to 500 cfs

Visit us at [www.hydroscreen.com](http://www.hydroscreen.com)  
or call (303) 333-6071  
e-mail [RKWEIR@AOL.COM](mailto:RKWEIR@AOL.COM)

*We don't just sell screens, we engineer solutions!*

## Attention School Libraries


Free subscriptions to Home Power for K-12 school libraries, no strings attached, from the nonprofit Redwood Alliance.

[www.hpmag.org](http://www.hpmag.org)





## GAIN HANDS-ON EXPERIENCE

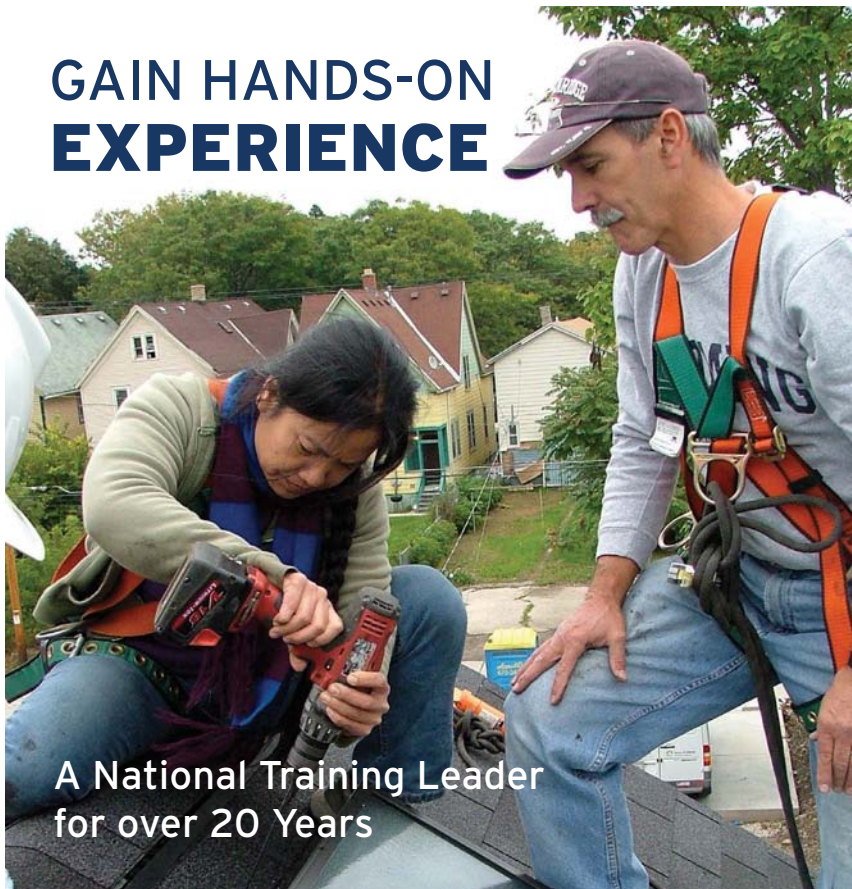

A National Training Leader  
for over 20 Years

## RENEWABLE ENERGY WORKSHOPS & LEAD INSTALLER TRAININGS

Wind  
Solar Hot Water  
Photovoltaics  
Sustainable Building

Get "Lead Install" credit for  
NABCEP test requirements.

Full workshop schedule available  
at [www.the-mrea.org](http://www.the-mrea.org).




midwest  
renewable energy  
association

Custer Office: 715-592-6595 • [info@the-mrea.org](mailto:info@the-mrea.org)

Milwaukee Office: 414-431-0758 • [mke@the-mrea.org](mailto:mke@the-mrea.org)

[www.the-mrea.org](http://www.the-mrea.org)



## SOLAR HOT WATER

IS AFFORDABLE


30% FEDERAL TAX  
CREDIT

"Solar Wand"  
In Your  
Existing Tank

858-259-8895

**BUTLER**  
SUN SOLUTIONS INC.

[www.butlersunsolutions.com](http://www.butlersunsolutions.com)

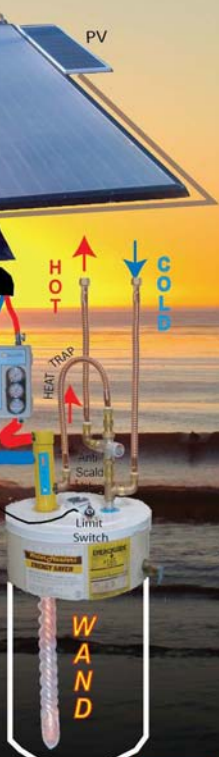

## BATTERY CAPACITY METER

*Keep your batteries  
alive longer*

Midnite has a new  
voltage based battery  
capacity meter. This  
meter was designed  
for our Africa  
distributor to aid in  
keeping batteries  
alive longer.



Features:

1. Led's that correspond to battery voltage
2. Accuracy +/- 1%
3. Auto sensing for 12, 24, 36, and 48 volt batteries
4. LED indicators show if batteries have received a full charge recently, longer than one week or longer than two weeks
5. Indicates lack of charging that can lead to sulfation
6. Ideal for "at a glance" readings from across the room, for golf carts, forklifts, etc.

**\$69** Retail

**MIDNITE**  
SOLAR, INC.

[www.midnitesolar.com](http://www.midnitesolar.com)



# code corner

## Ungrounded PV Systems

by John Wiles

More than 100 years ago, the debate on grounded versus ungrounded electrical systems began. The United States went with grounded, while many other countries went with ungrounded. The PV codes in the United States are now allowing some equipment that is used in other parts of the world.

When we discuss grounded versus ungrounded electrical systems, we are addressing whether one of the current-carrying circuit conductors, like the AC neutral conductor, is grounded or not. Except for ungrounded, three-phase delta-connected transmission and distribution systems, most of our electrical systems in the United States have a grounded circuit conductor. In Europe and elsewhere, ungrounded electrical systems are common. In Germany, ungrounded three-phase AC power at 230 V comes directly into dwellings.

To some extent, most electrical systems in developed countries use a system of equipment-grounding conductors—called protective earth (PE) in Europe—to provide an outer layer of defense against electrical shock from exposed conductive surfaces that could become energized. As in the United States, double-insulated appliances and electrical tools can be found that do not require equipment-grounding systems.

History, equipment, training, and experiences on both sides of the issue show that both systems provide equal levels of safety. As the world grows smaller, IEC standards in Europe are being harmonized with the standards developed by Underwriters Laboratories (UL) here in the United States—and the codes are slowly adopting similar requirements and allowances.

### Impact on PV System Design

Since 1984, when PV requirements first appeared in the *National Electrical Code*, PV systems installed in the United States have been required to have a grounded circuit conductor. PV systems with maximum system voltages of 50 V or below were not required to have a grounded circuit conductor. In the 2005 NEC, Section 690.35 was added to permit the use of ungrounded PV arrays. Ungrounded PV arrays do not have a conductor directly connected to the grounding electrode system like grounded arrays do. The ungrounded systems will still be required to use equipment grounding conductors, though, to provide protection from shock. Typically, these ungrounded PV arrays will operate at 125 V and up, but no

specific voltage range or limit is imposed. Of course, Section 690.7 restricts residential PV arrays to 600 V, either grounded or ungrounded.

In utility-interactive PV systems, the inverter is a switching device and filter, with other added control components. The switch reverses the polarity of the DC output from the PV array 120 times per second, generating a 60 Hz wave form that is shaped into a sine wave by the filter. In Europe, 100 switches per second are used to generate 50 Hz.

Because European PV arrays and electrical systems are ungrounded, their utility-interactive inverters are relatively simple compared to U.S. inverters. In the United States, with a grounded circuit conductor from the PV array and a grounded circuit conductor in the AC inverter output circuit, using a direct switching device is not possible—the switch would be shorted as it tried to reverse the polarity of the DC circuit into an AC signal. A transformer is



**SMA Sunny Boy 9 kW  
transformerless inverter.**



## Microinverter & AC PV Module Details

NEC requirements for microinverters, combinations of microinverters attached to PV modules, and AC PV modules continue to pose some confusion to installers and inspectors alike.

Both microinverters and microinverters attached to PV modules in the field or in the factory that have any exposed DC single conductor cables are required to meet all of the NEC's DC wiring requirements. These may include Section 690.5 ground-fault detector requirements, DC and AC disconnect requirements (potentially handled by connectors listed as disconnects), and inverter DC grounding-electrode requirements.

True AC PV modules, as defined on Sections 690.2 and 690.6, have a module and inverter factory-assembled as one environmentally protected unit—there is no accessible DC wiring, so none of the Code's DC wiring requirements apply. A single equipment-grounding connection will usually be the only requirement to properly ground an AC PV module.

required in inverters used in the United States to isolate the grounded DC circuits from the grounded AC circuits. The transformer is usually heavy, costly, and bulky—decreasing efficiency and increasing the inverter's size and shipping costs.

With the advent of Section 690.35 of the 2005 NEC, ungrounded PV arrays can be installed in the United States, using transformerless inverters now listed to UL Standard 1741. Several inverters are on the market now. So what are these systems going to look like to PV installers and inspectors?

### Ungrounded Perspective

Ungrounded PV systems are not significantly different from common grounded PV systems found in the United States: They will continue to have equipment-grounding conductors that will connect the module frames, racks, enclosures of combiners, disconnects, and inverters together and to ground (in Europe, called "earth").

According to NEC Section 690.35 (B), DC overcurrent protection (for three or more strings of modules) will be required in both of the ungrounded circuit conductors. PV string combiners will have overcurrent protection in both the positive and negative DC inputs from each string of modules.

The PV DC disconnect will be required in both of the ungrounded conductors (690.35(A)). With disconnects required in each ungrounded circuit conductor, external and internal disconnects will have a switch pole in each of the circuit conductors coming from the PV array.

Ampacity calculations will be the same for grounded and ungrounded systems, and the calculations for maximum

system voltage will be the same. The white color code for a grounded conductor *will no longer be used*. It is logical that the color code of red for a positive conductor and black for a negative conductor be used, but there is no Code requirement that these colors be used. As before, the module interconnecting cable and other short runs of exposed, single conductor cables will usually have black insulation (for superior UV resistance) with colored markings used for identification.

All exposed, single-conductor cables, including those attached directly to the module, must be the new PV Wire or PV Cable made and listed to UL Standard 4703 (690.35(D) (3)). The USE-2 conductors used in many applications for grounded PV arrays are not acceptable in these systems. Installers and inspectors should be aware that some of the European PV cables, PV wires, or other cables with similar names made for the European market (and even made to UL Standard 4703) may use fine-stranded, flexible conductors. Obtaining suitable lugs and terminals for use where these cables transition to a conduit wiring method may be difficult (see NEC 690.31(F) and *Code Corner 104* for details).

The inverter must be listed and clearly marked for use with ungrounded PV arrays, and it must have an appropriate internal ground-fault detection and indication system (690.35(C)). That ground-fault circuit will not be required to interrupt the ground-fault current (as is required on grounded PV arrays) on an ungrounded system, since there will be no ground-fault currents. The inverter or charge controller will be required to shut down and indicate that a ground fault has occurred.

### Access

John Wiles (jwiles@nmsu.edu; 575-646-6105) works at the Institute for Energy and the Environment at New Mexico State University. John provides engineering support to the PV industry and a focal point for PV system code issues.

Southwest Technology Development Institute • [www.nmsu.edu/~tdi/Photovoltaics/Codes-Stds/Codes-Stds.html](http://www.nmsu.edu/~tdi/Photovoltaics/Codes-Stds/Codes-Stds.html) • PV systems inspector/installer checklist, previous "Perspectives on PV" and *Code Corner* articles, and *Photovoltaic Power Systems & the 2005 National Electrical Code: Suggested Practices*, by John Wiles





**RAE**  
STORAGE BATTERY  
ESTABLISHED 1945

Authorized *Rolls* Battery Dealer  
[www.raestoragebattery.com](http://www.raestoragebattery.com)

Renewable energy does not mean continuous energy. Therefore, you must have dependable, reliable batteries...

**Rolls, the World's Best.**

- Unsurpassed cycling
- Industry's largest liquid reserve
- 10 & 15 year average life span\*
- 7 & 10 year warranties\*

\* 4000 Series - 7 yr warranty / 5000 Series - 10 yr warranty



Phone 860.828.6007

Fax 860.828.4540

POB 8005 Berlin, CT 06037

# AAA Solar Supply Inc.

FEATURING:


## SUNEARTH

**Liquid Collectors  
for Solar Hot Water  
& Radiant Floor Systems**

**Other Solar H<sub>2</sub>O  
Products & Parts**

- Pumps
- Heat Exchangers
- Storage Tanks
- Complete Systems
- Controls
- Batch Water Heaters


Serving the Solar Industry Since 1979

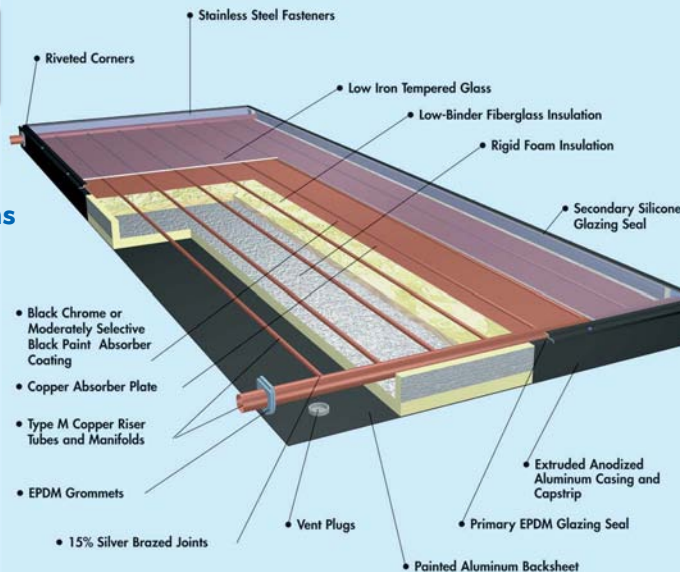

Also Featuring:

## SUN AIRE

**Air Collectors  
for Home Heating**




**Other Solar Hot Air  
Products & Parts**

- Blowers
- Backdraft Dampers
- Controls
- DIY Systems

**(800) 245-0311 • [www.aaasolar.com](http://www.aaasolar.com) • [solarstuff@aaasolar.com](mailto:solarstuff@aaasolar.com)**

2021 Zearing NW, Albuquerque, NM 87014

Off Grid? Have flowing water?  
Light up your life!

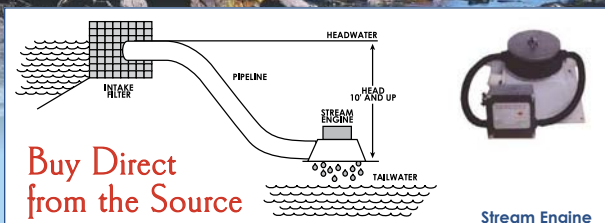

**Low head turbine:**


- Works with heads of 2 to 10 feet and large flows
- Low flow runner option

**Higher head turbine:**

- Operates at heads of 10 feet and up
- High output wheel option for heads over 50 feet

**Both turbines:**

- Use permanent magnet brushless alternators
- Charge 12, 24, 48 Volt batteries or higher voltage for long distance
- Have cast bronze runners
- Generate up to 1KW or more at best sites

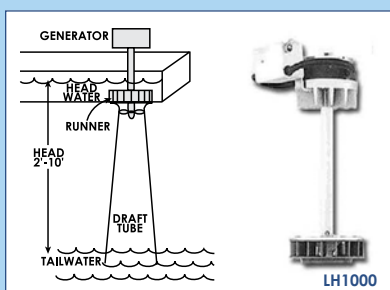

**Energy Systems & Design**

"Innovative turbines since 1980"  
Manufacturing cost-effective water powered generators

For more information:  
[www.microhydropower.com](http://www.microhydropower.com)  
506-433-3151

[acgreenenergy.com](http://acgreenenergy.com)  
866-WND-PWRD



**A&C GREENENERGY**  
Renewable Energy for Life

**PowerMax+**  
WIND TURBINE GENERATORS

**VARIABLE PITCH technology**

Complete systems  
5 year Warranty  
400W-50kW  
High Speed  
Low Speed  
Grid-Tie  
Off-Grid

**DISTRIBUTORSHIPS AVAILABLE**

Complete DIY kits  
Blades  
Hubs  
Nose Cones  
Magnets  
Magnet Wire  
Controllers  
Inverters  
Solar Panels  
Batteries  
Guy-wire Poles  
Monopoles  
Hydraulic Poles  
Hybrid Solutions


[magnet4sale.com](http://magnet4sale.com)  
866-342-1300





## Solar Hot Water with Internal Electric Backup One Tank Solution

Solar Heat Exchange Manufacturing (SHEM) offers a full line of solar thermal products. Our patented drainback systems provide 70-80% of your annual hot water using clean, renewable solar energy. The SHEM 80E is equipped with an internal electric element that provides hot water when the sun doesn't shine. The SHEM 80E is a one tank solution providing reliable hot water 365 days a year.



### ✓ SHEM 80E Features

- 10-year limited tank warranty, 25+ expected life
- Freeze protected, even in harsh climates
- Factory assembled, wired, & programmed
- Industry highest-efficiency heat exchanger
- 3900 watt electrical element backup
- Sizing & installation support
- Easily adapted for radiant heat
- 22½" diameter X 72" height
- SRCC OG-300 rated (pending) with Solene Aurora collectors
- Dealer inquiries welcome

[www.simpLEDrainback.com](http://www.simpLEDrainback.com) ♦ (888) SUN-4H2O or (888) 786-4426



**Solar Heat Exchange Manufacturing**  
standard & custom engineered solar hot water systems

## ZOMEWORKS CORPORATION

Passive Energy Products

### Trackers increase the daily output of modules by as much as 50% in water pumping applications

Email: [zomework@zomeworks.com](mailto:zomework@zomeworks.com)  
Phone: 800-279-6342  
Website: [www.zomeworks.com](http://www.zomeworks.com)

PHOTO COURTESY  
OF SUN PUMPS

**NEXTEK Fanworks**



## VARI-CYCLONE DC CEILING FAN

The only DC powered ceiling fan with the Gossamer Wind designed blade from the Florida Solar Energy Center. Installed all over the world.

3 & 4 blade options • 60" blade diameter •  
stainless steel kit available for high humidity  
environments • 12/24 VDC only

[www.fanworks.com](http://www.fanworks.com)  
800-529-6306

**FANNING THE GLOBE**

WHY RENT YOUR POWER WHEN YOU CAN OWN IT?

## SolMan

MOBILE SOLAR  
GENERATOR



- 120v AC or 12v DC
- 3 - 100 Amp/Hr Batteries
- 1500w Inverter/Charger

Plug & Play - Point of use renewable energy for home, work or recreation.

Clean, Silent, and Portable  
No Gas - No Fumes - No Hassle

Designed and Produced in America  
for High Quality and Lasting Value



**SOL**  
SOLUTIONS  
INTEGRATED SOLUTIONS  
FOR ENERGY INDEPENDENCE

Special Expandable Option:  
Add 2 Extra PV Panels

ALSO 600w smaller SolMan unit  
&  
2000w Lithium Battery Model  
now available!

[www.sol-solutions.com](http://www.sol-solutions.com) • 800-828-2965  
515 S. Main Street, Hwy 101, Willits, CA, 95490

# Learning to Jøtul


by Kathleen Jarschke-Schultze

Early last spring, my husband Bob-O and I ordered new parts for our 30-year-old wood heater. It was our only source of heat other than the solar gain that comes weakly through the south-facing windows.

After arduous searching, we thought we found a company that would provide new burn plates, which hang on the heater's inside walls and take the brunt of the heat. The old ones were cracked and warped so much they would hang only tenuously, falling off their perch when jostled by loading firewood. The heater has to be cool before the plates can be rehung, so they spent a good deal of the winter propped up against the inside of the heater.

After waiting six months for delivery and not having our phone calls or e-mails returned, we came to grips with the fact that instead of fixing our old one, we would be buying a new heater. But we really liked the old heater: After 20 winters, we were old friends and had no secrets or surprises between us. I could get a roaring fire going fairly quickly and keep the coals all night. My little heat-powered Eco Fan sitting on top of the stove would still be turning its blades, albeit slowly, in the morning. We called our friend, Bill Battagin of Feather River Solar and Stoveworks, and he recommended a Jøtul Black Bear, almost exactly the same size as our old heater.

Eg grev ned min eld—sent om kveld—naar  
dagen er slut gud gje min eld alder slokna ut.

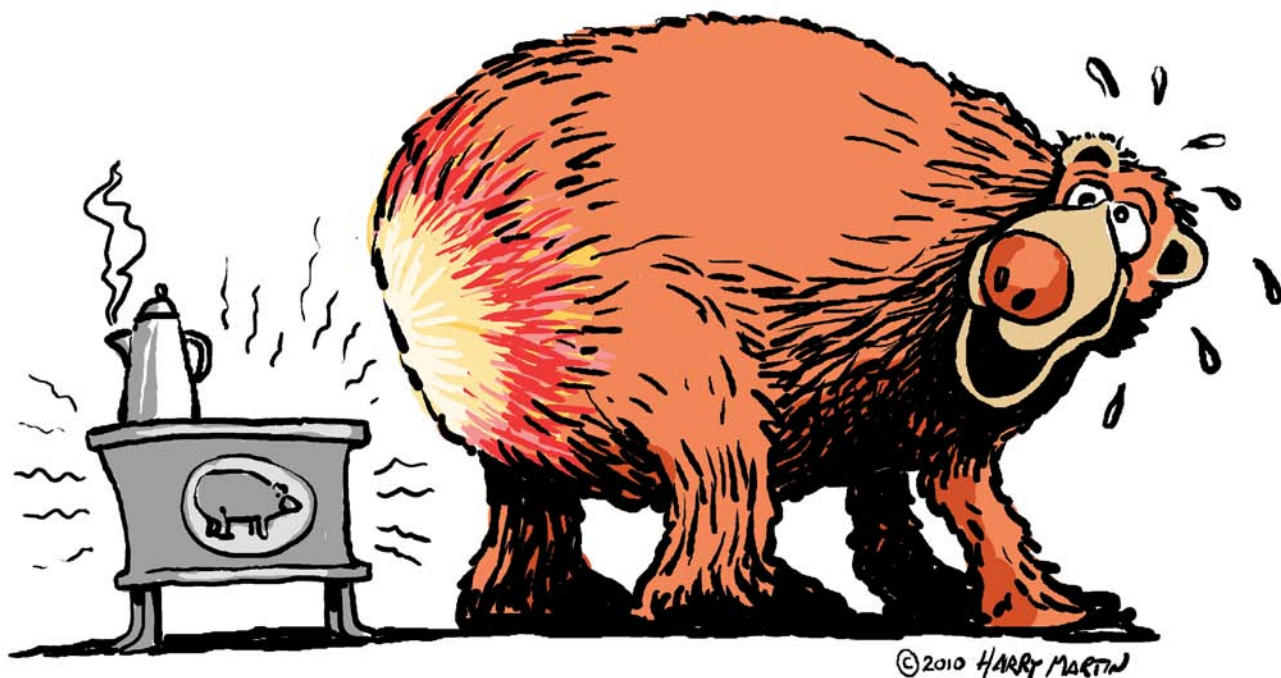

©2010 HARRY MARTIN



While I loved the old Waterford, I have to admit that the Jøtul is much prettier. An image of a black bear is cast into the long sides. On the front, the Norwegian words cast into the iron roughly translate to “I built me a flame late one night. When day is done, God will my flame never die out.” Heady stuff for a heater. I took it as artistic license.

## Fire Tender

We loved the looks of the new heater, but were curious if it could hold a fire all night—an important feature for me, as I would be the one getting up in the night to stoke the stove. I prefer a full night’s sleep, uninterrupted by chores. Our wood heater backs up into a brick fireplace, but has its own triple-wall chimney that follows the flue out the top. If the mass of the brick hearth cools, we lose a good deal of heat.

After one particularly cold autumn night, an apprentice for our business mentioned that he had lit the first fire of the season and wanted to know if we had. Bob-O admitted we had. “How long will it burn?” the apprentice asked.

“Oh, if it’s up to Kathleen,” Bob-O replied, “‘til April.”

I admit it—I’m a hothouse flower. I do not want to be cold in my own home. This inclination has selected me as the home fire-tender. I bring in the firewood (although Bob-O actually helps me a lot), I clean the ashes out, I start the fires, and I bring last night’s coals back to life. Sometimes I chop kindling. With our old heater, having to use kindling to make the heater come alive in the morning was rare. I could stuff it full of wood at night, close all the drafts, and there would be good coals to work with in the morning. It would take some time and effort to get a fire crackling again, but I became very good at it.

Bill installed our Black Bear, instructing me to initially make four small fires—each just big enough to make the outside too hot to touch, with a cool-down period between each fire—to season the cast iron.

It took awhile to get used to the new heater. Jøtul has a non-catalytic, secondary combustion system—which always leaves a small draft in the heater—and burns the fuel differently than the old heater. We had to learn to let the fire die down a little before we stoked it. The Jøtul had the reputation of being a good coal-keeper. In fact, it is so amazing at keeping coals alive that we renamed it “Lazarus”—it brings the fire back from the dead every time.

## Warm Winter Jøtuling

We entered this last winter wondering if we would like the Jøtul. I can safely say we love it. We burned the same amount of wood (three cords of seasoned hardwood), but I *felt* warmer. It was a long, cold spring, so it was hard to judge whether the Jøtul burned our wood more slowly than the old heater.

What I do know is that the Jøtul provides steady, continuous warmth. I chopped kindling maybe five times all winter and Bob-O the same. Some of those times were when we had been gone for days and would return to a frigid house. We always bring in kindling and wood right before



Courtesy Bob-O Schultze

**Until December 31, 2010, homeowners can get a 30% federal tax credit for purchasing and installing a wood heater with at least a 75% thermal rating.**

we leave. Next to the hearth, I keep newspapers in my dad’s old olive-curing crock. When we return home, everything we need is at the ready to get a good fire going and begin heating up the brick hearth. It takes a day and a half to warm the mass of brick.

When Bill installed our stovepipe years ago, he told us we would never be able to use the fireplace again. We did not mind in the least. Fireplaces are so inefficient, and I imagine them to be quite messy—even messier than having a wood stove in your living room. We’ve never regretted the decision to modify the fireplace flue.

I would not have thought there would be a lot of new technology in wood heating, but our Jøtul has proven me wrong. The difference between the old and the new was not the size or capacity, but the way it burns the wood so efficiently and provides the coals for the next day’s fire. I should have realized the words on the front plaque were not just for decoration, but righteous bragging about a really good wood heater. “When day is done, God will my flame never die out.”

## Access

Kathleen Jarschke-Schultze ([kathleen.jarschke-schultze@homepower.com](mailto:kathleen.jarschke-schultze@homepower.com)) grew up in the Napa Valley amidst a large, raucous family who always saw life as an adventure to be experienced and enjoyed. Twenty-five years of living beyond power lines with her husband Bob-O has provided that adventure, tempered with growing knowledge, and fraught with humor.



Specializing in photovoltaic system design of any type.

Call one of our solar design technicians for system design or visit our web store for thousands of renewable energy products.

800-383-0195



**NORTHERN ARIZONA**  
**WIND & SUN**  
Electricity From the Sun

<http://store.solar-electric.com>  
4091 E Huntington Dr • Flagstaff, AZ 86004  
Providing renewable energy since 1979

**PowerSpout.com**  
WATER DOES IT. POWER COMES OUT.

Generate electricity from naturally falling water

Clean, renewable energy for a reliable, secure power supply you can feel good about.

Sustainably manufactured with up to 68% recycled components, using renewable energy.

Power an energy-efficient home, or run multiple units at suitable sites for larger demands.

All-weather PowerSpout is one of the most reliable, cost-effective generators

[www.powerspout.com](http://www.powerspout.com)

Introducing the Powerspout

ROBUST  
COST EFFECTIVE  
TECHNICALLY ADVANCED  
FLEXIBLE

see it in action at

**PowerSpout.com**  
WATER DOES IT. POWER COMES OUT.



**BZ Products Model MPPT500**  
**500 watt 45 amp Maximum**  
**Power Point Solar Control**

- Up to 45 amp output current
- 500 watt PV input
- Universal PV input 12 to 48 volts
- 12, 24 or 48 volt output

**BZ Products**  
**Model MPPT250**  
**250 watt 25 amp Maximum**  
**Power Point Solar Control**



- Up to 25 amp output current
- 250 watt PV input
- 12 to 48 volt PV input
- 15 amp low voltage disconnect standard
- Aux battery trickle charger standard, optional enclosure available

**Both Controllers offer:**

- Boost charge current up to 30%
- Microprocessor control
- 95% efficient
- Digital metering
- PWM float control
- Battery temperature sensor standard
- Five-year warranty
- Made in U.S.A.



**BZ Products, Inc.**

314-644-2490 • [www.bzproducts.net](http://www.bzproducts.net) • [bzp@bzproducts.net](mailto:bzp@bzproducts.net)  
7914 Gravois, St. Louis, MO 63123, USA

**Hot Day.**  
**No electricity. No problem.**



Solar to Polar™ AC unit

**[www.greenprm.com](http://www.greenprm.com)**

**solutions for renewable energy**  
**solutions for a renewable future**



Toll-free 800/924-0757





## AUTOMAGIC BATTERY WATERING



### WE MAKE WATER FROM YOUR GAS

Hydrogen and oxygen battery gas catalytically recombined into pure water and returned to each battery cell. Keeps battery topped off for extended periods of time and reduces maintenance costs. Explosive hydrogen gas is virtually eliminated from the battery area. Corrosive spray and fumes are contained and washed back into each battery cell. Electrolyte kept strong longer, extending the useful power and life of the battery. HYDROCAP Vents simply replace the battery's caps. Battery maintenance is greatly reduced. Write or call for more information.



Things that Work!

**Hydrocap**  
CATALYST BATTERY CAPS®

305-696-2504  
975 NW 95 St.  
Miami, FL 33150

## Solar Panels • Wind Turbines • DC Lighting



**ABS Alaskan, Inc.**

Alternative Energy & Remote Power

2130 Van Horn, Fairbanks, AK 99701

toll free: 800-235-0689 fax: 907-451-1949

visit us online: [www.absAK.com](http://www.absAK.com)

Alaska Battery Anchorage, AK ph: 907-562-4949 fax: 907-563-4900

Distribution Center Renton, WA ph: 425-251-5745 fax: 425-251-5748

Micro Hydro • Complete Systems • & More



Things that Work!  
Model 4-1850  
Home Power #67

## Digital Power Meters

**20-CTR:** Measures AC Power up to 10 kW, 100-250 vac single or two phase.

New USB plug in meter, up to 1 gig of flash memory!

**ONEMeter:** Standard Features include Multiple AC or DC power channels, PC interface, internal logging. Options include Web Interface, Weather Monitoring, and lots more.

**4-1850WK:** Special meter for Refrigerator Replacement Programs. Detects Defrost Cycle, displays cost/kWh-hrs/yr. Other Models available. Check our website or call for details.

All products are California CEC eligible meters

**Brand Electronics**  
[info@brandelectronics.com](mailto:info@brandelectronics.com)

Ordering or Information call

**(269)-365-7744**

[www.brandelectronics.com](http://www.brandelectronics.com)

# RESOL®

Controllers for solar thermal systems

## DeltaSol® BS Plus



cTUVus certified!

### Familiar outside, brand new inside!

- Thermostat function
- Unit °F and °C selectable
- 2 relays for pump speed control
- Drainback option including booster function
- RESOLVBus® data interface
- 10 systems selectable
- Energy metering
- Function control



You want to learn more about solar thermal control technology?

Visit us at Solar Power International in L.A. (South Hall/booth 4627)

Or secure your place in our training on October the 15th in L.A.

Sign up at [info@resol.de](mailto:info@resol.de)

**[www.resol.com](http://www.resol.com)**

## User Friendly Hydro Power

### Alternative Power & Machine

Now Featuring Permanent Magnet Alternators



4040 Highland Ave. Unit #H • Grants Pass, OR 97526 • 541-476-8916

altpower@grantspass.com

[www.apmhydro.com](http://www.apmhydro.com)

## Local PC & Internet Monitoring of Your RE Systems



RightHand Engineering, LLC

[www.RightHandEng.com](http://www.RightHandEng.com)

(425) 844-1291



877.715.4448

\$9.99  
20hrs  
Basic

\$19.99  
30hrs  
Super

\$29.99  
80hrs  
Ultra

[www.9vlight.com](http://www.9vlight.com)

• Simmons •  
Natural Bodycare  
[simmonsnatural.com](http://simmonsnatural.com)  
MAKING  
EVERYDAY  
SPECIAL  
Off the grid since 1982

WORKING TOWARD A SUSTAINABLE FUTURE •

## H-HYDRO.COM

A turbine sized to your site:  
from 50W to 500kW,  
82-700mm pitch diameter.



Do-it-yourself or OEM  
Engineered composite  
or hardened stainless spoons.  
Since 1999.  
Custom systems from 2kW up.



2010 edition books are now available on  
[www.amazon.com](http://www.amazon.com) from a world leading expert  
in solar photovoltaics. Just search "Steven  
Magee Solar" on [amazon.com](http://amazon.com). These are the  
ideal books for teaching solar photovoltaics.  
Also available at many good book shops.

Build it right and invest well.  
Solar Photovoltaic Consulting: 520-247-6282

eSun

Delivering Clean Energy... for Good!

## Harvest the Sun

Now, with the new utility, state and federal incentives, there has  
never been a better time to harness the sun!

- We take the hassle and complication out of purchasing and owning your own solar system
- Pre-engineered systems delivered to your home
- More affordable and reliable than ever
- Generate your own clean renewable energy

530-478-0996

[www.esun-solar-systems.com](http://www.esun-solar-systems.com) • [amb@pacrenew.com](mailto:amb@pacrenew.com)

## HASSLE-FREE HYDRO POWER

BRUSHLESS  
HARDENED STAINLESS RUNNER  
BATTERIES OR GRID-TIE  
NO ADJUSTMENTS

Head Range: 30' - 500'

Flow Range: 5 - 600gpm

Power Range: DC Direct: 750W; 1500W

AC/DC Units: 1200W - 4KW

Transmission Voltage: DC Units: 12-120VDC

AC Units: 240VAC or 440VAC

Battery Voltage: 12, 24, 48V



## HYDRO INDUCTION POWER

[www.hipowerhydro.com](http://www.hipowerhydro.com)

707-923-3507

[www.homehydro.com](http://www.homehydro.com)



A&C Green Energy.....	120	Hydroscreen Co. LLC.....	116	SnapNrack.....	15
AAA Solar Supply.....	120	Innovative Solar Inc.....	58	Solar Depot Inc.....	IFC/1
ABS Alaskan Inc. ....	125	Label-Wright LLC .....	114	Solar Energy International .....	82
AEE Solar Inc. ....	3	Lighthousesolar Franchising .....	40	Solar Heat Exchange Manufacturing...	121
Affordable Solar.....	31	Lumos.....	41	Solar Pathfinder.....	73
aleo solar North America .....	21	Magnum Energy.....	49	SolarEdge Technologies.....	23
altE.....	10/11	Maverick Solar.....	96	SolarElectricDistributor.com.....	IBC
Alternative Power & Machine .....	126	MidNite Solar Inc.....	115, 117	SolarWorld California LLC .....	27
Apex Solar .....	116	Midwest Renewable Energy Assoc. ....	117	Solectria Renewables .....	25
Array Technologies .....	64	Mitsubishi Electric.....	95	Solmetric Corp.....	12
ART TEC LLC .....	56	MK Battery .....	17	SolSolutions LLC .....	121
Backwoods Solar Electric Systems.....	47	Morningstar Corp. ....	39	Steca Elektronik GmbH.....	116
Bogart Engineering .....	42	NABCEP .....	20	Steven Magee Solar .....	126
Bornay .....	83	Nextek Power Systems Inc.....	121	Stiebel Eltron Inc. ....	75
Brand Electronics.....	125	Northern Arizona Wind & Sun.....	124	Sun Electronics.....	72
Butler Sun Solutions Inc. ....	117	Northwest Energy Storage .....	56	Sun Pumps Inc.....	114
BZ Products .....	124	ONTILITY .....	37	SunDanzer.....	42
C Crane Co.....	64	OutBack Power Systems.....	8/9	SunEarth.....	114
Carling Technologies Inc. ....	113	Pacific Renewables Group .....	126	Sunward .....	46
Conergy Inc.....	43	Pak-Lite Company.....	126	SunWize Technologies.....	65
DC Power Systems Inc. ....	63	PowerSpout .....	124	SunXtender .....	30
EasyFlex .....	22	Quick Mount PV.....	4	Super Bright LEDs.....	58
Electron Connection .....	106	RAE Storage Battery Co. ....	119	TALCO Electronics .....	59
Energy Systems & Design.....	120	REC.....	2	Thermomax.....	64
Enphase Energy.....	16	Redwood Alliance.....	116	Tianwei New Energy Holdings Co. LTD.	57
Fronius USA LLC .....	33	RESOL.....	125	Trina Solar Ltd. ....	35
Fullriver Battery USA.....	45	RightHand Engineering.....	126	Trojan Battery Co. ....	107
Green Power Resource Mgmt. Inc. ....	124	Rolls Battery Engineering .....	74	U.S. Battery .....	48
Harris Hydro.....	96	S-5!.....	24	UniRac Inc.....	13
Hartvigsen-Hydro .....	126	Sanyo Energy USA Corp. ....	BC	US Solar Distributing.....	29
Haticon Solar LLC .....	73	Schletter Inc.....	96	Wagan Corporation .....	82
Heliodyne Inc. ....	58	Simmons Natural Bodycare.....	126	WindMax Green Energy .....	73
Hydro Induction Power .....	126	Skystream .....	97	Zomeworks Corp.....	121
Hydrocap Corp. ....	125	SMA America LLC .....	5		

For easy online access to advertisers, visit [www.homepower.com/resources/advertisers](http://www.homepower.com/resources/advertisers)

## When Do You Need a Charge Controller?

Whenever you have a charging source (solar-electric system, or hydro, wind, or engine generator) connected to the batteries, controlling the rate of charge is vital.

Charge controllers protect RE system batteries by managing the amount of energy the battery receives. Overdischarging and undercharging can lead to decreased capacity, early failure, and replacement of an expensive component. Controllers adjust their behavior based on battery voltage. Besides managing the current to the batteries, some controllers can act as load controllers, disconnecting DC loads if battery voltage gets too low. For wind and hydro systems, with outputs that should not be turned off, some charge controllers can be used as diversion controllers, sending excess power to a DC heating element instead of overcharging the batteries.

For smaller systems—such as a battery-powered DC light charged by a single PV module—a basic shunt or series controller may be sufficient. Shunt controllers release excess energy as heat, while series devices act like on/off switches. When battery voltage drops below a preset level, the controller switches on the circuit that allows current to move to the batteries. Pulse-width-modulating (PWM) controllers use rapid electronic switching of input, regulating the energy flow by decreasing the amount of their “on” state as batteries become fully charged.

For residential systems, maximum power point tracking (MPPT) controllers allow the PV array to operate at optimal conditions for optimal production. MPPT controllers turn excess array voltage into usable current for battery charging, offering the most energy increase in cooler temperatures and times of lower battery charge—often the case for off-grid PV systems during the short days of winter.

Sizing a charge controller for a PV array depends on the controller type selected (MPPT vs. non-MPPT). Controllers should be sized by the operating voltage and the current of the charging source and, if it is also a load controller, of the load. To size a PWM, series, or shunt charge controller with load control, the array short-circuit current ( $I_{sc}$ ), nominal voltage, and the DC load current and voltage are used. For example, a system consisting of a single 80 W module (12 V nominal;  $I_{sc} = 4.8$  A) that charges a 12 V battery and operates a 60 W, 12 VDC light could safely use a 6 A (or higher), 12 V controller with a load control that disconnects the light when battery voltage is too low:

Charge controller:  $4.8 \text{ A} \times 1 \text{ module in parallel} \times 1.25$  (safety factor to account for high irradiance conditions) = 6 A  
Load control:  $60 \text{ W} \div 12 \text{ V} = 5 \text{ A}$



**Morningstar's TriStar MPPT charge controller (45 or 60 amp) is one option for a whole-house RE system.**

PWM, series, and shunt controllers are typically available in 12, 24, or 48 V nominal, with amperage capacity from 6 to 60 A.

MPPT charge controllers usually do not offer DC load control, since primary loads in residential systems are AC and controlled (and protected from under-voltage) by an inverter. Manufacturers provide maximum PV array voltage and wattage (STC) values on their specification sheets (or offer array string-sizing tools on their Web sites) for MPPT charge controller sizing. Let's say a 60 A MPPT controller's spec sheet shows a maximum array voltage of 150 VDC. The array power the controller can handle depends on the nominal battery bank voltage: at 12 V, the maximum array size the controller can deal with is 800 W; at 24 V, it's 1,600 W; at 48 V, it's 3,200 W. If the array's power capability is higher, look for a higher amperage charge controller, or split the array into subarrays and use multiple charge controllers. MPPT controllers are commonly available in 60 and 80 A.

While a charge controller can help protect batteries, thoughtful system design should account for proper battery sizing. If your loads consistently discharge your batteries, then revisiting the load analysis, battery capacity, and charging requirements might be in order.

—Erika Weliczko



THE SOLAR DISTRIBUTION LEADER THAT PAYS YOU

# SED

**SolarElectricDistributor.com**



SED Proudly Introduces

## **The PV Package Rebate Program**

**Earn Up to \$200 per KW on Pre-Packaged PV Systems Purchased.**

**Double the rebate on your first order.**

**Saving Time & Money While Earning Dollars Makes Sense.**

**Free Shipping\***

**Call S.E.D. Today to Qualify for Your Rebate!**

**866-778-0009**

\*Free Shipping on orders over \$5,000 within Continental US, Standard Palletized ConWay Freight. Non-standards such as lift gate service and residential delivery extra.\*



CONFIDENCE IS A BEAUTIFUL THING.

Introducing the HIT® Double bifacial solar panel. With up to 30% more power than its STC rating, it is the most powerful panel in the world, from a trusted name in the business – SANYO. Innovative in its design and versatile in its application potential, the HIT Double delivers maximum efficiency by producing power from both sides of the panel. At SANYO we are pioneers in power, and we are committed to developing technology you can trust. As powerful as they are beautiful, HIT Double bifacial solar panels by SANYO bring energy independence into your life.

Visit us at  
**SOLAR POWER 2010**  
in L.A., CA Booth #3801

**HIT** Double  
Photovoltaic Module

